SGMPM09330
30V, Power, Single P-Channel, PDFN Package, MOSFET

FEATURES

- **High-Speed Switching**
- **Low On-State Resistance**
- **RoHS Compliant and Halogen Free**

PRODUCT SUMMARY

R_{DSON} (TYP) V_{GS} = -10V	R_{DSON} (MAX) V_{GS} = -10V	I_D (MAX) T_C = +25℃
8.5mΩ	11mΩ	-50A

ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	VALUE	UNITS
Drain-to-Source Voltage		V_{DS}	-30	V
Gate-to-Source Voltage		V_{GS}	±20	V
Drain Current (1)	T_C = +25℃	I_D	-50	A
	T_C = +100℃		-31	
	T_A = +25℃		-10	
	T_A = +70℃		-8	
Drain Current (Pulse) (2)		I_{DM}	-135	A
Total Dissipation	T_C = +25℃	P_D	54	W
	T_C = +100℃		21	
	T_A = +25℃		2.2	
	T_A = +70℃		1.4	
Avalanche Current (3)		I_{AS}	-47.6	A
Avalanche Energy (3)		E_{AS}	113.3	mJ
Junction Temperature		T_J	+150	℃
Storage Temperature Range		T_{STG}	-55 to +150	℃
Lead Temperature (Soldering, 10s)			+260	℃


Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

NOTES:

1. The current will be limited by PCB, thermal design and operating temperature.
2. t_{PULSE} < 10μs.
3. Parts are 100% tested at V_{GS} = -10V, I_L = -33.7A, and E_{AS} = 57mJ.


PIN CONFIGURATION

(TOP VIEW)



PDFN-3.3×3.3-8CL

EQUIVALENT CIRCUIT

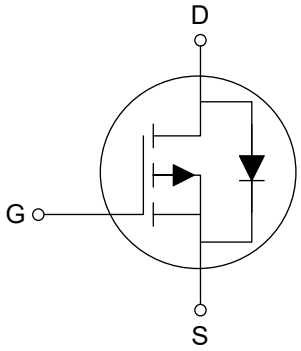

APPLICATIONS


Relay Driver Application
Load Switch Application
High-Speed Line Driver
Handheld and Mobile Application
USB Connector VBUS Power Switch
IR Blaster Application

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGMPM09330	PDFN-3.3×3.3-8CL	-55℃ to +150℃	SGMPM09330TPDC8G/TR	SGM2SK TPDC8 XXXXX	Tape and Reel, 5000

MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

THERMAL RESISTANCE

PARAMETER	SYMBOL	TYP	UNITS
Junction-to-Case Thermal Resistance	$R_{\theta JC}$	2.3	℃/W
Junction-to-Ambient Thermal Resistance (1)	$R_{\theta JA}$	56	℃/W

NOTE: 1. $R_{\theta JA}$ is determined with the device mounted on one square inch of copper pad, 2oz copper on FR4 board.


ELECTRICAL CHARACTERISTICS

(T_A = +25℃, unless otherwise noted.)


PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Static OFF Characteristics						
Drain-to-Source Breakdown Voltage	V_{BR_DSS}	V_{GS} = 0V, I_D = -250μA	-30			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{GS} = 0V, V_{DS} = -24V			-1	μA
Gate-to-Source Leakage Current	I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±100	nA
Static ON Characteristics						
Gate-to-Source Threshold Voltage	V_{GS_TH}	V_{GS} = V_{DS}, I_D = -250μA	-1	-1.7	-2.5	V
Drain-to-Source On-State Resistance	R_{DSON}	V_{GS} = -10V, I_D = -20A		8.5	11	mΩ
		V_{GS} = -4.5V, I_D = -15A		14	18.2	
Forward Transconductance	g_{FS}	V_{DS} = -5V, I_D = -15A		31		S
Gate Resistance	R_G	V_{GS} = 0V, V_{DS} = 0V, f = 1MHz		6		Ω
Diode Characteristics						
Diode Forward Voltage	V_{F_SD}	V_{GS} = 0V, I_S = -20A		-0.7	-1	V
Reverse Recovery Time	t_{RR}	V_{GS} = -10V, I_S = -20A, di/dt = 100A/μs		19		ns
Reverse Recovery Charge	Q_{RR}			12		nC
Dynamic Characteristics						
Input Capacitance	C_{ISS}	V_{GS} = 0V, V_{DS} = -15V, f = 1MHz		2240		pF
Output Capacitance	C_{OSS}			235		
Reverse Transfer Capacitance	C_{RSS}			205		
Total Gate Charge	Q_G	V_{DS} = -15V, I_D = -20A, V_{GS} = -10V		39.4		nC
		V_{DS} = -15V, I_D = -20A, V_{GS} = -4.5V		19		
Gate-to-Source Charge	Q_{GS}	V_{GS} = -4.5V, V_{DS} = -15V, I_D = -20A		7.5		
Gate-to-Drain Charge	Q_{GD}			8.8		
Switch Characteristics						
Turn-On Delay Time	t_{D_ON}	V_{GS} = -10V, V_{DS} = -15V, I_D = -20A, R_G = 3Ω		8		ns
Rise Time	t_R			25		
Turn-Off Delay Time	t_{D_OFF}			97		
Fall Time	t_F			40		

TYPICAL PERFORMANCE CHARACTERISTICS


Output Characteristics

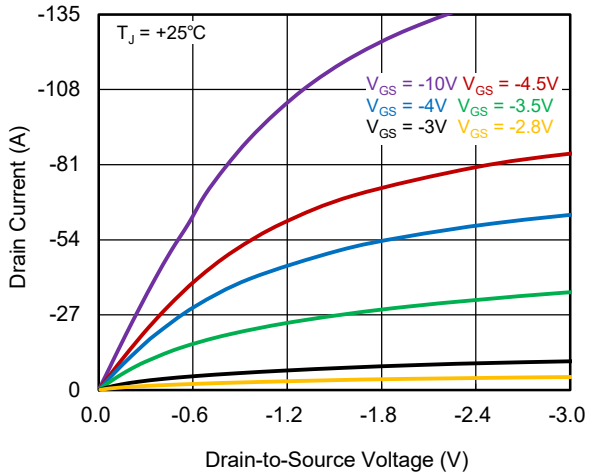


Drain-to-Source On-State Resistance vs. Drain Current

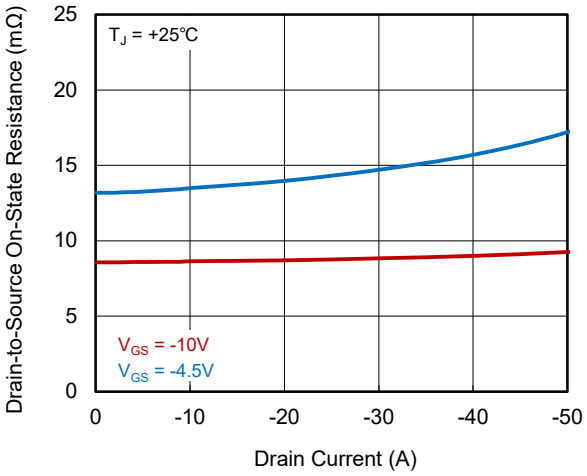


Drain-to-Source On-State Resistance vs. Gate-to-Source Voltage

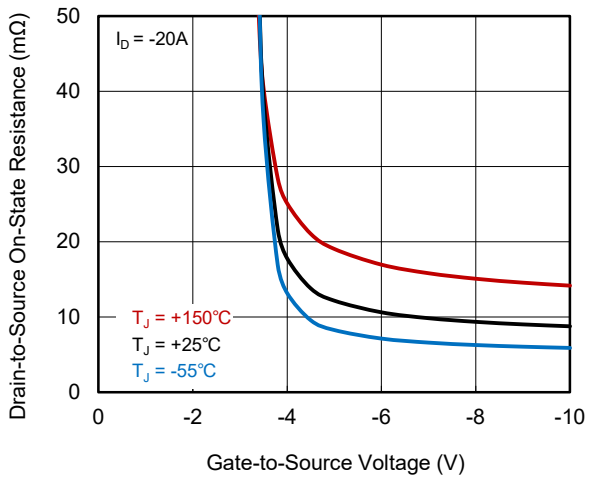


Diode Forward

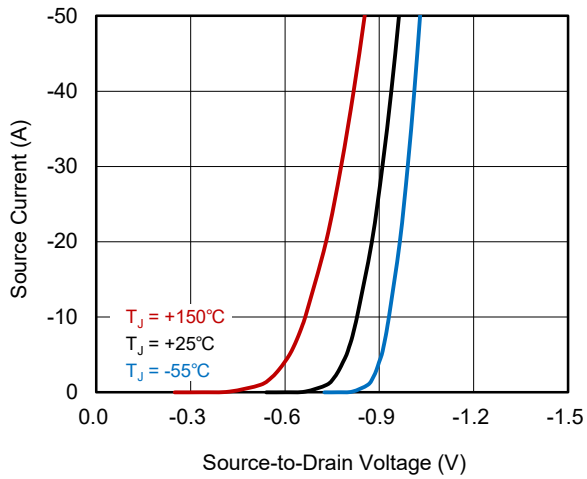

Gate Charge Characteristics

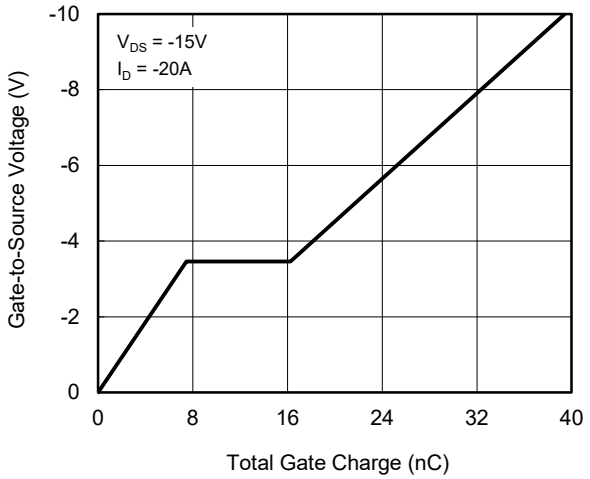


Capacitance Characteristics

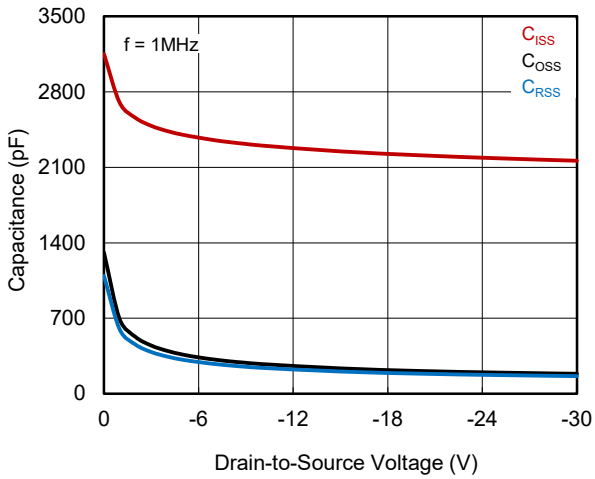


TYPICAL PERFORMANCE CHARACTERISTICS (continued)


Normalized Threshold Voltage vs. Junction Temperature

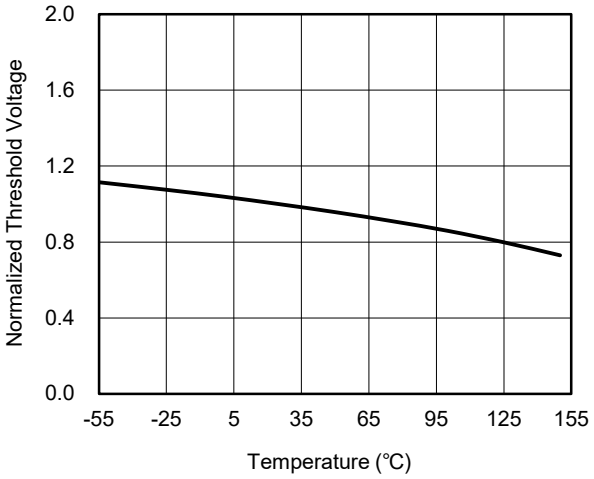


Normalized On-Resistance vs. Junction Temperature

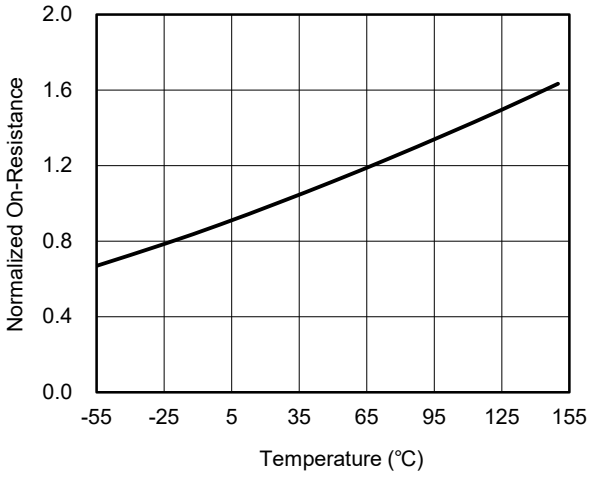


Transfer Characteristics

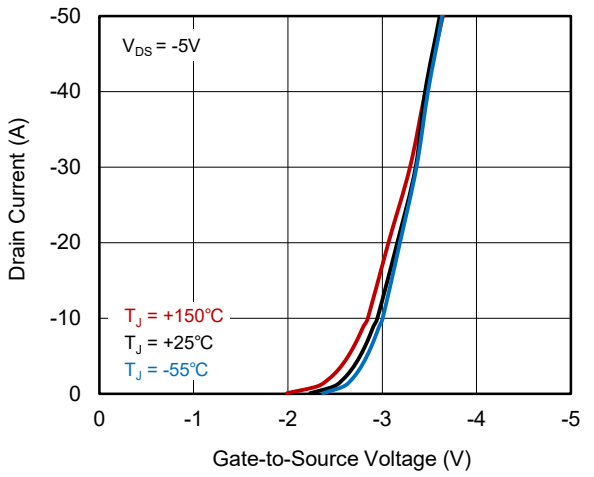


Safe Operating Area

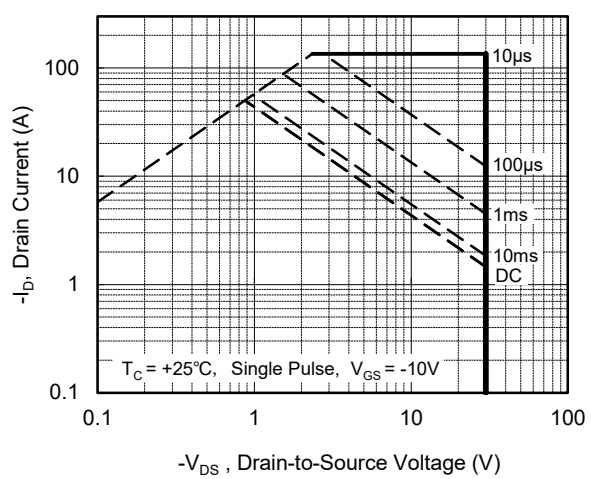


Drain Current vs. Junction Temperature

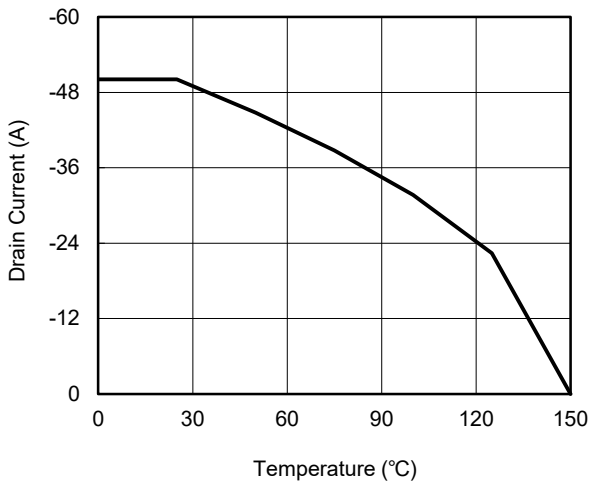

Power Dissipation vs. Junction Temperature

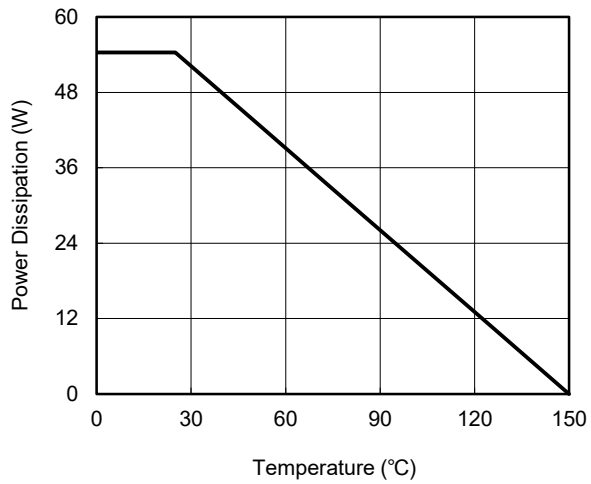

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

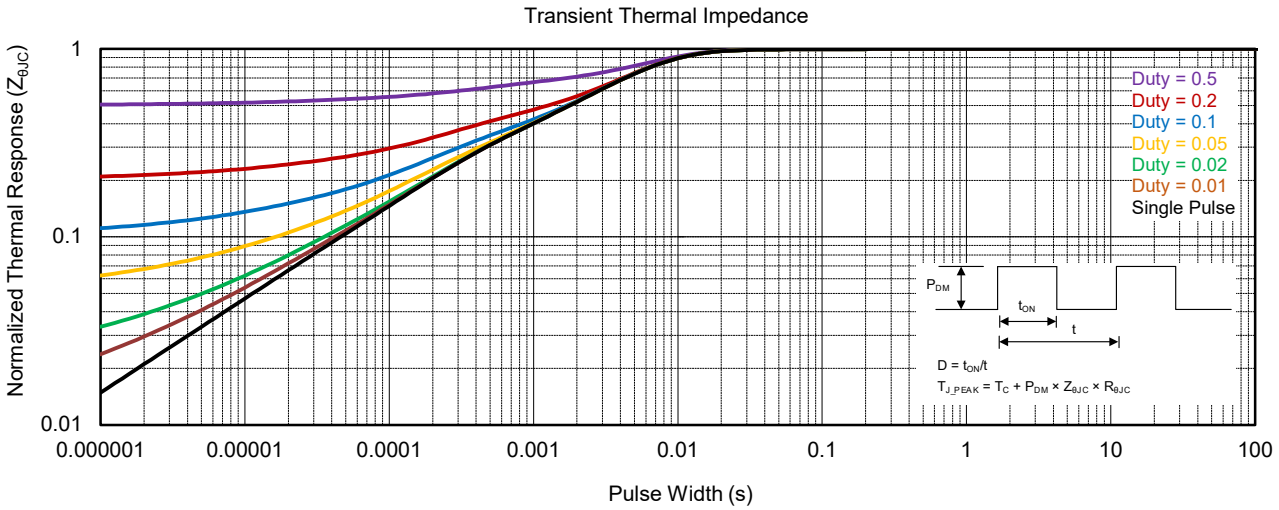


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original to REV.A (OCTOBER 2026)	Page
Changed from product preview to production data	All

PACKAGE OUTLINE DIMENSIONS

PDFN-3.3×3.3-8CL

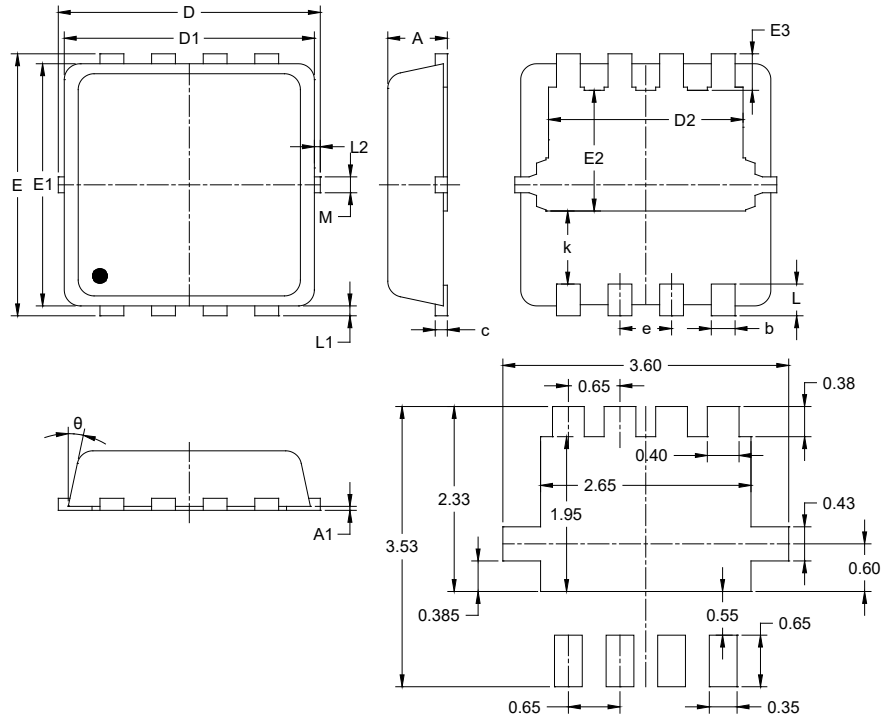


RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.700	-	0.850
A1	-	-	0.050
b	0.200	-	0.400
c	0.100	-	0.250
D	3.150	-	3.450
D1	3.000	-	3.250
D2	2.290	-	2.650
e	0.650 BSC		
E	3.150	-	3.450
E1	2.900	-	3.200
E2	1.320	-	1.720
E3	0.280	-	0.650
k	0.920 REF		
L	0.300	-	0.500
L1	0.060	-	0.200
L2	0.000	-	0.130
M	0.200 REF		
θ	10°	-	14°


NOTES:
1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

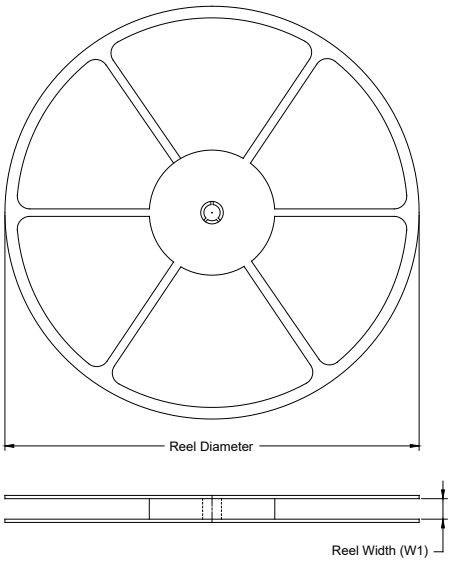

TAPE DIMENSIONS

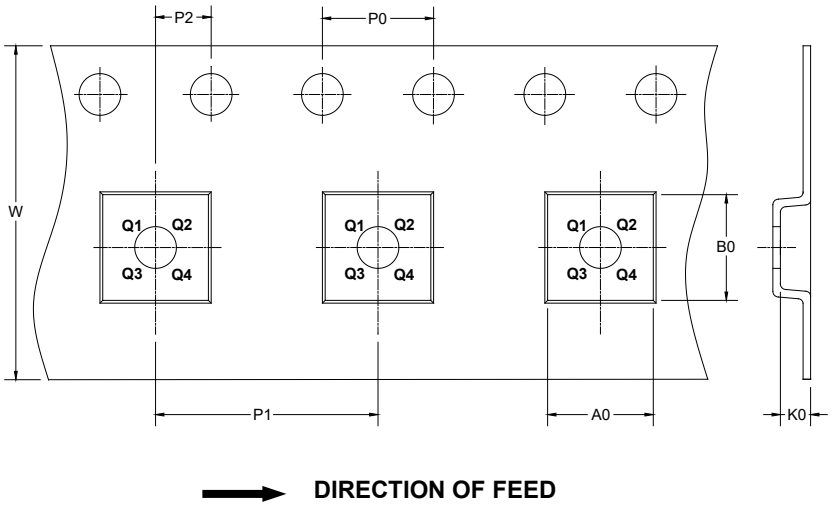


NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
PDFN-3.3×3.3-8CL	13"	12.4	3.60	3.60	1.10	4.0	8.0	2.0	12.0	Q1

DD0001

CARTON BOX DIMENSIONS

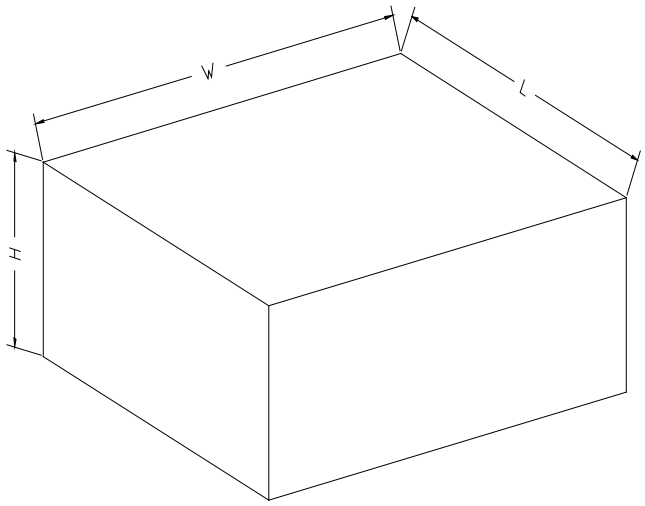

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13″	386	280	370	5

DD0002