

GENERAL DESCRIPTION

The SGM8192-1 current-sense differential amplifier delivers a cost-effective solution for precision current measurement across industrial, medical, telecom and computing applications. The device senses the voltage across a current-sense resistor at common mode voltage from -0.2V to 30V, functionality independent of the supply voltage. The SGM8192-1 integrates a matched resistor gain network with a choice of two fixed gains: 20V/V or 50V/V. This precision-matched architecture minimizes gain error and reduces temperature drift.

The SGM8192-1 operates from a single 2.7V to 5.5V power supply. It draws a typical supply current of 220 μ A.

The SGM8192-1 is available in a Green SOT-23-5 package. It is specified over the extended -40°C to +125°C temperature range.

APPLICATIONS

Industrial Equipment
Medical Equipment
Telecom Equipment
Computing: Notebook, Server

FEATURES

- **Power Supply Range:** 2.7V to 5.5V
- **Common Mode Range:** -0.2V to 30V
- **High Bandwidth:**
 - ♦ SGM8192-1xA1: 450kHz (TYP)
 - ♦ SGM8192-1xA2: 290kHz (TYP)
- **Output Slew Rate:**
 - ♦ SGM8192-1xA1: 2V/ μ s (TYP)
 - ♦ SGM8192-1xA2: 2V/ μ s (TYP)
- **Gain Options:**
 - ♦ SGM8192-1xA1 Gain: 20V/V
 - ♦ SGM8192-1xA2 Gain: 50V/V
- **Gain Error:**
 - ♦ SGM8192-1xA1: $\pm 0.03\%$ (TYP)
 - ♦ SGM8192-1xA2: $\pm 0.02\%$ (TYP)
- **Input Offset Voltage:**
 - ♦ SGM8192-1xA1/A2: $\pm 35\mu$ V (TYP) at $V_{CM} = 0V$
 - ♦ SGM8192-1xA1: $\pm 150\mu$ V (TYP) at $V_{CM} = 12V$
 - ♦ SGM8192-1xA2: $\pm 50\mu$ V (TYP) at $V_{CM} = 12V$
- **Quiescent Current:** 220 μ A (TYP)
- **-40°C to +125°C Operating Temperature Range**
- **Available in a Green SOT-23-5 Package**

TYPICAL APPLICATION

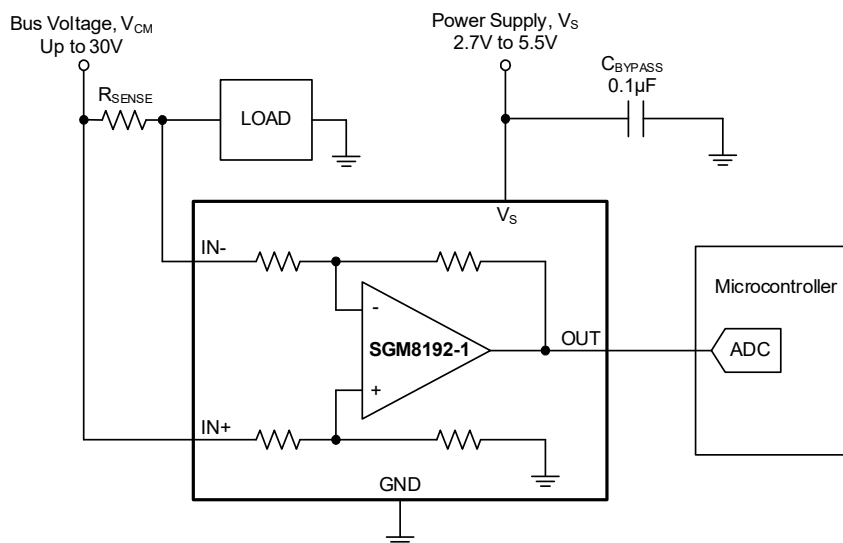


Figure 1. Typical Application Circuit


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8192-1AA1 (Gain = 20V/V)	SOT-23-5	-40°C to +125°C	SGM8192-1AA1XN5G/TR	2VQ XXXXX	Tape and Reel, 3000
SGM8192-1AA2 (Gain = 50V/V)	SOT-23-5	-40°C to +125°C	SGM8192-1AA2XN5G/TR	2EC XXXXX	Tape and Reel, 3000
SGM8192-1BA1 (Gain = 20V/V)	SOT-23-5	-40°C to +125°C	SGM8192-1BA1XN5G/TR	2VR XXXXX	Tape and Reel, 3000
SGM8192-1BA2 (Gain = 50V/V)	SOT-23-5	-40°C to +125°C	SGM8192-1BA2XN5G/TR	2M5 XXXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_S	6.0V
Analog Inputs, $IN+$, $IN-$ ⁽¹⁾	
Differential (V_{IN+}) - (V_{IN-}).....	-32V to 32V
Common Mode ⁽²⁾	GND - 0.3V to 32V
Output Voltage.....	GND - 0.3V to $V_S + 0.3V$
Maximum Output Current, I_{OUT}	$\pm 25mA$
Package Thermal Resistance	
SOT-23-5, θ_{JA}	154.1°C/W
SOT-23-5, θ_{JB}	33.1°C/W
SOT-23-5, θ_{JC}	75.5°C/W
Junction Temperature.....	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility ^{(3) (4)}	
HBM.....	$\pm 4000V$
CDM.....	$\pm 1000V$

NOTES:

1. V_{IN+} and V_{IN-} are the voltages at the pins $IN+$ and $IN-$.
2. The input voltage at any pin may exceed the indicated voltage if the current at that pin is limited to 5mA.
3. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
4. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

RECOMMENDED OPERATING CONDITIONS

Input Common Mode Voltage ($IN+$ and $IN-$), V_{CM}	-0.2V to 30V, 12V (TYP)
Operating Supply Voltage, V_S	2.7V to 5.5V, 5V (TYP)
Operating Temperature Range.....	-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.



ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

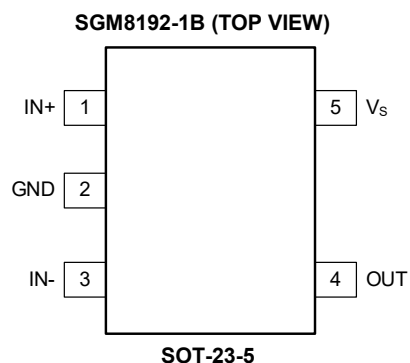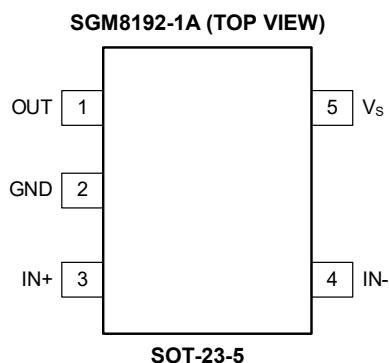

PIN DESCRIPTION

PIN		NAME	FUNCTION
SGM8192-1A	SGM8192-1B		
1	4	OUT	Output of Current-Sense Amplifier.
2	2	GND	Ground.
3	1	IN+	Non-Inverting Input of Current-Sense Amplifier. For high-side applications, please put this pin at bus-voltage side of amplifier sense resistor. For low-side applications, please put this pin at load side of amplifier sense resistor.
4	3	IN-	Inverting Input of Current-Sense Amplifier. For high-side applications, please put this pin at load side of amplifier sense resistor. For low-side applications, please put this pin at ground side of amplifier sense resistor.
5	5	V_s	Power Supply.


ELECTRICAL CHARACTERISTICS

(V_S = 5V, V_{IN+} = 12V, V_{SENSE} = V_{IN+} - V_{IN-}, Full = -40°C to +125°C, typical values are at T_A = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		TEMP	MIN	TYP	MAX	UNITS
Input Characteristics								
Input Offset Voltage ⁽¹⁾ , RTI ⁽²⁾	V _{OS}	V _{CM} = 12V	SGM8192-1xA1	+25°C		±150	±300	μV
			SGM8192-1xA2	+25°C		±50	±180	
		V _{CM} = 0V		+25°C		±35	±110	
Input Offset Voltage Drift, RTI ⁽²⁾	ΔV _{OS} /ΔT			Full		0.3	0.7	μV/°C
Input Bias Current	I _B	V _{SENSE} = 0mV, V _{IN+} = 0V		+25°C		0.1		μA
		V _{SENSE} = 0mV		+25°C		50		
Input Offset Current	I _{OS}	V _{SENSE} = 0mV		+25°C		±0.2		μA
Common Mode Rejection Ratio, RTI ⁽²⁾	CMRR	V _{IN+} = 0V to 30V, V _{SENSE} = 10mV	SGM8192-1xA1	Full	90	100		dB
			SGM8192-1xA2	Full	94	110		
Output Characteristics								
Gain	G	SGM8192-1xA1		+25°C		20		V/V
		SGM8192-1xA2		+25°C		50		
Gain Error	GE	V _{OUT} = 0.5V to (V _S - 0.5V)	SGM8192-1xA1	Full		±0.03	±0.2	%
			SGM8192-1xA2	Full		±0.02	±0.2	
Gain Error Drift				Full		1.5	3.5	ppm/°C
Nonlinearity Error		V _{OUT} = 0.5V to (V _S - 0.5V)		+25°C		±0.01		%
Maximum Capacitive Load		No sustained oscillation		+25°C		1		nF
Voltage Output								
Swing to V _S Power Supply Rail ⁽³⁾	V _{SP}	R _L = 10kΩ to GND		Full	V _S - 0.03	V _S - 0.015		V
Swing to GND ⁽³⁾	V _{SN}	R _L = 10kΩ to GND		Full		V _{GD} +0.001	V _{GD} +0.005	V
Frequency Response								
Bandwidth	BW	C _{LOAD} = 10pF	SGM8192-1xA1	+25°C		450		kHz
			SGM8192-1xA2	+25°C		290		
Slew Rate	SR	SGM8192-1xA1		+25°C		2		V/μs
		SGM8192-1xA2		+25°C		2		
Noise, RTI ⁽²⁾								
Voltage Noise Density		SGM8192-1xA1		+25°C		50		nV/√Hz
		SGM8192-1xA2		+25°C		40		
Power Supply								
Quiescent Current	I _Q	V _{SENSE} = 10mV		+25°C		220	300	μA
				Full			320	
Power Supply Rejection Ratio, RTI ⁽²⁾	PSRR	V _S = 2.7V to 5.5V, V _{SENSE} = 10mV		+25°C		±3	±10	μV/V







NOTES:

1. The input offset voltage is measured at linear extrapolation to V_{SENSE} = 0mV with V_{SENSE} = 10% to 90% of full-scale-range.
2. RTI = Referred-to-input.
3. Test swing specifications under overdriven input conditions.

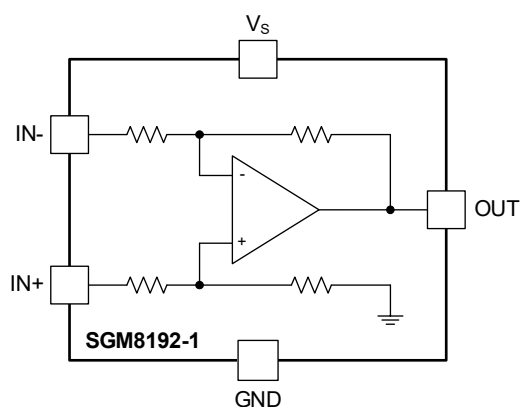FUNCTIONAL BLOCK DIAGRAM**Figure 2. Block Diagram**

TYPICAL PERFORMANCE CHARACTERISTICS


$T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $V_{IN+} = 12\text{V}$, unless otherwise noted.

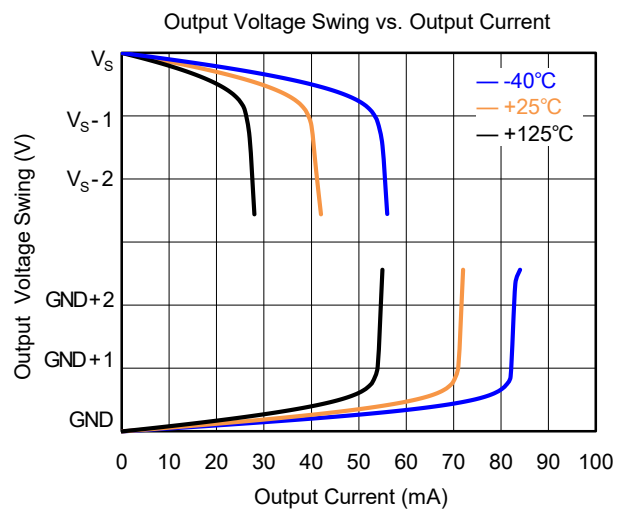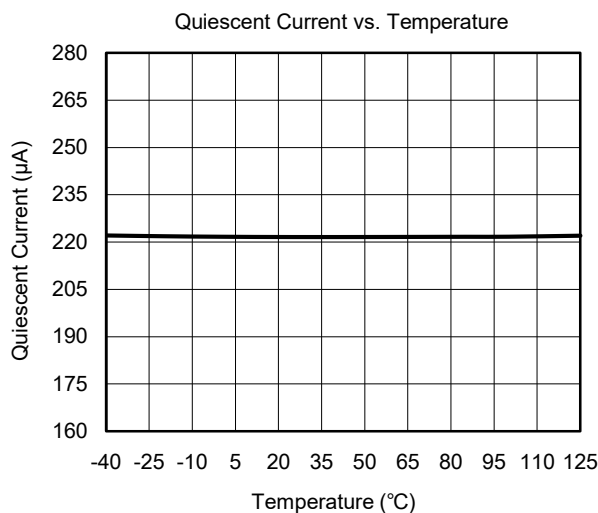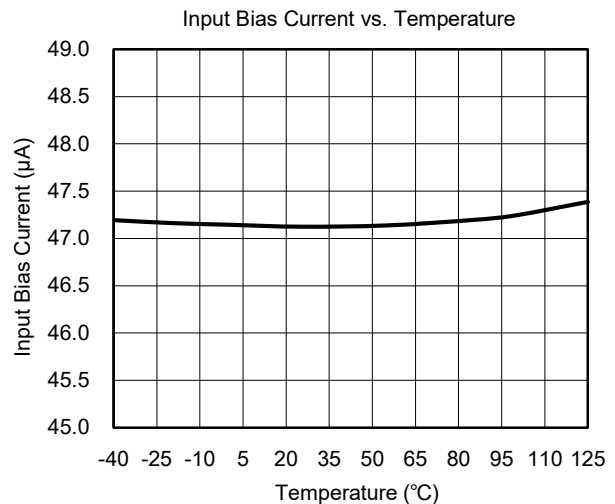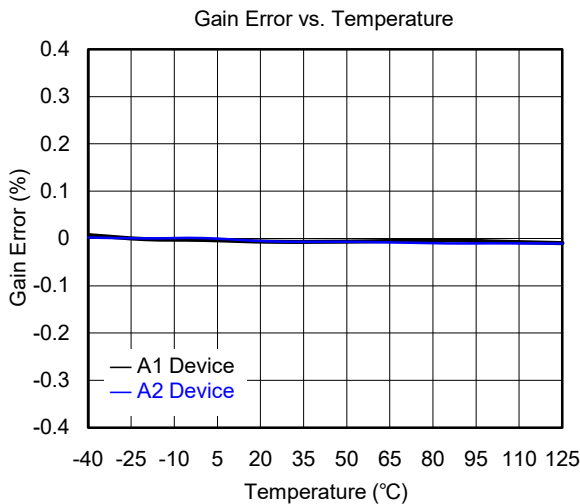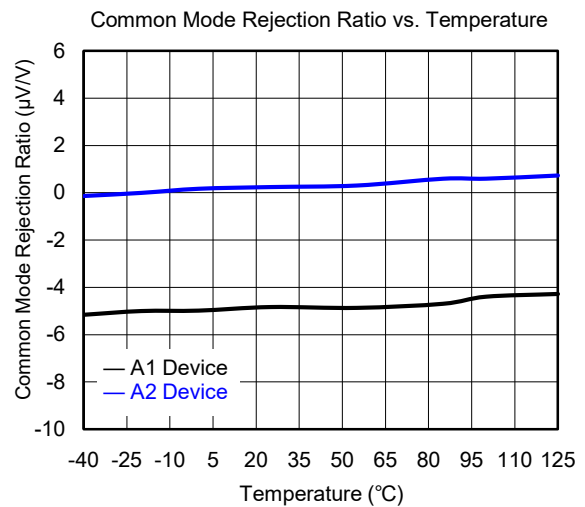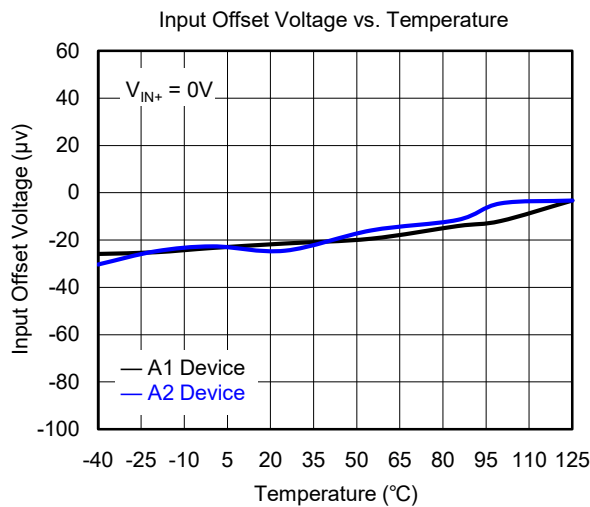


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $V_{IN+} = 12\text{V}$, unless otherwise noted.


Input Bias Current vs. Common Mode Voltage

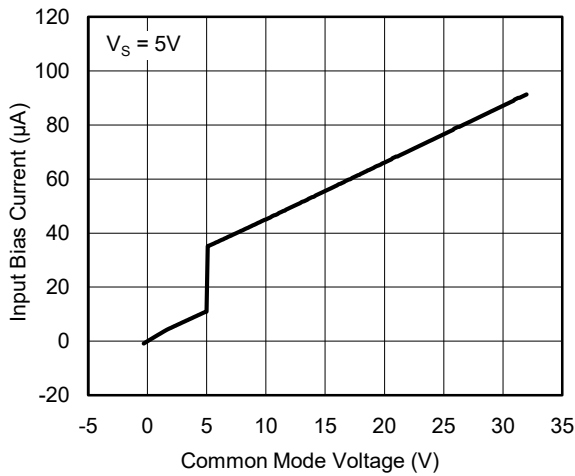


Input Bias Current vs. Common Mode Voltage (Both Inputs, Shutdown)

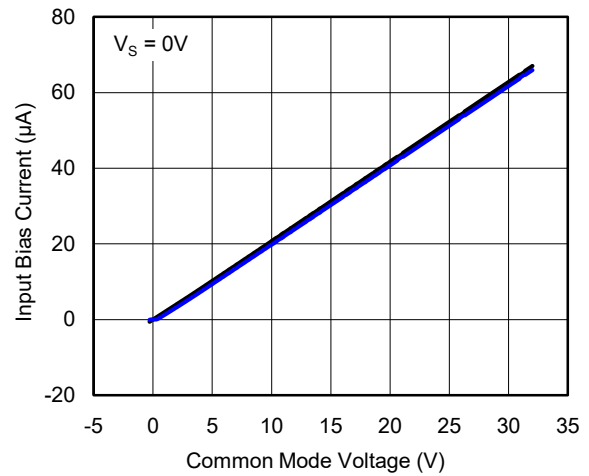


Quiescent Current vs. Common Mode Voltage

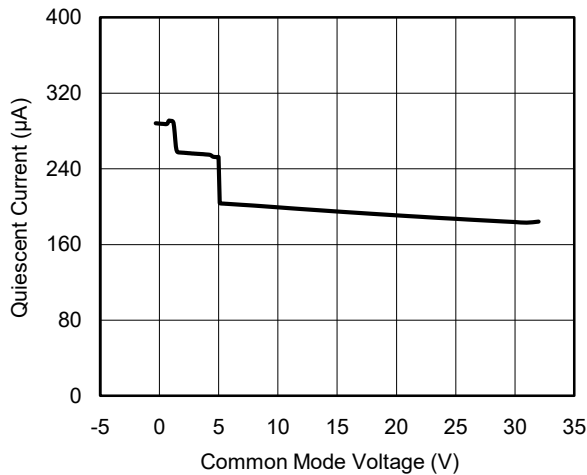


Input Offset Voltage Production Distribution

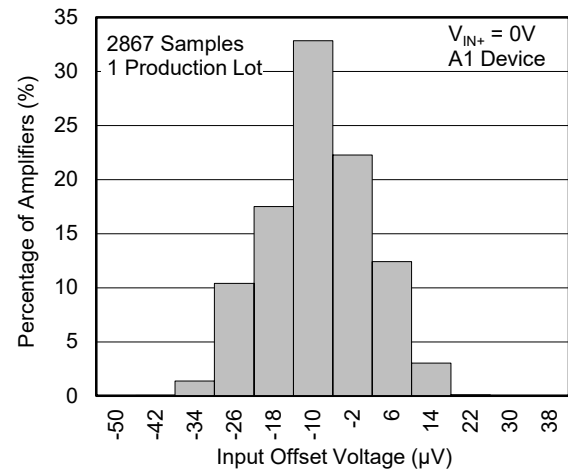

Input Offset Voltage Production Distribution





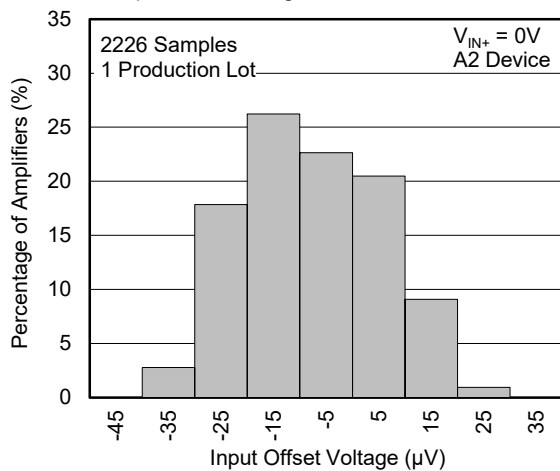


Input Offset Voltage Production Distribution

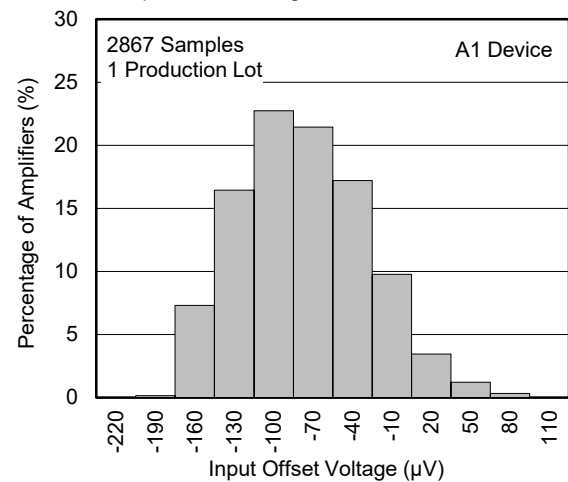





TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $V_{IN+} = 12\text{V}$, unless otherwise noted.

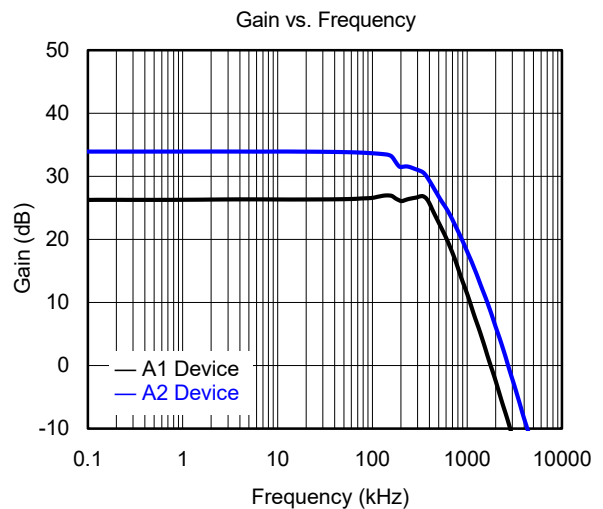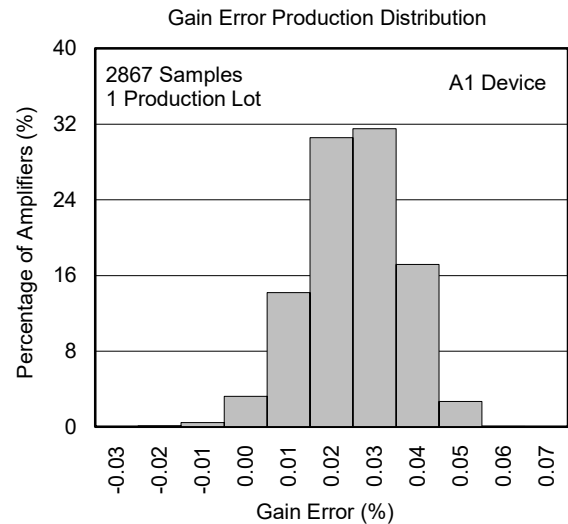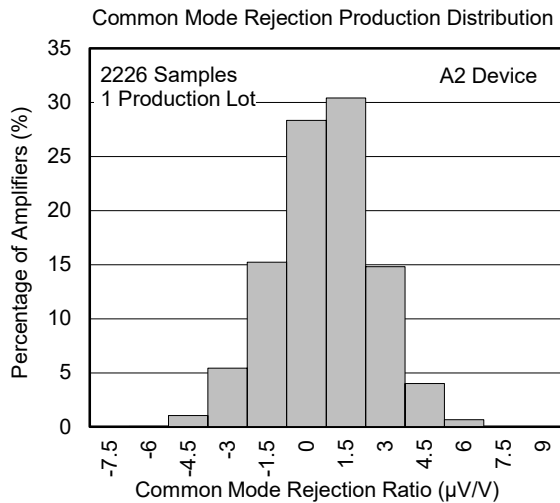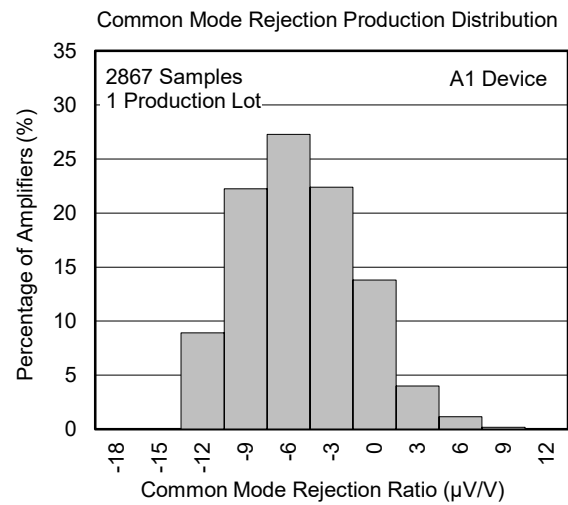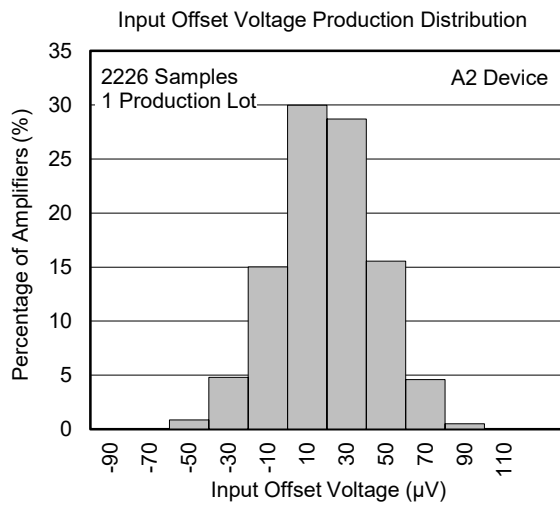


TYPICAL PERFORMANCE CHARACTERISTICS (continued)


$T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $V_{IN+} = 12\text{V}$, unless otherwise noted.

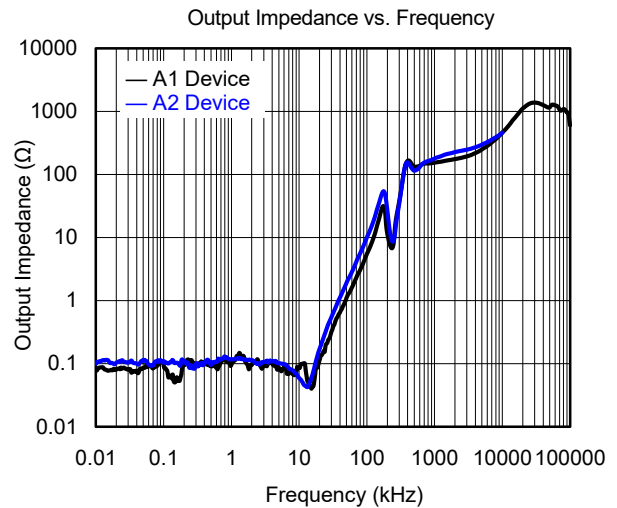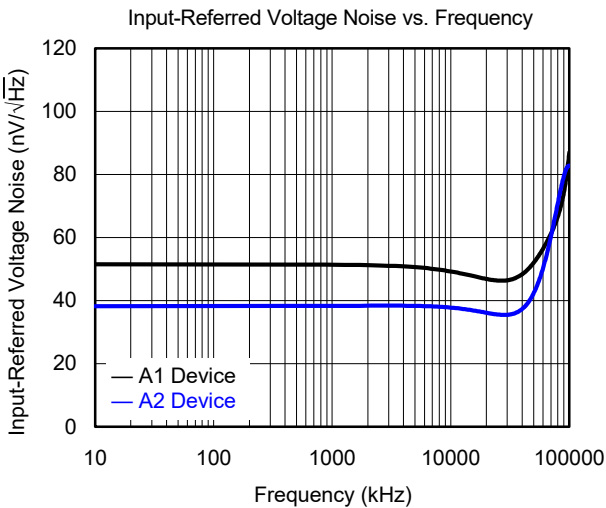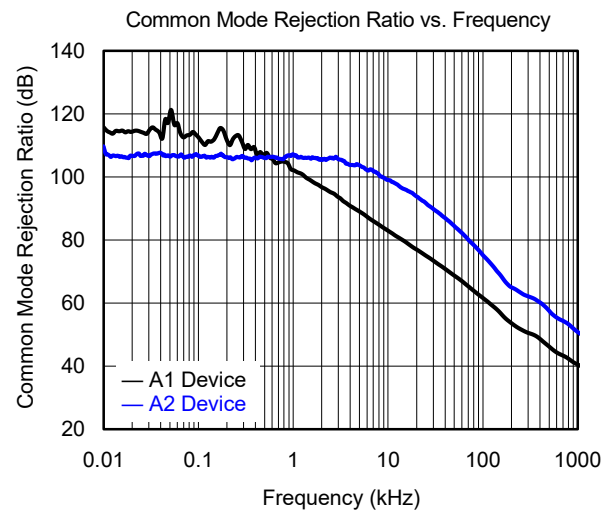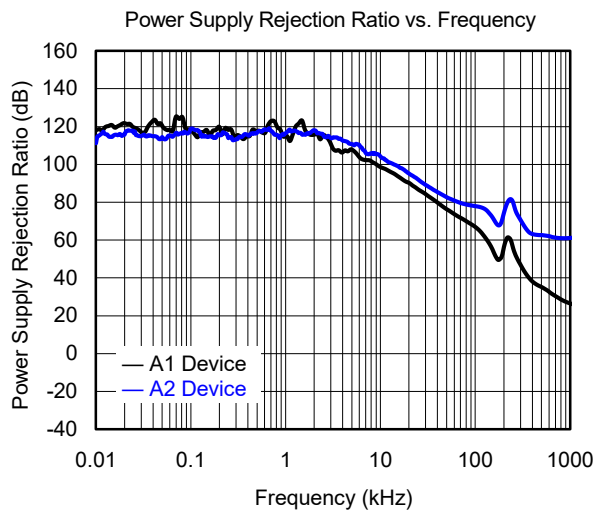

0.1Hz to 10Hz Voltage Noise (Referred-to-Input)

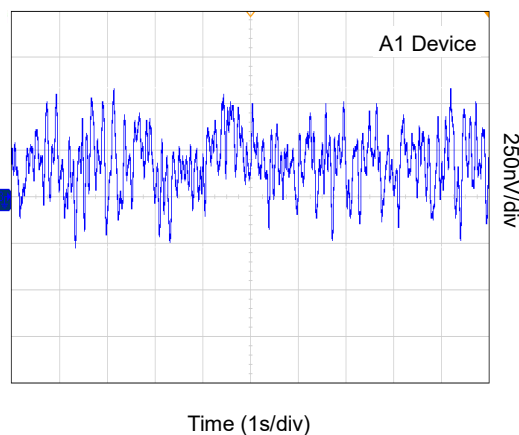


0.1Hz to 10Hz Voltage Noise (Referred-to-Input)

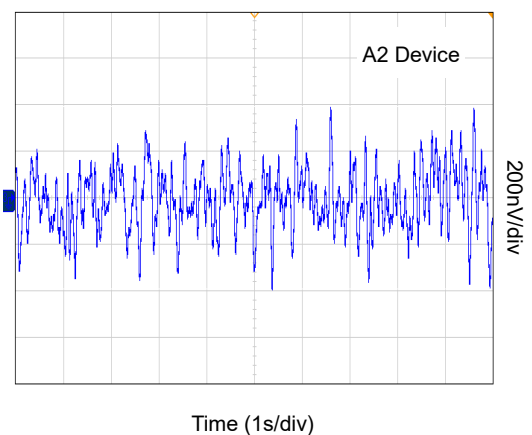


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_A = +25^\circ\text{C}$, $V_S = 5\text{V}$, $V_{IN+} = 12\text{V}$, unless otherwise noted.


Step Response

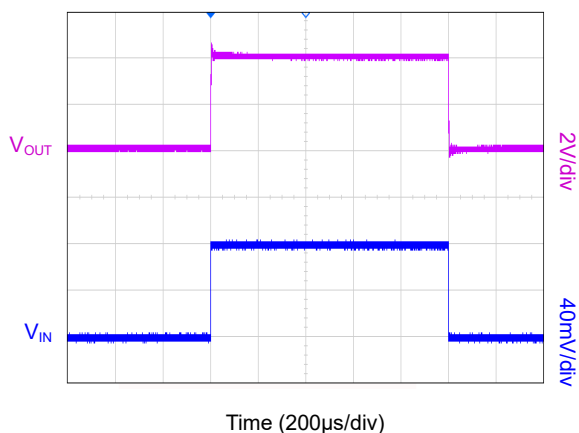


Common Mode Voltage Transient Response

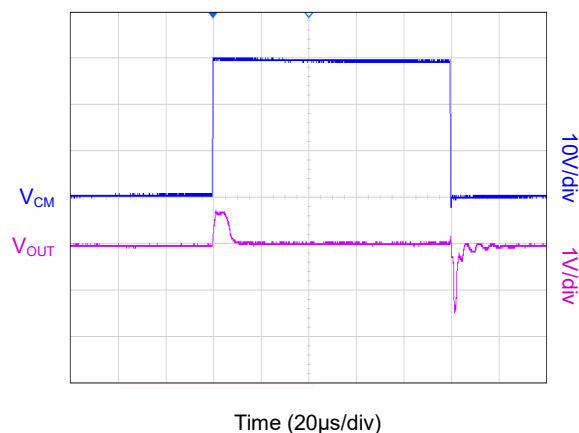


Inverting Differential Input Overload Recovery

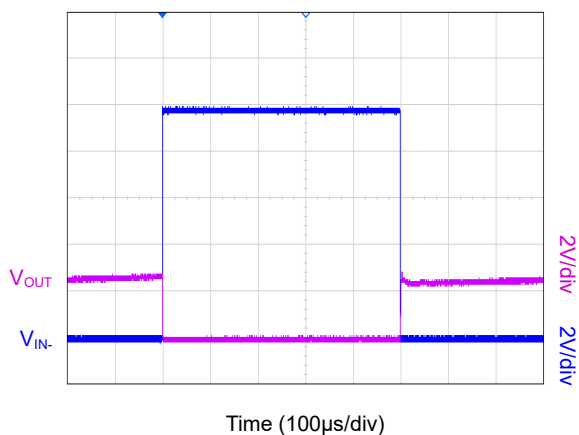


Non-Inverting Differential Input Overload Recovery

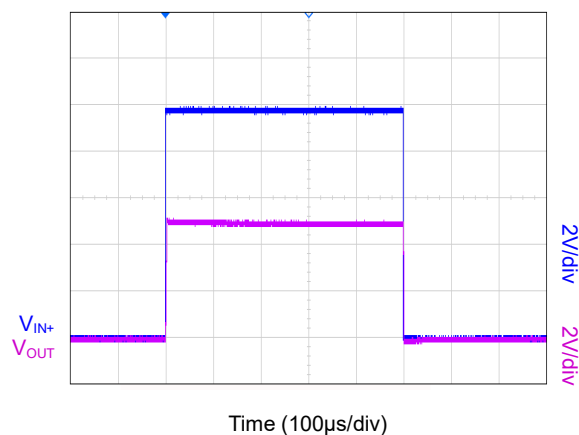

Start-Up Response

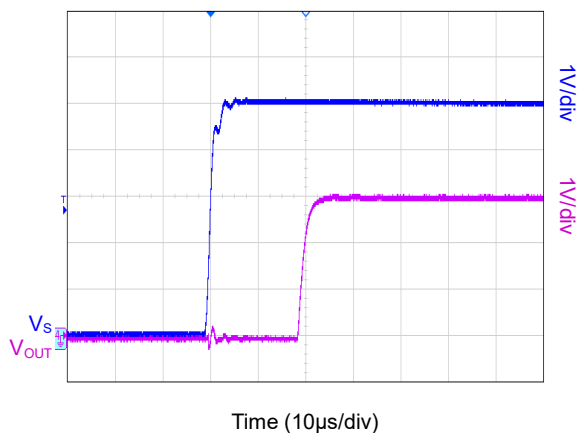

Brownout Recovery

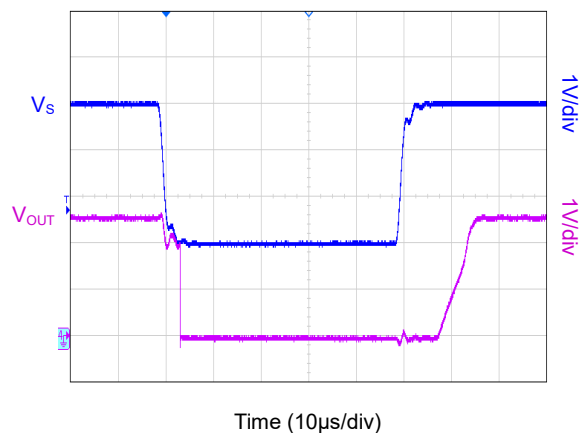

DETAILED DESCRIPTION

Overview

The SGM8192-1 is a current-sensing amplifier that supports both low-side and high-side configurations. Designed for precision measurement, SGM8192-1 accurately resolves voltage differentials across current-sensing resistors even when the common mode voltage exceeds the device's supply voltage. Operating from a supply as low as 2.7V, the amplifier enables current monitoring on input rails up to 30V.

Feature Description

High Bandwidth and Slew Rate

The SGM8192-1 delivers a small-signal bandwidth up to 450kHz and a large-signal slew rate of 2V/ μ s. Combined with rapid output slew capability, this performance enables precise monitoring of fast current transients, positioning the SGM8192-1 as an optimal solution for dynamic current-response applications.

Wide Input Common Mode Voltage Range

The SGM8192-1 supports an input common mode voltage range of -0.2V to +30V, independent of its power supply voltage ($V_S = 2.7V$ to 5.5V). This architectural design decouples the common mode range from the supply voltage, enabling operation even when the input voltage exceeds or falls below V_S . As shown in Figure 3, this capability allows deployment in both high-side sensing and low-side sensing.

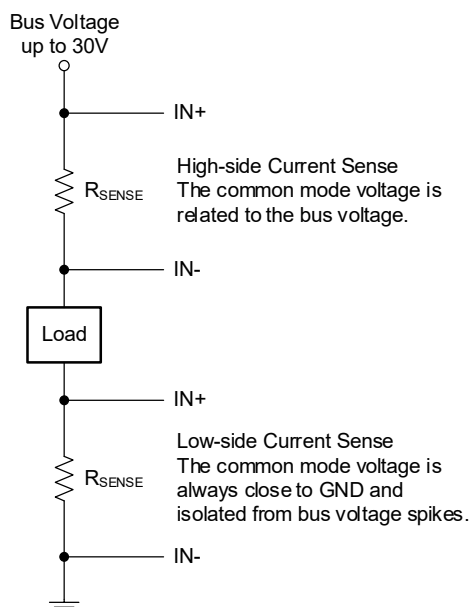


Figure 3. The Typical Connections of High-side and Low-side Mode

Precise Low-side Current Sensing

The SGM8192-1 maintains $\pm 110\mu V$ input offset voltage in low-side current sensing. This low-offset characteristic enables two key advantages: precise current measurement across wide dynamic ranges (especially at low-current extremes) and accurate sensing of minimal voltage drops across sense resistors. Lower-value shunt resistors can thus be implemented, reducing power loss and improving end-application efficiency.

Rail-to-Rail Output Swing

The SGM8192-1 supports linear current sensing. Its output is proximity to both supply rail (15mV TYP swing) and GND (1mV TYP swing). For output swing comparison between the SGM8192-1 and standard operational amplifier (op amp), inputs are intentionally overdriven to emulate open-loop conditions in op amp datasheet specifications. The closed-loop architecture constrains the GND-side output swing by the product of input offset voltage and gain.

For devices with positive input offset voltages, the output swing to GND is constrained by the greater of two values: the product of input offset voltage and amplifier gain, or the GND swing limit specified in the ELECTRICAL CHARACTERISTICS table.

Example Application (SGM8192-1xA2, Gain = 50V/V): Assuming a typical input offset voltage of $60\mu V$, low-side current sensing yields 3mV output ($60\mu V \times 50V/V$), exceeding the specified negative swing limit. Thus, the GND swing is limited to 3mV. The calculated output at zero differential signal is -3mV ($-60\mu V \times 50V/V$). Here, the negative offset inherently assists in driving the output toward the rail, aligning the GND swing with the ELECTRICAL CHARACTERISTICS table specification.

DETAILED DESCRIPTION (continued)

Input offset voltage relates to common mode voltage based on the CMRR specification. When working at higher common mode voltage, the increase of input offset voltage limits the lower limit of output voltage under zero-current condition. Figure 4 shows the SGM8192-1xA2 typical zero-current output voltage versus common mode voltage.

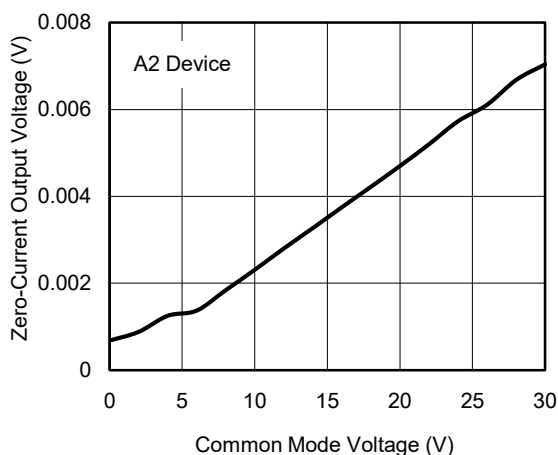


Figure 4. SGM8192-1xA2 Zero-Current Output Voltage vs. Common Mode Voltage

Functional Modes

Normal Operating Mode

The SGM8192-1 operates normally when the following criteria are satisfied:

- V_S (Power Supply): 2.7V to 5.5V
- V_{CM} (Common Mode Voltage): -0.2V to +30V
- Input Signal Constraints:
 - Maximum: Differential input $\times$ Gain $<$ (V_S - Output swing to V_S)
 - Minimum: Differential input $\times$ Gain $>$ Swing to GND (refer to Rail-to-Rail Output Swing section)

In normal operation, the output voltage linearly scales with the differential voltage between $IN+$ and $IN-$, amplified by the device's fixed gain.

Input Differential Overload

Overload Behavior: When $(V_{IN+} - V_{IN-}) \times \text{Gain}$ exceeds the output swing limits, the SGM8192-1 saturates its output near V_S , invalidating measurement accuracy.

Mitigation Strategies:

- Reduce the shunt resistor value to lower differential input voltage.
- Select a lower-gain variant of the SGM8192-1 with the existing shunt resistor.

When the amplified differential input voltage $(V_{IN+} - V_{IN-}) \times \text{Gain}$ exceeds the defined output swing range, the SGM8192-1 enters saturation near the positive supply rail, rendering accurate measurement infeasible. To prevent such operational saturation during standard use, designers may either reduce the shunt resistor value to lower the generated input voltage or opt for a lower-gain device variant while retaining the existing sense resistor configuration. In scenarios where transient overloads arise from fault conditions, the amplifier's output autonomously recovers to its linear operational range following fault elimination, ensuring rapid system restoration without manual intervention.

The SGM8192-1 safeguards operational integrity when its output approaches the positive supply rail or ground reference. Incremental increases in differential input voltage do not compromise device reliability provided all absolute maximum ratings are strictly observed. Through adherence to these operational constraints, the amplifier preserves signal polarity without inducing phase reversal anomalies.

Shutting Down SGM8192-1

There is no shutdown control at the internal of SGM8192-1, so the only way to shut down the quiescent current from the power supply is by using an external logic gate or transistor switch.

However, the users may concern about the amount of current through SGM8192-1 in shutdown mode. The schematic in Figure 5 can be used to evaluate the amount of current drain in shutdown mode.


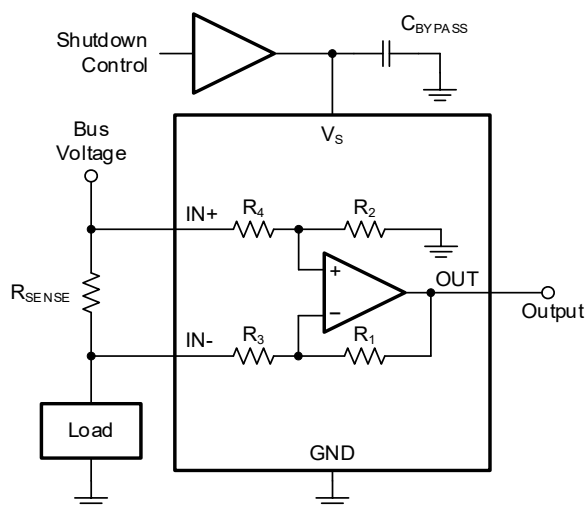


Figure 5. Shutting Down the Current Shunt Monitor

APPLICATION INFORMATION

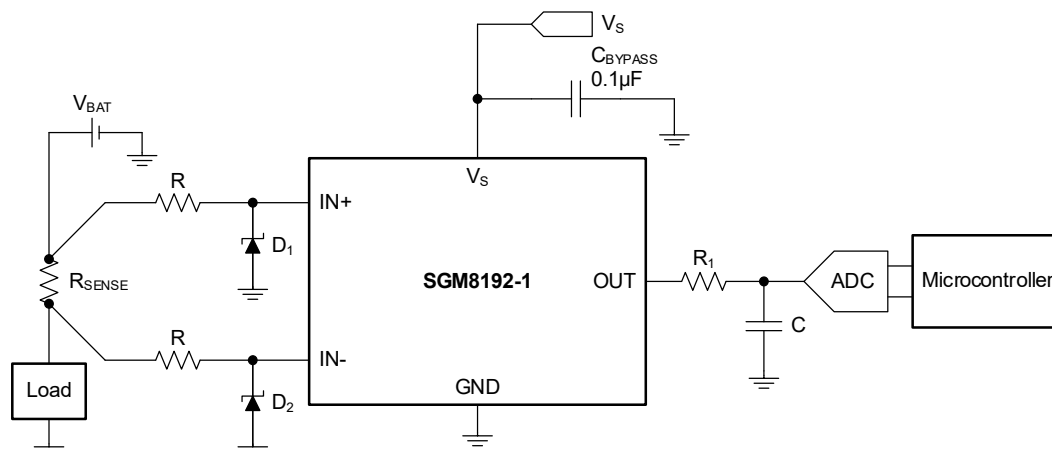

NOTE: To optimize measurement accuracy Establish a direct path with minimal impedance between the SGM8192-1 GND pin and the ground reference of the analog-to-digital converter (ADC) or microcontroller.

Figure 6. Typical Application Circuit for Battery-Powered System

The SGM8192-1 current-sense amplifier accurately scales up the voltage generated across a current-sensing shunt resistor during load or ground-referenced current flow.

Recommended Connection

The recommended connection of SGM8192-1 is shown in Figure 6. Also, it is recommended that the shunt resistor should be placed as close as possible to the two input pins of the current shunt monitor, so the extra resistance which is series with the measured shunt resistor will be reduced.

The bypass capacitor is necessary for the current shunt monitor to improve its stability. In most applications, the power supply is noisy and it will affect the operation of SGM8192-1, so the bypass capacitor is needed in this case.

Power Supply

The SGM8192-1 can accurately measure the current when the common mode voltage exceeds the power supply voltage presented at the V_S pin. For example, the V_S power supply can be 5V and the load or common mode power supply voltage is allowed to reach up to 30V. The output voltage range is limited by the level of the power supply.

Selection of R_{SENSE}

For the typical range of the differential input, the current shunt monitor of SGM8192-1 can work accurately with the order of 10mV. The application of SGM8192-1 will determine the selection of the shunt resistor R_{SENSE} . Also, the users should consider the trade-off between voltage loss and the accuracy of small input signals. The effect

of offset can be minimized by using high values of R_{SENSE} , while the voltage loss can be minimized by using low values of R_{SENSE} . For most applications, a voltage drop of 60mV over R_{SENSE} is the appropriate range for the selection of R_{SENSE} , particularly when the supply voltage V_S is 5V, as it helps maintain the output signal within a linear range centered near the mid-scale. Under this condition, the corresponding input offset voltage is a maximum of 200μV.

Input Filtering

It is not recommended to add a filter at the output of SGM8192-1 if its output is connected to a low impedance input. Filtering at the input pins will be a good choice as long as the change of the input impedance is taken in account. Figure 7 indicates the application of input filtering.

For minimizing the error and enhancing the accuracy of the result, the resistance of the external resistor R_F should be less than 10Ω. At the internal input structure of SGM8192-1, there is a bias network which causes mismatch in the bias current of two input pins, and the external resistors result in the mismatch of voltage drops (because of the mismatch of I_B) across R_F so that the differential error will be created. Also, this differential error will be reflected to the input pins of the current shunt monitor and result in the accuracy. However, the bias current difference can result in little effect on the operation of the current shunt monitor so the users do not need to care about that.

APPLICATION INFORMATION (continued)

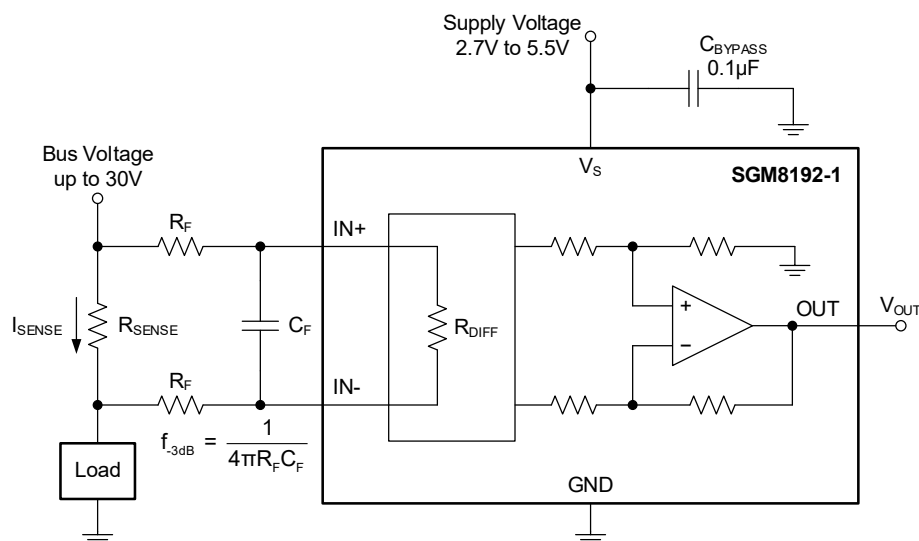
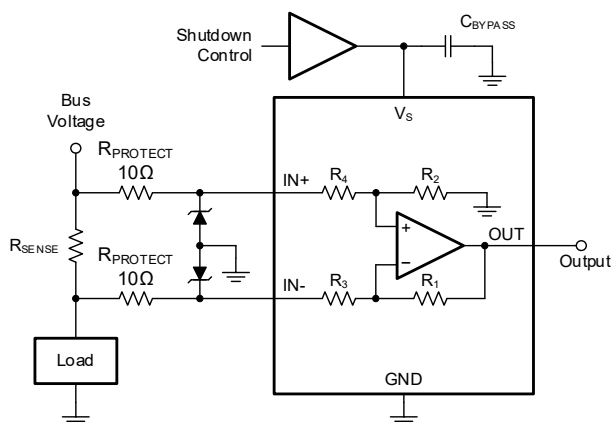



Figure 7. Filtering at Input

**The Performance of SGM8192-1 when
Common Mode Transients above 30V**

The SGM8192-1 can be powered by the power supply whose power-on transient is higher than 30V, especially for the application of automotive industry. At this case, a Zener diode or Zener-type transient absorber (Transzorbs) can be used to prevent the current shunt monitor from over-voltage during the transient of power-on. It does not recommend users to use the transient absorber other than Transzorbs because of the significant time delay. However, any Zener diode needs extra operational resistors to provide the operating current, so the 10Ω resistors are selected (any large external resistor will affect the gain). Also, 10Ω resistors and a Zener diode with lowest rating of power are enough for handling the short-term transient in most applications.

Figure 8. Using Dual Diodes for Absorbing Supply
Transient

If the low power Zener diode cannot protect the current shunt monitor from supply transient, a Transzorb with high power must be taken into account in this case. In Figure 9, for saving the space of PCB board, a Transzorb and back-to-back diode can also be used to absorb the transient. For the applications of Figure 8 and Figure 9.

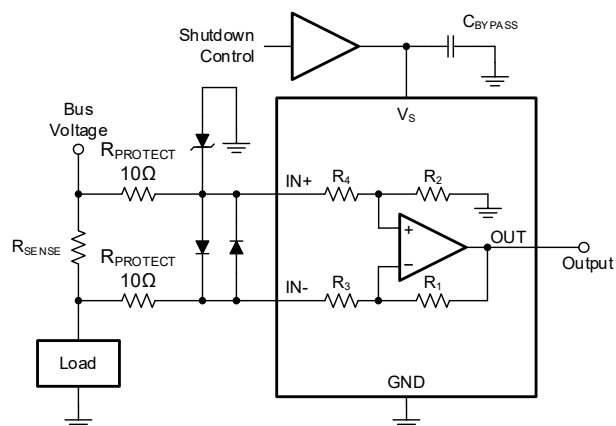Figure 9. Using Transzorb and Input Clamps for
Absorbing Supply Transient



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



Changes from Original (JULY 2026) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

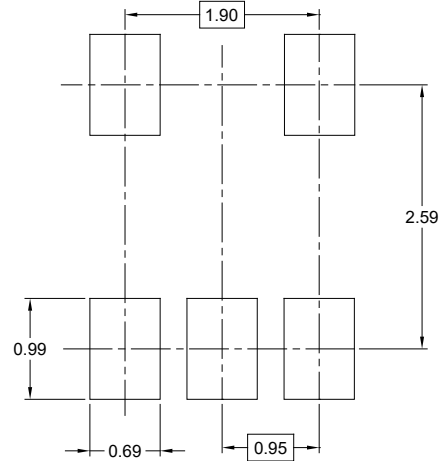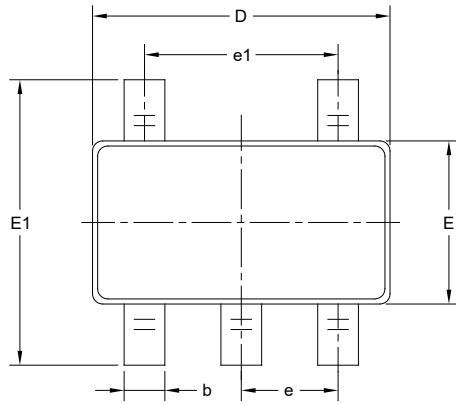

RECOMMENDED LAND PATTERN (Unit: mm)

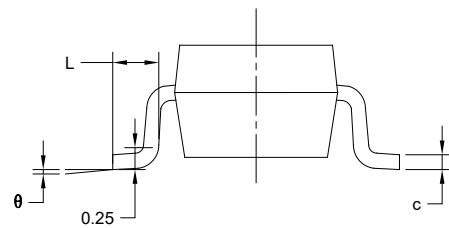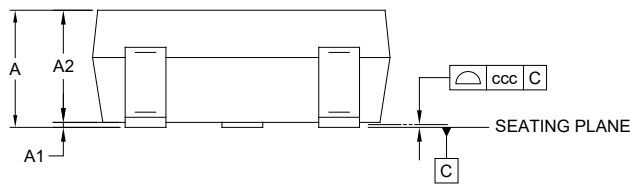

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		


NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

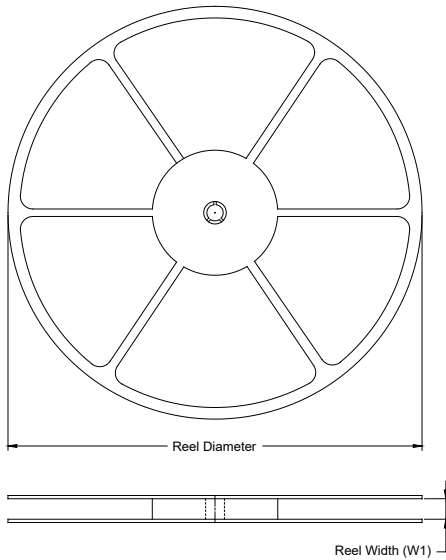

TAPE DIMENSIONS

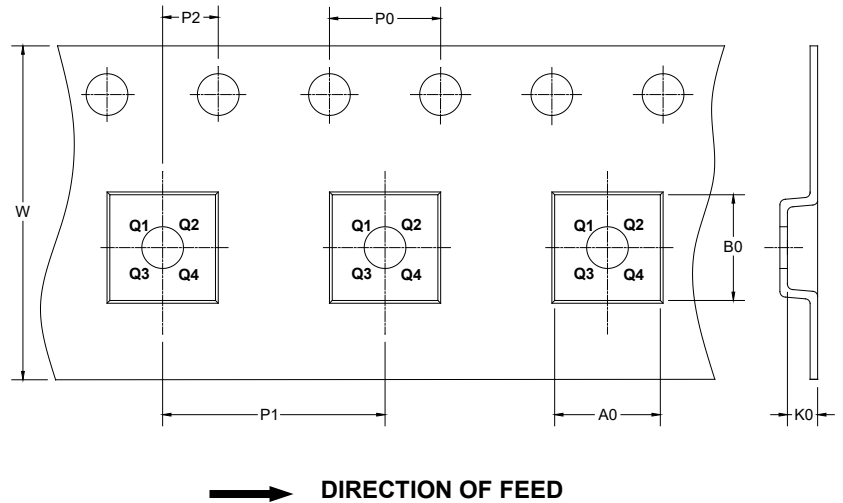

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

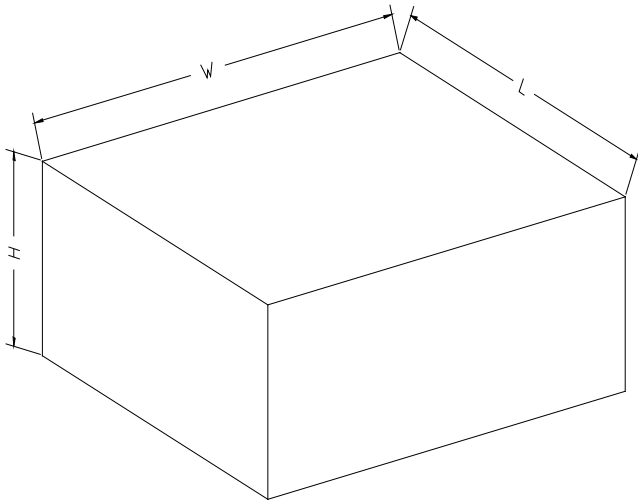

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DP0002