SGMNM07330
30V, Power, Single N-Channel, PDFN Package, MOSFET

FEATURES

- **High Power and Current Handing Capability**
- **Low On-State Resistance**
- **Low Q_G and Capacitance Losses**
- **RoHS Compliant and Halogen-Free**

APPLICATIONS

PWM Applications
Power Load Switch
Battery Management
Wireless Chargers

PRODUCT SUMMARY

R_{DSON} (TYP) V_{GS} = 10V	R_{DSON} (MAX) V_{GS} = 10V	I_D (MAX) T_C = +25℃
5mΩ	6.8mΩ	48A

PIN CONFIGURATION

(TOP VIEW)

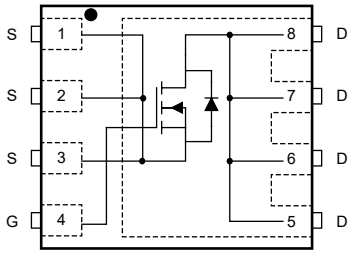

PDFN-3.3×3.3-8AL

EQUIVALENT CIRCUIT

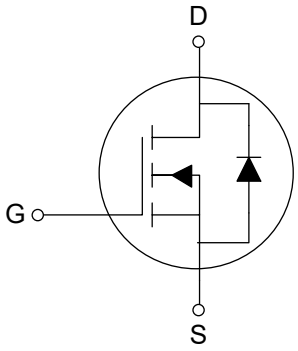

ABSOLUTE MAXIMUM RATINGS

PARAMETER		SYMBOL	VALUE	UNITS
Drain-to-Source Voltage		V_{DS}	30	V
Gate-to-Source Voltage		V_{GS}	±20	V
Drain Current (1)	T_C = +25℃	I_D	48	A
	T_C = +100℃		30	
	T_A = +25℃		14	
	T_A = +70℃		11	
Drain Current (Pulse) (2)		I_{DM}	100	A
Total Dissipation	T_C = +25℃	P_D	27	W
	T_C = +100℃		10	
	T_A = +25℃		2.2	
	T_A = +70℃		1.4	
Avalanche Current (3)		I_{AS}	36	A
Avalanche Energy (3)		E_{AS}	64.8	mJ
Junction Temperature		T_J	150	℃
Storage Temperature Range		T_{STG}	-55 to +150	℃
Lead Temperature (Soldering, 10s)			+260	℃

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

NOTES:
1. The current will be limited by Package, PCB, thermal design and operating temperature.
2. t_{PLUSE} < 10μs.
3. Parts are 100% tested at V_{GS} = 10V, I_L =25.5A, E_{AS} = 32.5mJ.

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGMNM07330	PDFN-3.3×3.3-8AL	-55℃ to +150℃	SGMNM07330TPDB8G/TR	SGM05T TPDB8 XXXXX	Tape and Reel, 5000

MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

THERMAL RESISTANCE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNITS
Junction to Case Thermal Resistance	$R_{\theta JC}$	4.6	℃/W
Junction to Ambient Thermal Resistance (1)	$R_{\theta JA}$	56	℃/W

NOTE: 1. $R_{\theta JA}$ is determined with the device mounted on one square inch of copper pad, 2oz copper on FR4 board.

ELECTRICAL CHARACTERISTICS

(T_A = +25℃, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Static Off Characteristics							
Drain-to-Source Breakdown Voltage	V_{BR_DSS}	V_{GS} = 0V, I_D = 250μA		30			V
Zero Gate Voltage Drain Current	I_{DSS}	V_{GS} = 0V, V_{DS} = 24V				1	μA
Gate-to-Source Leakage Current	I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V				±100	nA
Static On Characteristics							
Gate-to-Source Threshold Voltage	V_{GS_TH}	V_{GS} = V_{DS}, I_D = 250μA		1	1.5	2	V
Drain-to-Source On-State Resistance	R_{DSON}	I_D = 12A	V_{GS} = 10V		5	6.8	mΩ
			V_{GS} = 4.5V		7	9.5	
Forward Transconductance	g_{FS}	V_{DS} = 5V, I_D = 12A			18		S
Gate Resistance	R_G	V_{GS} = 0V, V_{DS} = 0V, f = 1MHz			1		Ω
Diode Characteristics							
Diode Forward Voltage	V_{F_SD}	V_{GS} = 0V, I_S = 1A			0.7	1.2	V
Reverse Recovery Time	t_{RR}	V_{GS} = 0V, I_S = 12A, di/dt = 100A/μs			9.1		ns
Reverse Recovery Charge	Q_{RR}				1.9		nC
Dynamic Characteristics							
Input Capacitance	C_{ISS}	V_{GS} = 0V, V_{DS} = 15V, f = 1MHz			1545		pF
Output Capacitance	C_{OSS}				183		
Reverse Transfer Capacitance	C_{RSS}				164		
Total Gate Charge	Q_g	V_{DS} = 15V, I_D = 12A	V_{GS} = 10V		33.1		nC
			V_{GS} = 4.5V		16.2		
Gate-to-Source Charge	Q_{GS}	V_{GS} = 4.5V, V_{DS} = 15V, I_D = 12A			5		
Gate-to-Drain Charge	Q_{GD}				6.7		
Switch Characteristics							
Turn-On Delay Time	t_{D_ON}	V_{GS} = 10V, V_{DS} = 15V, I_D = 12A, R_G = 3Ω			5.5		ns
Rise Time	t_R				29.8		
Turn-Off Delay Time	t_{D_OFF}				24.1		
Fall Time	t_F				10.4		

TYPICAL PERFORMANCE CHARACTERISTICS

Output Characteristics

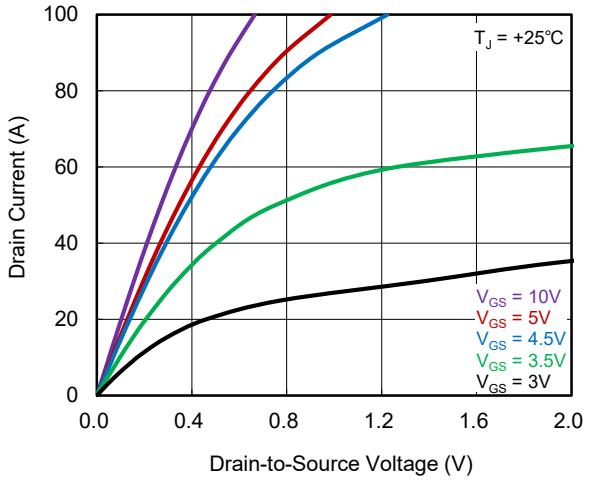

Drain-to-Source On-State Resistance vs. Drain Current

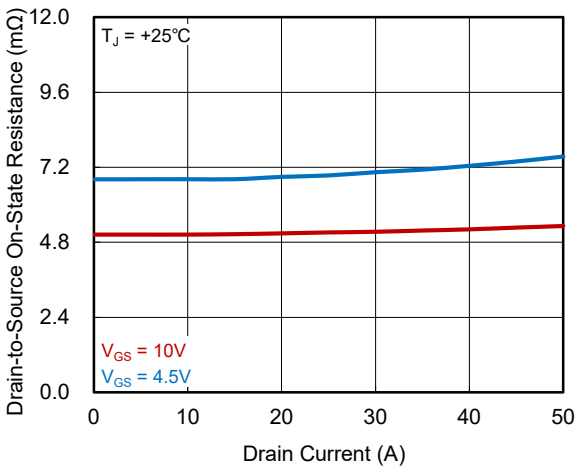

Drain-to-Source On-State Resistance vs. Gate-to-Source Voltage

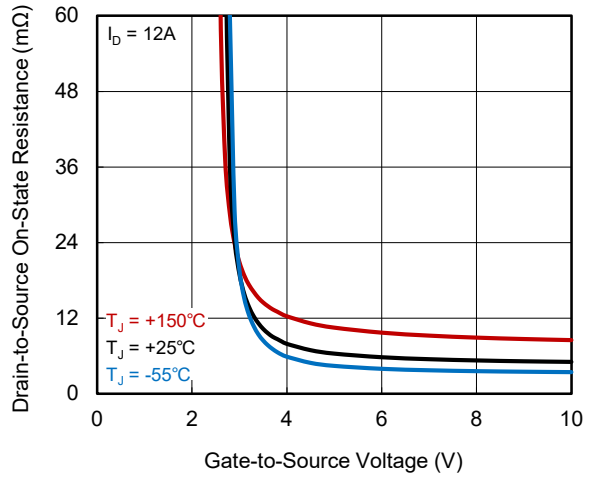

Diode Forward

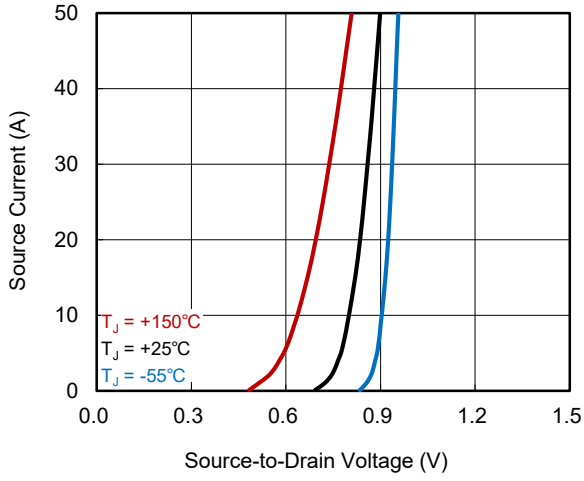

Gate Charge Characteristics

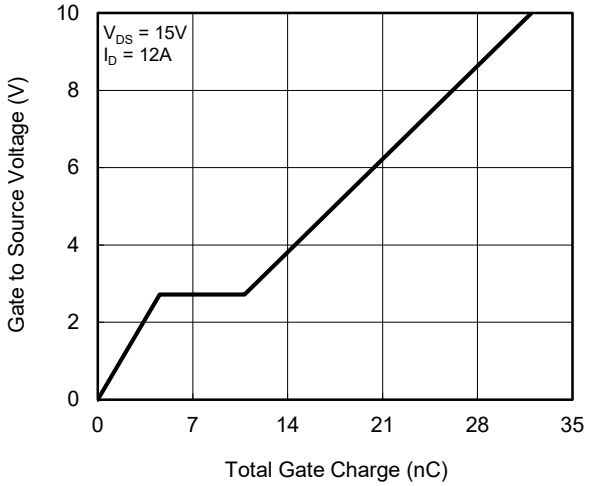

Capacitance Characteristics

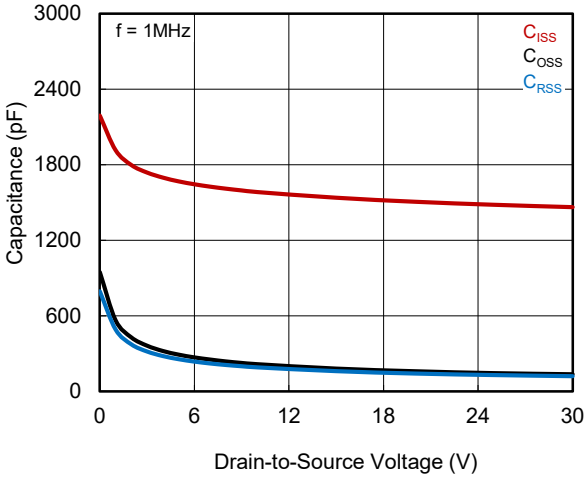

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Normalized Threshold Voltage vs. Junction Temperature

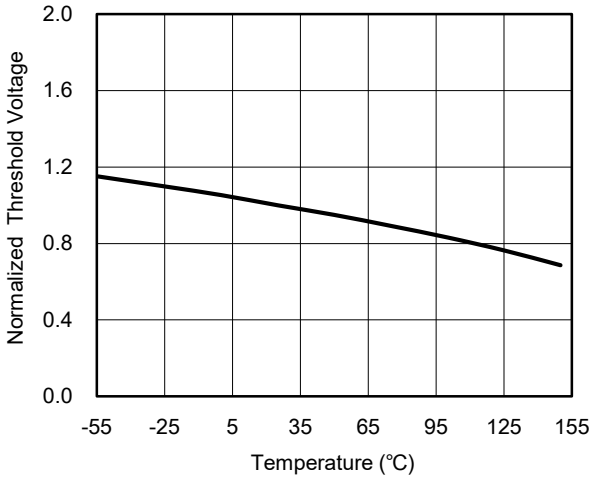

Normalized On-Resistance vs. Junction Temperature

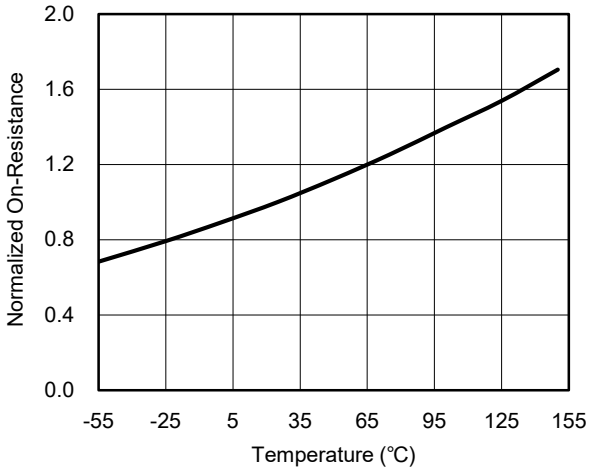

Transfer Characteristics

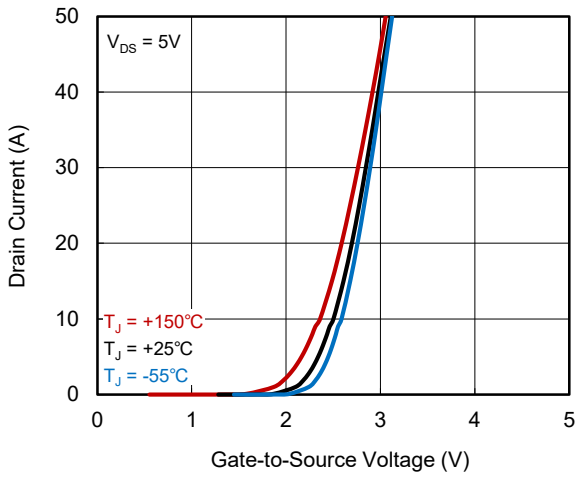

Safe Operating Area

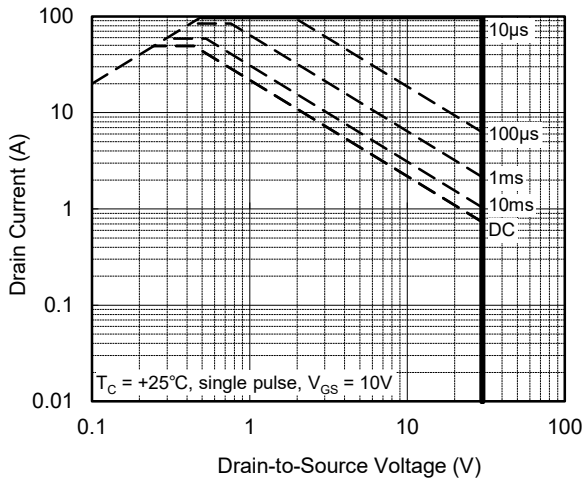

Drain Current vs. Junction Temperature

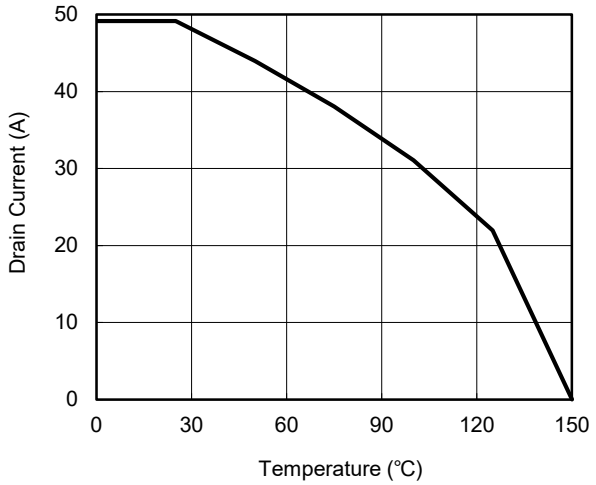

Power Dissipation vs. Junction Temperature

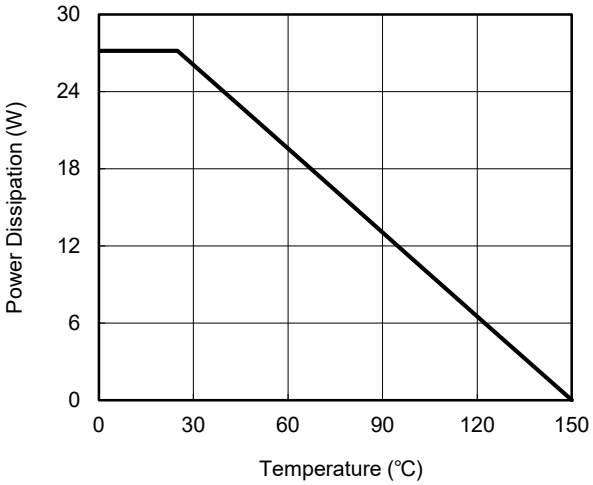

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

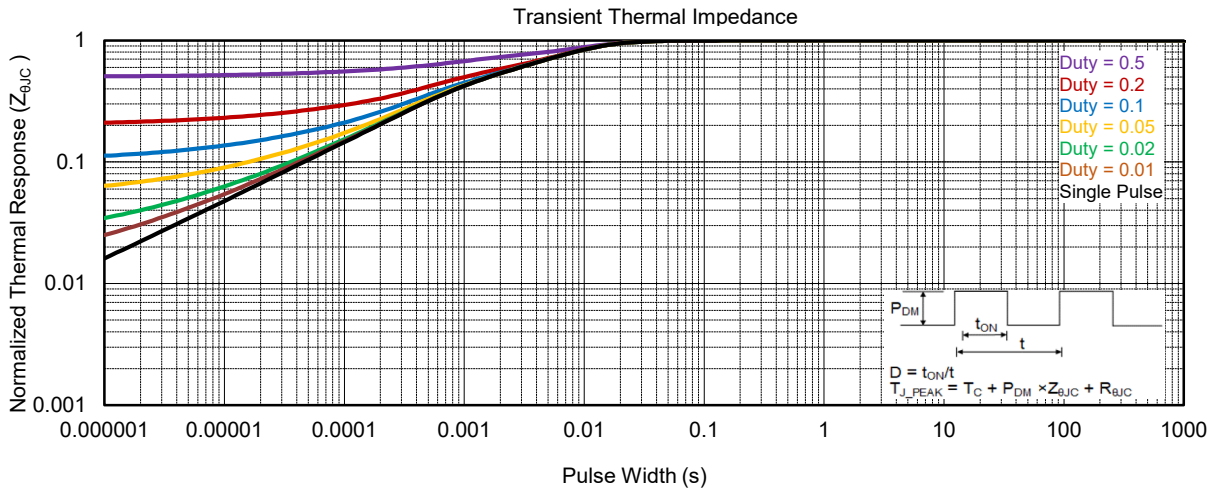

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original to REV.A (JULY 2025)	Page
Changed from product preview to production data	All

PACKAGE OUTLINE DIMENSIONS

PDFN-3.3×3.3-8AL

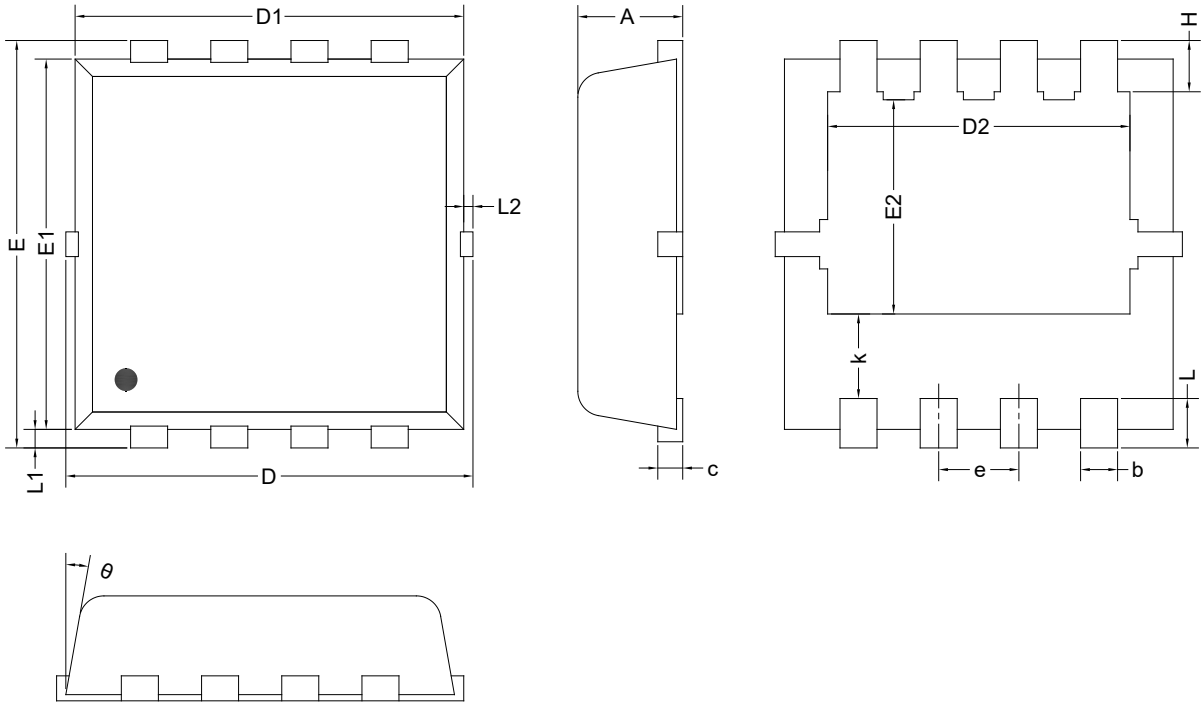

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.700	0.800	0.900
b	0.250	0.300	0.350
c	0.140	0.150	0.200
D	3.100	3.300	3.500
D1	3.050	3.150	3.250
D2	2.350	2.450	2.550
E	3.100	3.300	3.500
E1	2.900	3.000	3.100
E2	1.640	1.740	1.840
e	0.650 BSC		
H	0.320	0.420	0.520
k	0.590	0.690	0.790
L	0.250	0.400	0.550
L1	0.100	0.150	0.200
L2	-	-	0.150
θ	8°	10°	12°

NOTE: This drawing is subject to change without notice.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

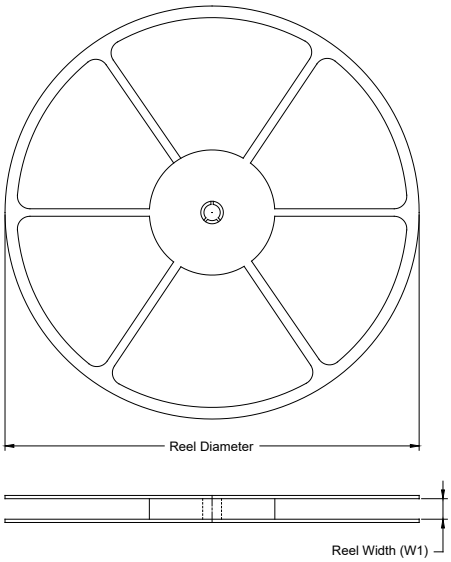

TAPE DIMENSIONS

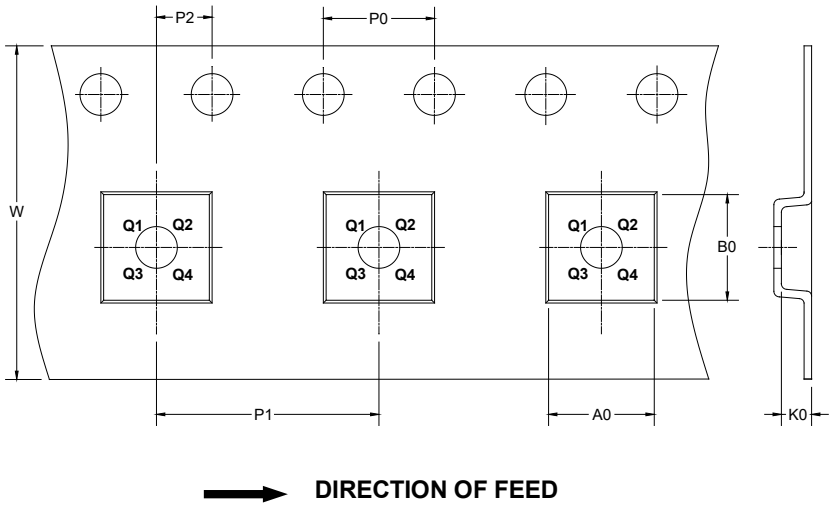

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
PDFN-3.3×3.3-8AL	13"	12.4	3.60	3.60	1.10	4.0	8.0	2.0	12.0	Q1

DD0001

CARTON BOX DIMENSIONS

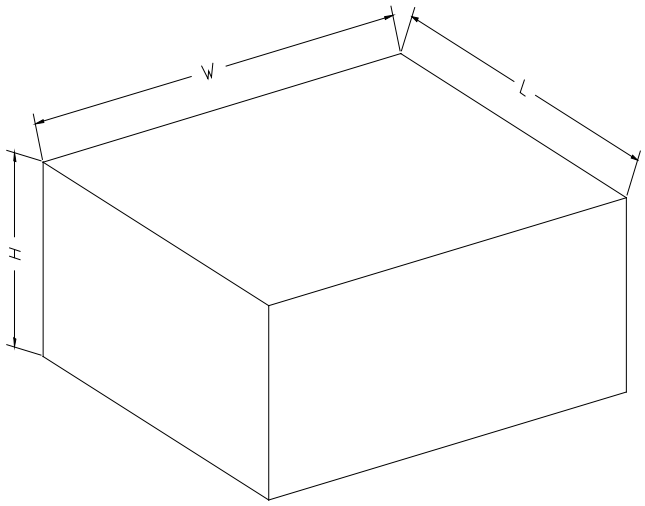

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13″	386	280	370	5

DD0002