



SGM2085LxQ

Automotive 300mA, Low Noise, High PSRR, Low I_Q and Low Dropout Regulator

GENERAL DESCRIPTION

The SGM2085LxQ is a low noise, high PSRR and low dropout voltage linear regulator. It capable of supplying 300mA output current with typical dropout voltage of only 155mV (XTDFN-1×1-4L package). The operating input voltage range is from 1.9V to 5.5V and output voltage range is from 1.2V to 5.0V.

Other features include 1.2V logic-controlled shutdown mode, under-voltage lockout, current limit and thermal shutdown protection. The SGM2085LxQ has automatic discharge function to quickly discharge V_{OUT} in the disabled status.

This device is AEC-Q100 qualified (Automotive Electronics Council (AEC) standard Q100 Grade 1) and it is suitable for automotive applications.

The SGM2085LxQ is available in Green XTDFN-1×1-4L and SOT-23-5 packages. It operates over an operating temperature range of -40°C to $+125^{\circ}\text{C}$.


APPLICATIONS

General Purpose Automotive & Industrial
Automotive Camera Modules
Automotive ADAS, Infotainment and Body


FEATURES

- AEC-Q100 Qualified for Automotive Applications
Device Temperature Grade 1
 $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
- Operating Input Voltage Range: 1.9V to 5.5V
- Enable Pin Accept Voltages Higher than the Supply Voltage and up to 5.5V
- Fixed Output from 1.2V to 4.2V
- Adjustable Output from 0.8V to 5.0V
- 300mA Output Current
- Output Voltage Accuracy: $\pm 1\%$ at $+25^{\circ}\text{C}$
- Low Quiescent Current: 30 μA (TYP)
- Low Dropout Voltage:
 - ♦ 155mV (TYP) at 300mA (XTDFN-1×1-4L)
 - ♦ 195mV (TYP) at 300mA (SOT-23-5)
- Power Supply Rejection Ratio:
 - ♦ SGM2085L-1.8Q: 71dB (TYP) at 1kHz, 64dB (TYP) at 1MHz
 - ♦ SGM2085L-ADJQ: 71dB (TYP) at 1kHz, 40dB (TYP) at 1MHz
- Current Limiting and Thermal Protection
- Low Start-Up Current
- UVLO with Hysteresis
- Supports 1.2V Logic Enable Input for ON/OFF Control
- With Output Automatic Discharge
- Stable with Small Case Size Ceramic Capacitors
- -40°C to $+125^{\circ}\text{C}$ Operating Temperature Range
- Available in Green XTDFN-1×1-4L and SOT-23-5 Packages

TYPICAL APPLICATION

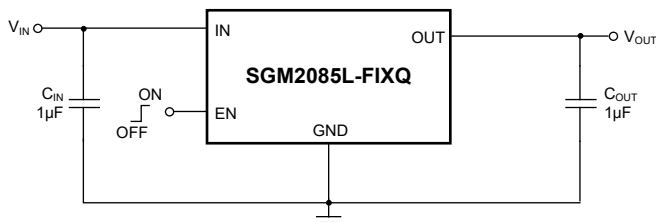

Fixed Voltage Typical Application Circuit

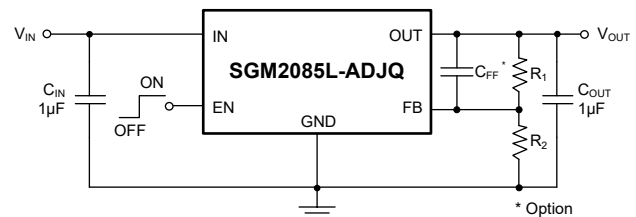

Adjustable Voltage Typical Application Circuit

Figure 1. Typical Application Circuits

Automotive 300mA, Low Noise, SGM2085LxQ High PSRR, Low I_Q and Low Dropout Regulator

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2085L-1.2Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-1.2QXDH4G/TR	6F XXX	Tape and Reel, 5000
SGM2085L-1.5Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-1.5QXDH4G/TR	7B XXX	Tape and Reel, 5000
SGM2085L-1.8Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-1.8QXDH4G/TR	6G XXX	Tape and Reel, 5000
SGM2085L-2.5Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-2.5QXDH4G/TR	7C XXX	Tape and Reel, 5000
SGM2085L-2.8Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-2.8QXDH4G/TR	6H XXX	Tape and Reel, 5000
SGM2085L-2.9Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-2.9QXDH4G/TR	7D XXX	Tape and Reel, 5000
SGM2085L-3.0Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-3.0QXDH4G/TR	6I XXX	Tape and Reel, 5000
SGM2085L-3.3Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-3.3QXDH4G/TR	6J XXX	Tape and Reel, 5000
SGM2085L-4.2Q	XTDFN-1×1-4L	-40°C to +125°C (T _A)	SGM2085L-4.2QXDH4G/TR	7E XXX	Tape and Reel, 5000
SGM2085L-1.2Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-1.2QN5G/TR	2SO XXXYY	Tape and Reel, 3000
SGM2085L-1.5Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-1.5QN5G/TR	2SP XXXYY	Tape and Reel, 3000
SGM2085L-1.7Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-1.7QN5G/TR	2SQ XXXYY	Tape and Reel, 3000
SGM2085L-1.8Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-1.8QN5G/TR	2EH XXXYY	Tape and Reel, 3000
SGM2085L-2.5Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-2.5QN5G/TR	2SR XXXYY	Tape and Reel, 3000
SGM2085L-2.8Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-2.8QN5G/TR	2SS XXXYY	Tape and Reel, 3000
SGM2085L-2.9Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-2.9QN5G/TR	2ST XXXYY	Tape and Reel, 3000
SGM2085L-3.0Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-3.0QN5G/TR	2SU XXXYY	Tape and Reel, 3000
SGM2085L-3.3Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-3.3QN5G/TR	2EI XXXYY	Tape and Reel, 3000
SGM2085L-4.2Q	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-4.2QN5G/TR	2SV XXXYY	Tape and Reel, 3000
SGM2085L-ADJQ	SOT-23-5	-40°C to +125°C (T _A)	SGM2085L-ADJQN5G/TR	2SW XXXYY	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXX = Date Code and Trace Code. XXXYY = Date Code, Trace Code and Lot Number.

XXX
 └── Trace Code
 └── Date Code - Year

YYY — Serial Number
XXXYY
 └── Lot Number
 └── Trace Code
 └── Date Code - Year

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

IN to GND	-0.3V to 6V
OUT to GND	-0.3V to 6V
FB to GND	-0.3V to 6V
EN to GND	-0.3V to 6V
Package Thermal Resistance	
XTDFN-1×1-4L, θ_{JA}	148.3°C/W
XTDFN-1×1-4L, θ_{JB}	85.1°C/W
XTDFN-1×1-4L, $\theta_{JC(TOP)}$	105.4°C/W
XTDFN-1×1-4L, $\theta_{JC(BOT)}$	76.7°C/W
SOT-23-5, θ_{JA}	149°C/W
SOT-23-5, θ_{JB}	28.9°C/W
SOT-23-5, θ_{JC}	66.2°C/W
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility ^{(1) (2)}	
HBM	±8000V
CDM	±1000V

NOTES:

1. For human body model (HBM), all pins comply with AEC-Q100-002 specification.
2. For charged device model (CDM), all pins comply with AEC-Q100-011 specification.

RECOMMENDED OPERATING CONDITIONS

Operating Input Voltage Range, V_{IN}	1.9V to 5.5V
Enable Voltage Range	0V to 5.5V
Input Effective Capacitance, C_{IN}	0.5μF (MIN)
Output Effective Capacitance, C_{OUT}	0.5μF to 100μF
Operating Ambient Temperature Range	-40°C to +125°C
Operating Junction Temperature Range	-40°C to +150°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.


DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


SGM2085LxQ Automotive 300mA, Low Noise, High PSRR, Low I_Q and Low Dropout Regulator

PIN CONFIGURATIONS


SGM2085L-FIXQ (TOP VIEW)

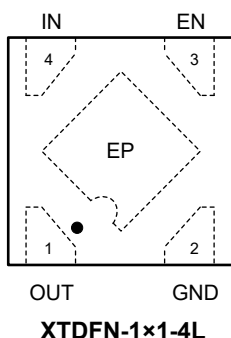

SGM2085L-FIXQ (TOP VIEW)

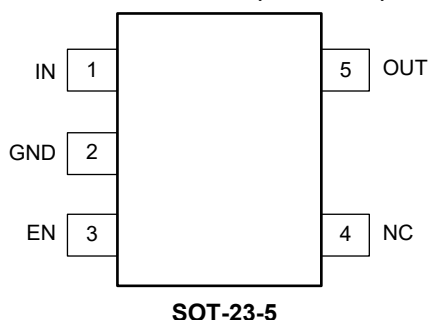

SGM2085L-ADJQ (TOP VIEW)

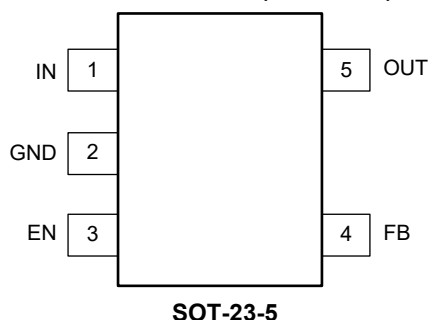

PIN DESCRIPTION

PIN		NAME	FUNCTION
XTDFN-1x1-4L	SOT-23-5		
1	5	OUT	Regulator Output Pin. It is recommended to use a 1μF ceramic capacitor to ensure stability. This ceramic capacitor should be placed as close as possible to OUT pin.
2	2	GND	Ground Pin.
3	3	EN	Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator.
4	1	IN	Input Supply Voltage Pin. It is recommended to use a 1μF or larger ceramic capacitor from IN pin to ground to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to IN pin.
—	4	FB	Feedback Voltage Input Pin (adjustable voltage version only). Connect this pin to the midpoint of an external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin.
		NC	No Connection (fixed voltage version).
Exposed Pad	—	—	Exposed Pad. Connect it to a large ground plane to maximize thermal performance. This pad is not an electrical connection point.

SGM2085LxQ Automotive 300mA, Low Noise, High PSRR, Low I_Q and Low Dropout Regulator

FUNCTIONAL BLOCK DIAGRAMS

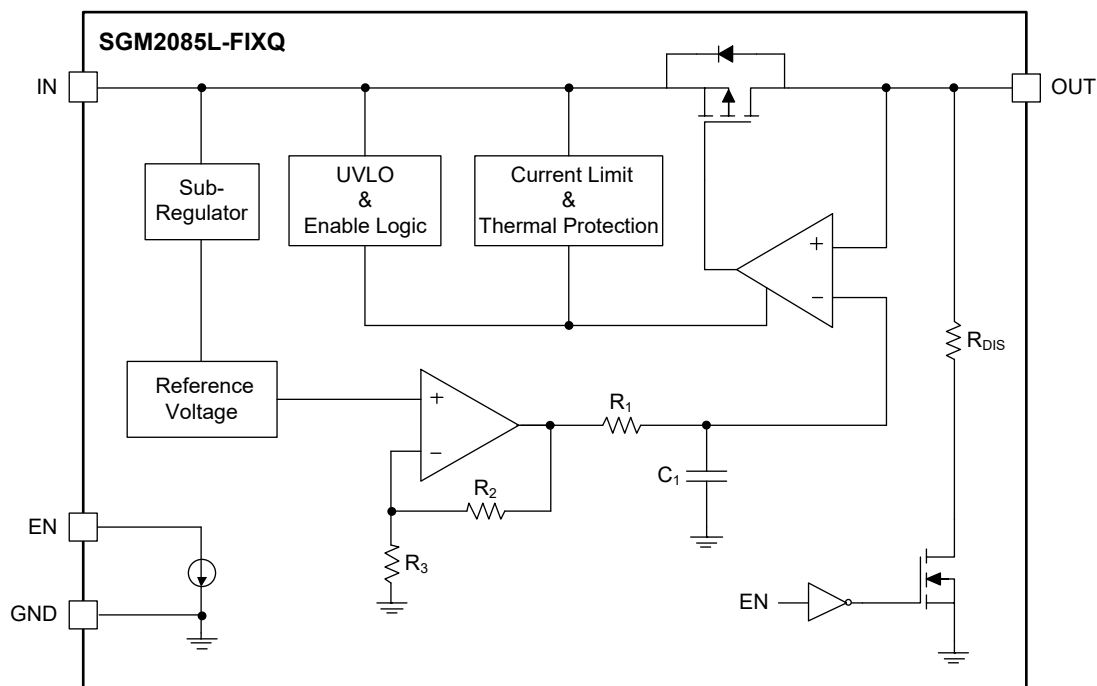


Figure 2. Fixed Output Regulator Block Diagram

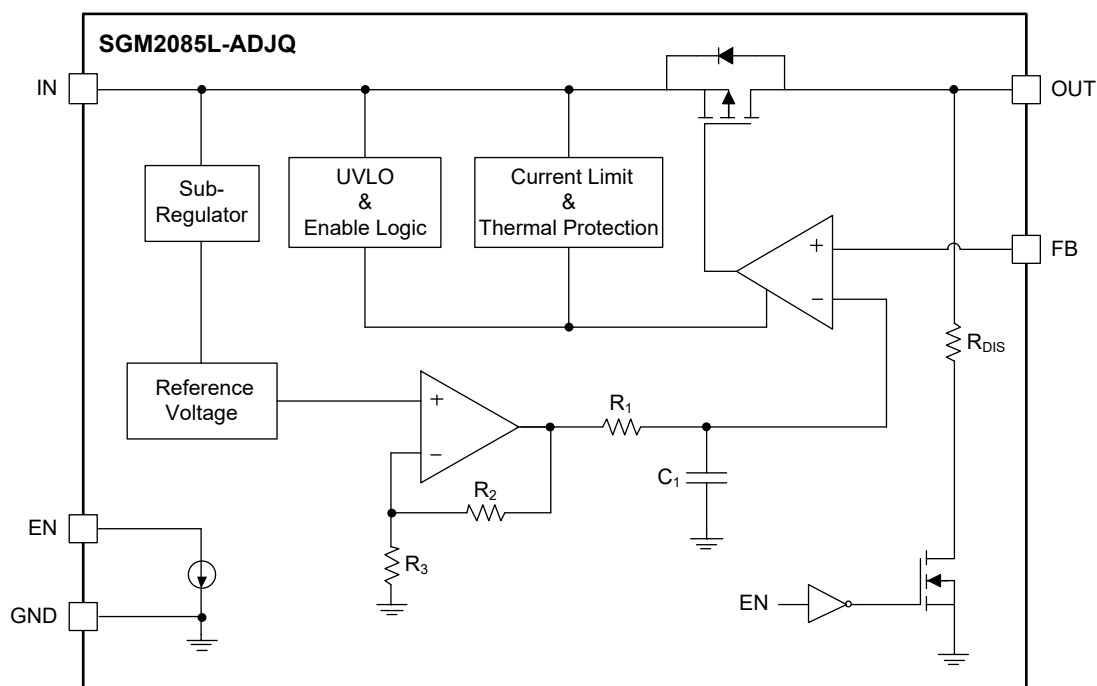


Figure 3. Adjustable Output Regulator Block Diagram

SGM2085LxQ Automotive 300mA, Low Noise, High PSRR, Low I_Q and Low Dropout Regulator

ELECTRICAL CHARACTERISTICS

(V_{IN} = (V_{OUT(NOM)} + 0.5V) or 1.9V (whichever is greater), V_{EN} = V_{IN}, I_{OUT} = 0.1mA, C_{OUT} = 1μF, T_J = -40°C to +125°C ⁽¹⁾, typical values are at T_J = +25°C, unless otherwise noted.)







PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range	V _{IN}		1.9		5.5	V
Output Voltage Range	V _{OUT}	SGM2085L-FIXQ	1.2		5.0	V
		SGM2085L-ADJQ	0.8		5.0	
Output Voltage Accuracy	V _{OUT}	V _{IN} = (V _{OUT(NOM)} + 0.5V) or 1.9V (whichever is greater) to 5.5V, I _{OUT} = 0.1mA to 300mA	T _J = +25°C	-1	+1	%
			T _J = -40°C to +125°C	-2	+1	
Feedback Voltage	V _{FB}	T _J = +25°C	0.792	0.8	0.808	V
		T _J = -40°C to +125°C	0.784	0.8	0.808	
FB Pin Leakage Current	I _{FB}	V _{FB} = 0.9V		1	100	nA
Under-Voltage Lockout	V _{UVLO}	V _{IN} rising		1.38	1.9	V
		V _{IN} falling		1.17		
Line Regulation	ΔV _{OUT_LNR}	V _{IN} = (V _{OUT(NOM)} + 0.5V) or 1.9V (whichever is greater) to 5.5V		0.1	2	mV
Load Regulation	ΔV _{OUT_LDR}	V _{IN} = (V _{OUT(NOM)} + 0.5V) or 1.9V (whichever is greater), I _{OUT} = 0.1mA to 300mA	XTDFN-1×1-4L	2.5	10	mV
			SOT-23-5	1	5	
Dropout Voltage	V _{DROP}	V _{OUT} = V _{OUT(NOM)} - 50mV, I _{OUT} = 300mA (XTDFN-1×1-4L)	V _{OUT(NOM)} = 1.2V	465	600	mV
			V _{OUT(NOM)} = 1.8V	265	400	
			V _{OUT(NOM)} = 3.3V	155	280	
		V _{OUT} = V _{OUT(NOM)} - 50mV, I _{OUT} = 300mA (SOT-23-5)	V _{OUT(NOM)} = 1.2V	485	680	mV
			V _{OUT(NOM)} = 1.8V	295	430	
			V _{OUT(NOM)} = 3.3V	195	300	
Output Current Limit	I _{LIMIT}	V _{IN} = (V _{OUT(NOM)} + 1V) or 2.2V (whichever is greater), V _{OUT} = 90% × V _{OUT(NOM)}	350	550		mA
Short-Circuit Current Limit	I _{SHORT}	V _{OUT} = 0V		300		mA
Ground Pin Current	I _{GND}	V _{IN} = 5.5V, I _{OUT} = 0mA		30	150	μA
		V _{IN} = (V _{OUT(NOM)} + 0.5V) or 1.9V (whichever is greater), I _{OUT} = 300mA		2.1		mA
Shutdown Current	I _{SHDN}	V _{EN} = 0V, V _{IN} = 5.5V		0.01	1.5	μA
EN Pin High-Level Input Voltage	V _{IH}		0.88		5.5	V
EN Pin Low-Level Input Voltage	V _{IL}		0		0.4	V
Enable Pin Current	I _{EN}	V _{IN} = 5.5V, V _{EN} = 5.5V		0.1	1.0	μA
Turn-On Time	t _{ON}	V _{IN} = 5.5V, from assertion of V _{EN} to V _{OUT} = 90% × V _{OUT(NOM)}		450		μs
Power Supply Rejection Ratio	PSRR	SGM2085L-ADJQ, V _{IN} = 1.9V, V _{OUT} = 0.8V, I _{OUT} = 10mA	f = 1kHz	71		dB
			f = 1MHz	40		
		SGM2085L-FIXQ, V _{IN} = 2.8V, V _{OUT} = 1.8V, I _{OUT} = 10mA	f = 1kHz	71		
			f = 1MHz	64		
Output Voltage Noise	e _n	f = 10Hz to 100kHz, V _{OUT} = 1.8V, I _{OUT} = 10mA		31		μV _{RMS}
Output Discharge Resistance	R _{DIS}	V _{EN} = 0V, V _{IN} = 1.9V		120		Ω
Thermal Shutdown Temperature	T _{SHDN}	T _J rising		170		°C
Thermal Shutdown Hysteresis	ΔT _{SHDN}	Hysteresis		30		°C

NOTE:

1. Tested under pulse load conditions, so T_J ≈ T_A.

TYPICAL PERFORMANCE CHARACTERISTICS







$T_J = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 1.9V (whichever is greater), $V_{EN} = V_{IN}$, $I_{OUT} = 10\text{mA}$, $C_{OUT} = 1\mu\text{F}$, typical values are at $T_J = +25^{\circ}\text{C}$, unless otherwise noted.

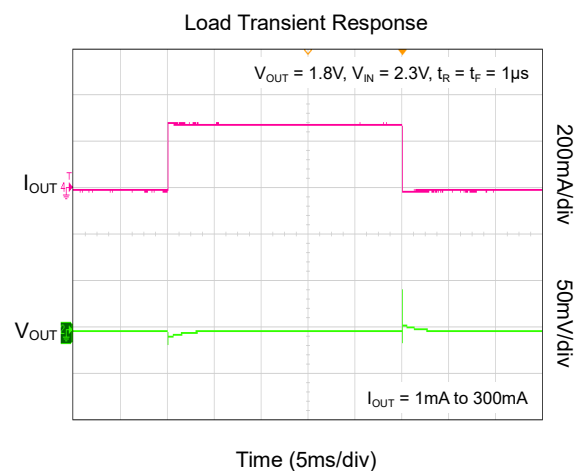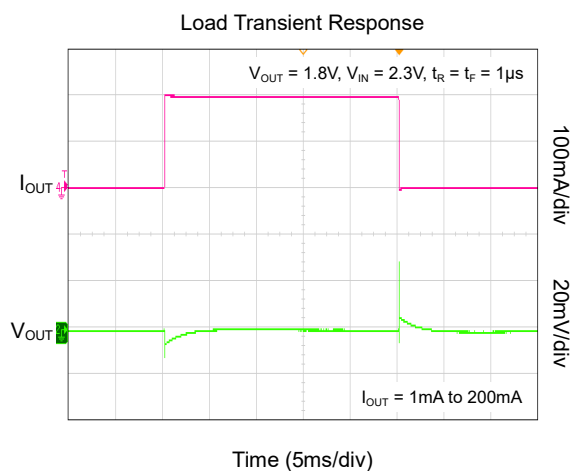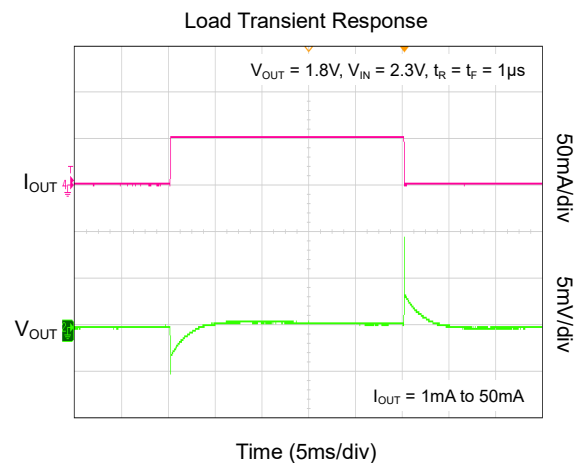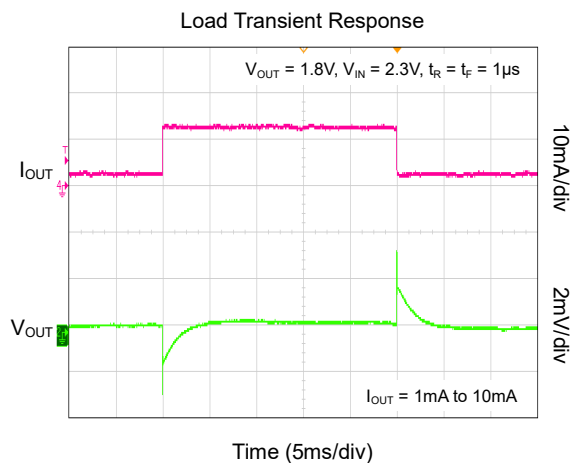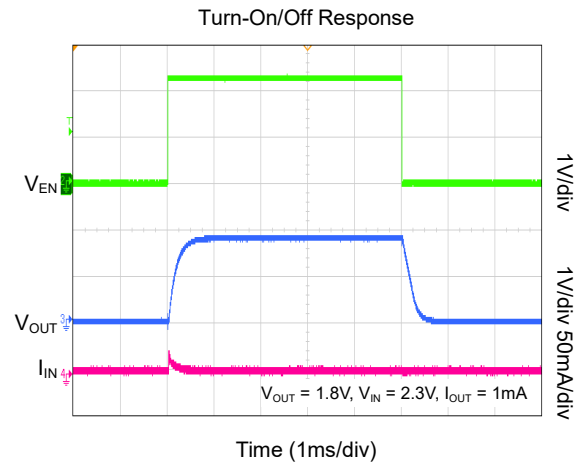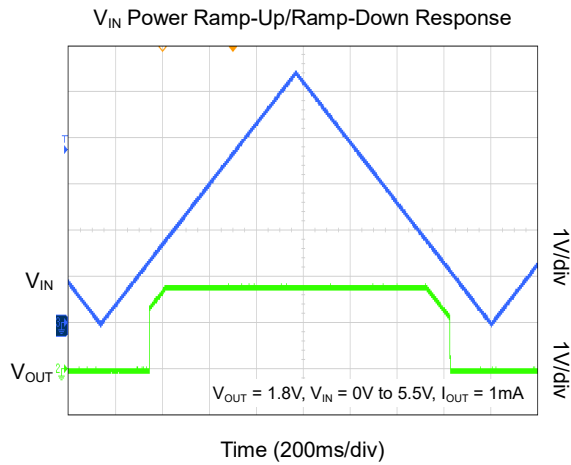

SGM2085LxQ Automotive 300mA, Low Noise, High PSRR, Low I_Q and Low Dropout Regulator

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 1.9V (whichever is greater), $V_{EN} = V_{IN}$, $I_{OUT} = 10\text{mA}$, $C_{OUT} = 1\mu\text{F}$, typical values are at $T_J = +25^\circ\text{C}$, unless otherwise noted.

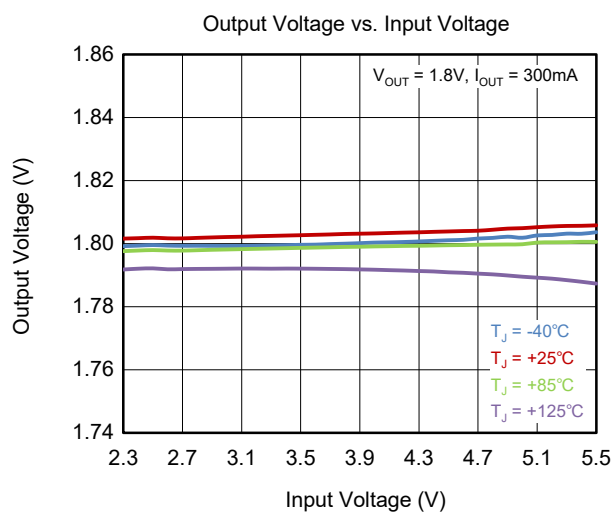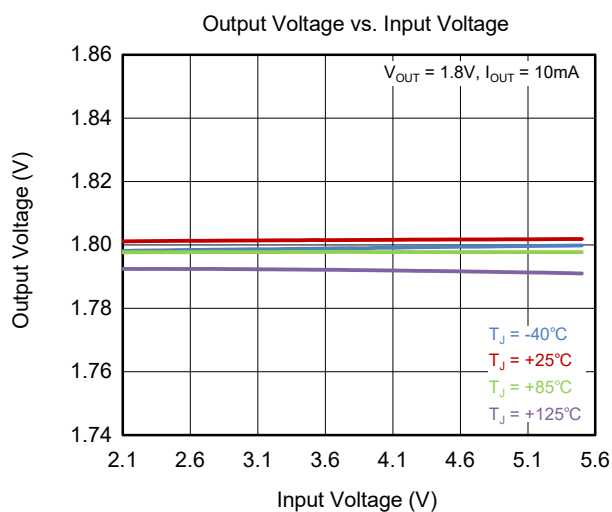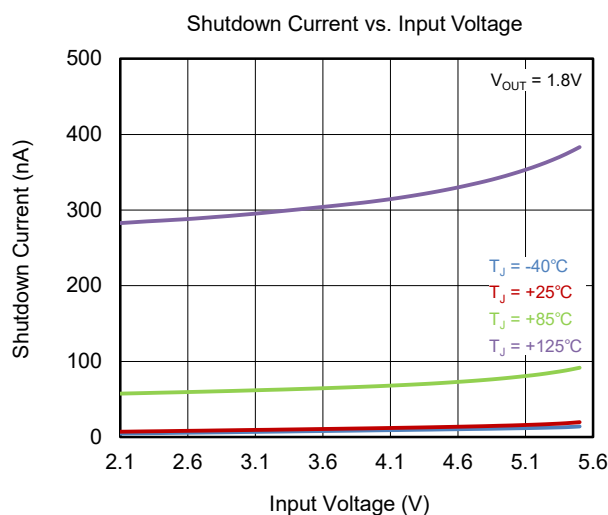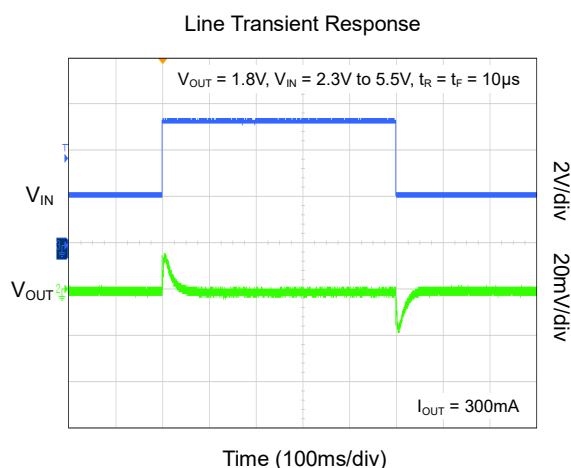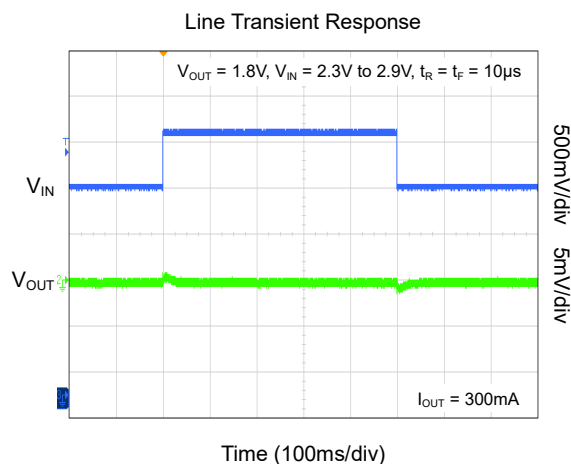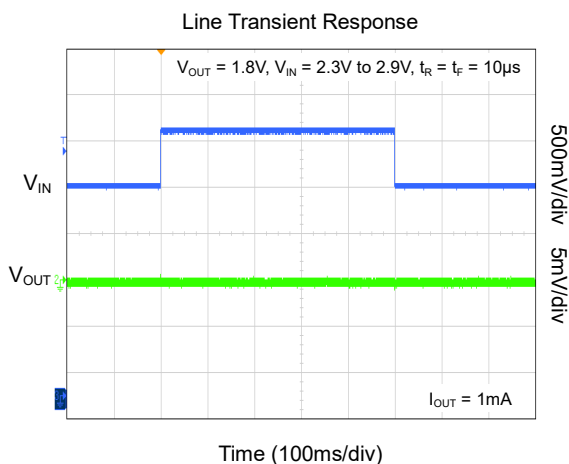

SGM2085LxQ Automotive 300mA, Low Noise, High PSRR, Low I_Q and Low Dropout Regulator

TYPICAL PERFORMANCE CHARACTERISTICS (continued)





$T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 1.9V (whichever is greater), $V_{EN} = V_{IN}$, $I_{OUT} = 10\text{mA}$, $C_{OUT} = 1\mu\text{F}$, typical values are at $T_J = +25^\circ\text{C}$, unless otherwise noted.

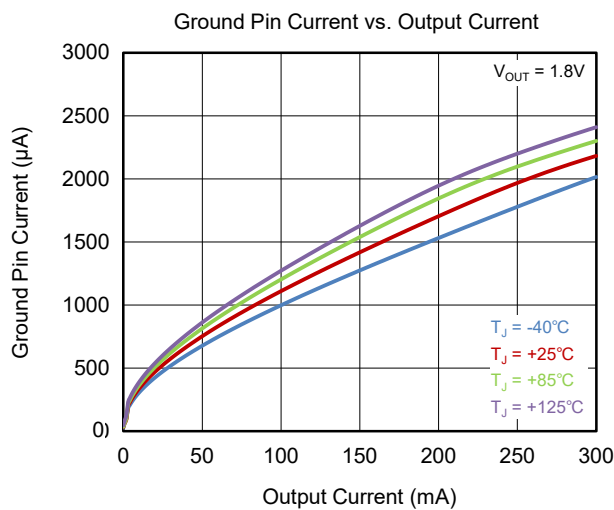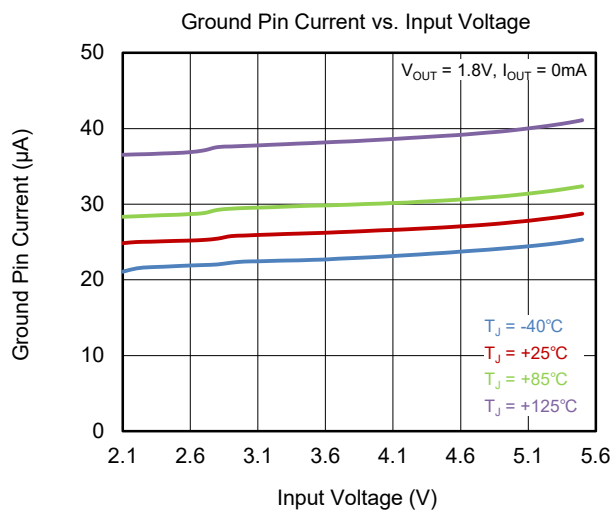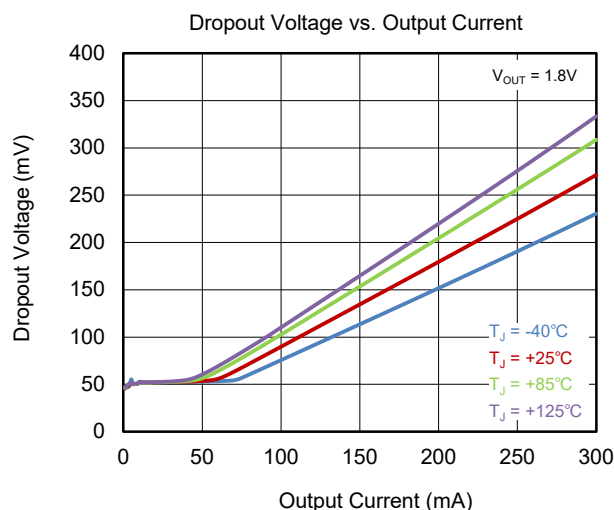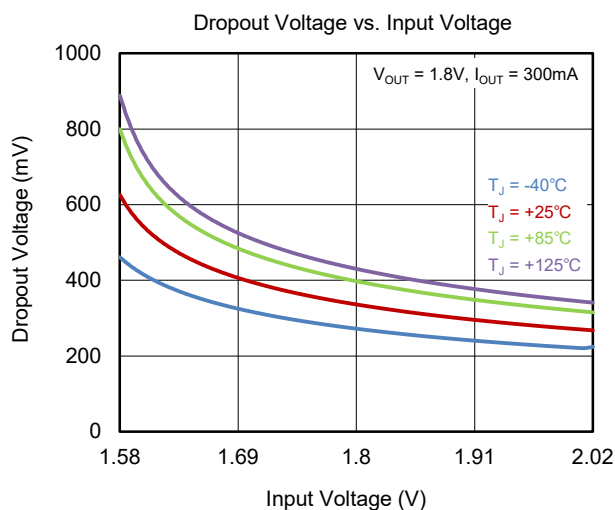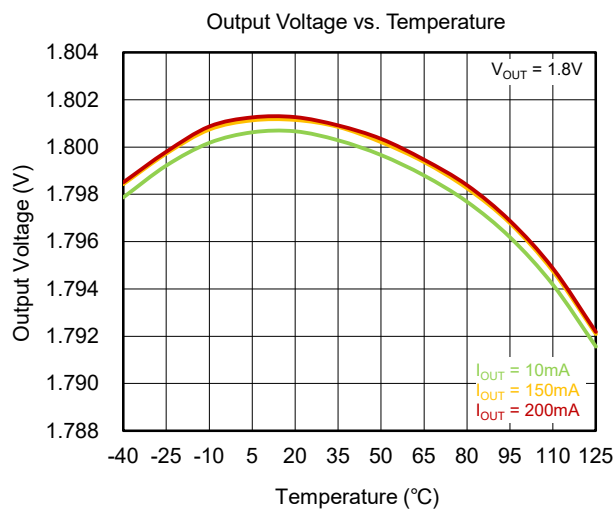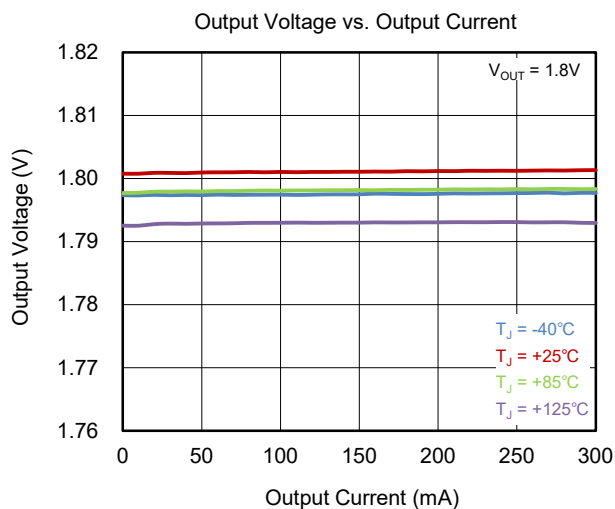

SGM2085LxQ Automotive 300mA, Low Noise, High PSRR, Low I_Q and Low Dropout Regulator

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$, $V_{IN} = (V_{OUT(NOM)} + 0.5\text{V})$ or 1.9V (whichever is greater), $V_{EN} = V_{IN}$, $I_{OUT} = 10\text{mA}$, $C_{OUT} = 1\mu\text{F}$, typical values are at $T_J = +25^\circ\text{C}$, unless otherwise noted.

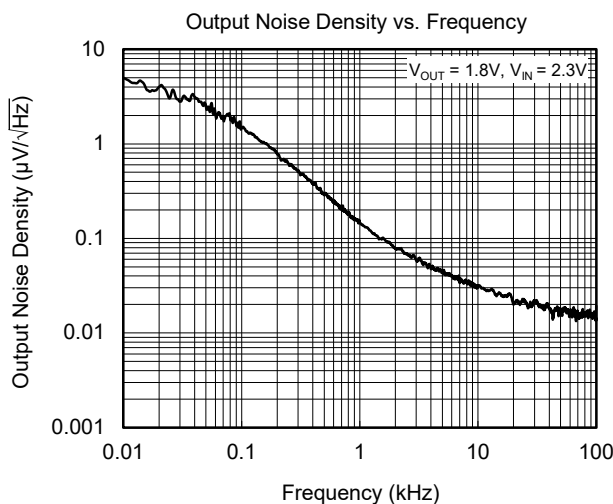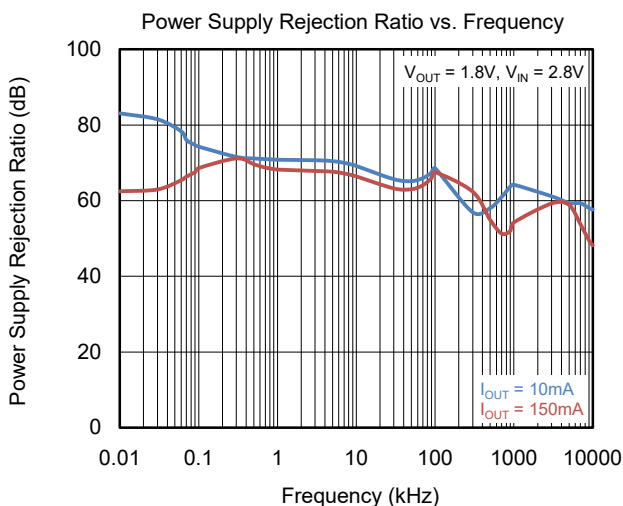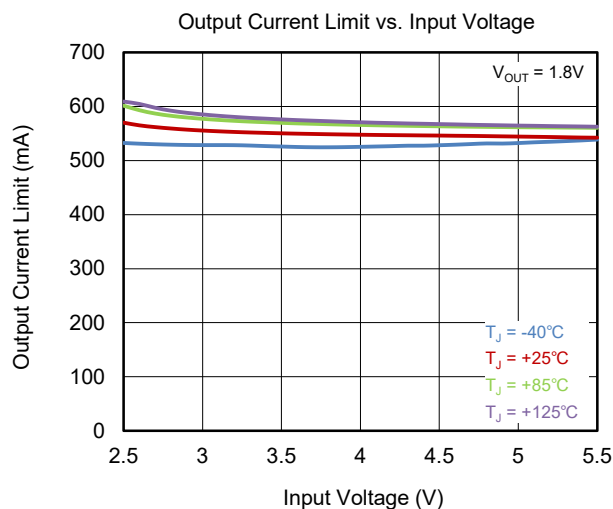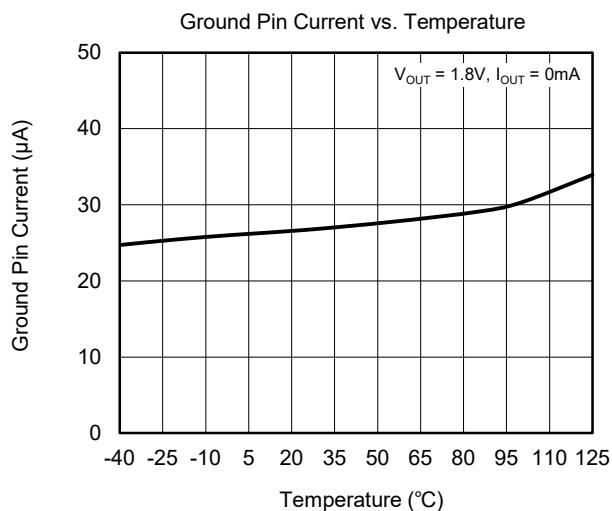

APPLICATION INFORMATION

The SGM2085LxQ is a low noise, high PSRR, low I_Q and low dropout voltage linear regulator and provides 300mA output current. These features make the device a reliable solution to solve many challenging problems in the generation of clean and accurate power supply. The high performance also makes the SGM2085LxQ useful in a variety of applications. The SGM2085LxQ provides protection functions for output overload and overheating.

The SGM2085LxQ provides an EN pin as an external chip enable control to enable/disable the device. When the regulator is in shutdown state, the shutdown current consumes as low as 0.01 μ A (TYP).

Input Capacitor Selection (C_{IN})

The input decoupling should be placed as close as possible to the IN pin for ensuring the device stability. 1 μ F or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance.

When V_{IN} is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can limit the input tracking inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings. For C_{OUT} with larger capacitance, it is recommended to choose the larger capacitance C_{IN} .

Output Capacitor Selection (C_{OUT})

One or more output capacitors are required to maintain the stability of the LDO, and the output capacitors should be placed as close as possible to the OUT pin. In addition, in order to obtain the best transient performance, it is recommended to use X7R and X5R ceramic capacitors as output capacitors. Ceramic capacitors have low equivalent series resistance (ESR), excellent temperature and DC bias characteristics. However, it cannot be ignored that the effective capacitance of ceramic capacitors is affected by temperature, DC bias and package size.

For example, Figure 3 shows the capacitance and DC bias and temperature characteristics of 0805, 10V, 10 μ F $\pm$ 10%, X7R capacitor. Therefore, it is necessary to evaluate whether the effective capacitance of the output capacitor can meet the stability requirements of the LDO in practical applications. In general, a capacitor in higher voltage rating and a larger package exhibits better stability, and the effective capacitance can be obtained from the manufacturer datasheet.

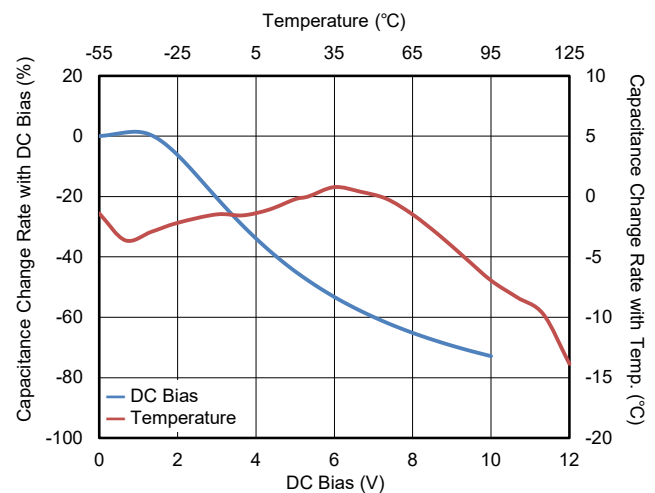


Figure 4. Capacitance vs. DC Bias and Temperature Characteristics

The SGM2085LxQ requires a minimum effective capacitance of 0.5 μ F for C_{OUT} to ensure stability. Additionally, C_{OUT} with larger capacitance and lower ESR will help increase the high frequency PSRR and improve the load transient response.

Dropout Voltage and V_{IN}

The SGM2085LxQ features low dropout voltage due to low $R_{DS(ON)}$ PMOSFET power transistor. For Linear regulator, when $(V_{IN} - V_{OUT}) < \text{dropout voltage } (V_{DROP})$, the PMOSFET power transistor will be turned on like a switch and the parameter of linear regulator, such as PSRR, load and input transient responses, will be degraded so much. To get good performance in application, the V_{IN} must be larger than $(V_{OUT} + V_{DROP})$.

APPLICATION INFORMATION (continued)

Adjustable Regulator

The output voltage of the SGM2085L-ADJQ can be adjusted from 0.8V to 5.0V. The FB pin will be connected to two external resistors as shown in Figure 5. The output voltage is determined by the following equation:

$$V_{OUT} = V_{FB} \times \left(1 + \frac{R_1}{R_2}\right) \quad (1)$$

where:

V_{OUT} is output voltage and V_{FB} is the internal voltage reference, $V_{FB} = 0.8V$.

One parallel capacitor (C_{FF}) with R_1 can be used to improve the feedback loop stability and PSRR, increase the transient response and reduce the output noise. R_1 and R_2 can be calculated for any output voltage range using equation 1. Choose $R_2 \leq 20k\Omega$ to maintain a 40 μ A minimum load.

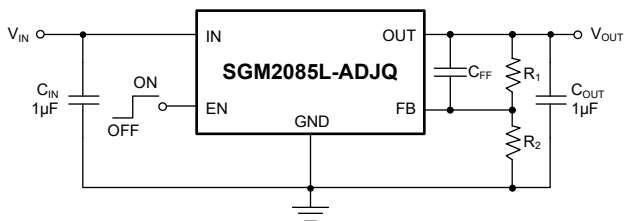


Figure 5. Adjustable Output Voltage Application

Enable Operation

The EN pin of the SGM2085LxQ is used to enable/disable the device and to deactivate/activate the output automatic discharge function.

When the EN pin voltage is lower than 0.4V, the device is in shutdown state. There is no current flowing from IN to OUT pins. In this state, the automatic discharge transistor is active to discharge the output voltage through a 120 Ω (TYP) resistor.

When the EN pin voltage is higher than 0.8V, the device is in active state. The output voltage is regulated to the expected value and the automatic discharge transistor is turned off.

Under-Voltage Lockout (UVLO)

To protect the device from malfunctioning when the input voltage is insufficient, under-voltage lockout (UVLO) protection is included. The device will not operate until the input voltage exceeds UVLO rising threshold, and will lockout if the input voltage falls below the UVLO falling threshold. The local input capacitance prevents severe brownouts in most applications.

Output Current Limit Protection

When overload events happen, the output current is internally limited to 550mA (TYP). When the OUT pin is shorted to ground, the output current is internally limited to 300mA (TYP).

Thermal Shutdown

When the die temperature exceeds the threshold value of thermal shutdown, the SGM2085LxQ will be in shutdown state and it will remain in this state until the die temperature decreases to +140°C.

Power Dissipation (P_D)

Power dissipation (P_D) of the SGM2085LxQ can be calculated by the equation $P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$. The maximum allowable power dissipation ($P_{D(MAX)}$) of the SGM2085LxQ is affected by many factors, including the difference between junction temperature and ambient temperature ($T_{J(MAX)} - T_A$), package thermal resistance from the junction to the ambient environment (θ_{JA}), the rate of ambient airflow and PCB layout. $P_{D(MAX)}$ can be approximated by the following equation:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA} \quad (2)$$

Layout Guidelines

To get good PSRR, low output noise and high transient response performance, the input and output bypass capacitors must be placed as close as possible to the IN pin and OUT pin separately.


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


AUGUST 2026 – REV.A to REV.A.1	Page
Updated Absolute Maximum Ratings section.....	2
Updated Electrical Characteristics section	6
Changes from Original to REV.A (MARCH 2026)	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS


XTDFN-1×1-4L

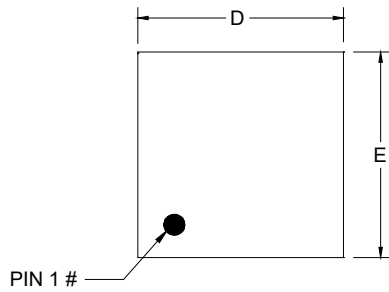



TOP VIEW

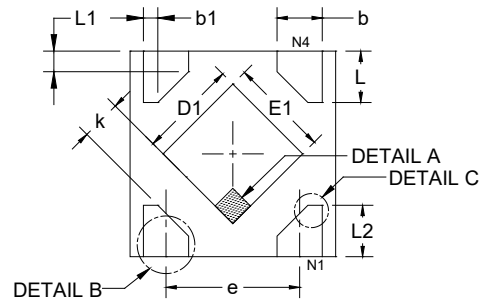

BOTTOM VIEW

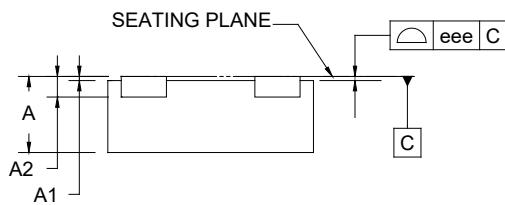

SIDE VIEW

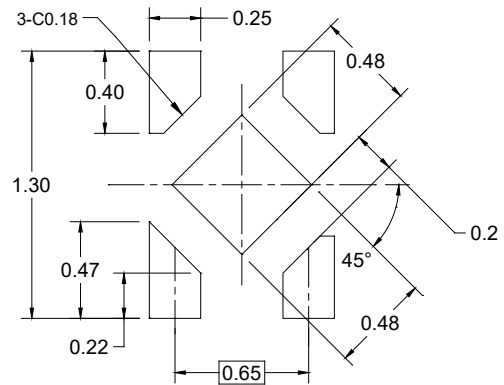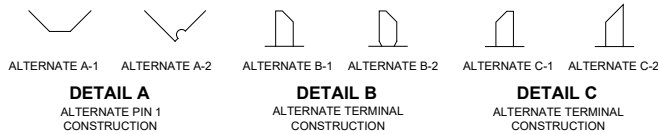



RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.340	0.370	0.400
A1	0.000	0.020	0.050
A2	0.100 REF		
b	0.170	-	0.300
b1	0.068 REF		
D	0.950	1.000	1.050
E	0.950	1.000	1.050
D1	0.430	0.480	0.530
E1	0.430	0.480	0.530
L	0.200	0.250	0.300
L1	0.093 REF		
L2	0.200	-	0.370
e	0.650 BSC		
k	0.150	-	-
eee	-	0.050	-



NOTE: This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

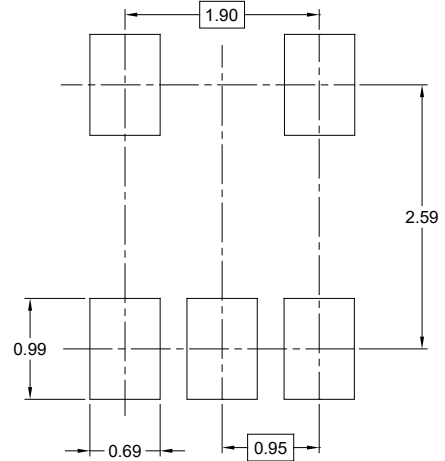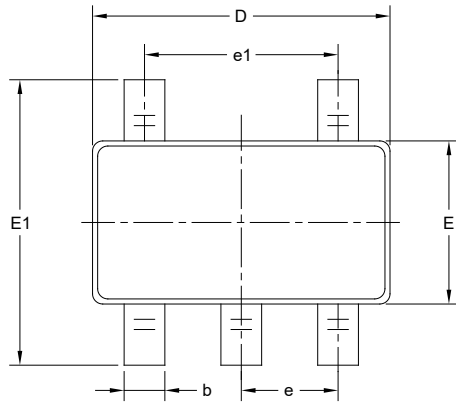

RECOMMENDED LAND PATTERN (Unit: mm)

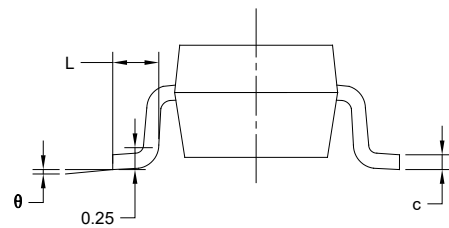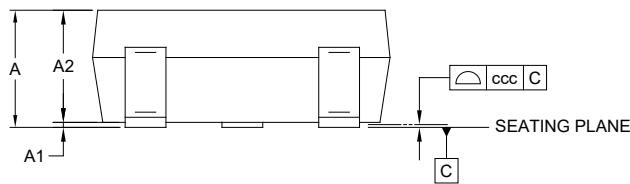

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		


NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

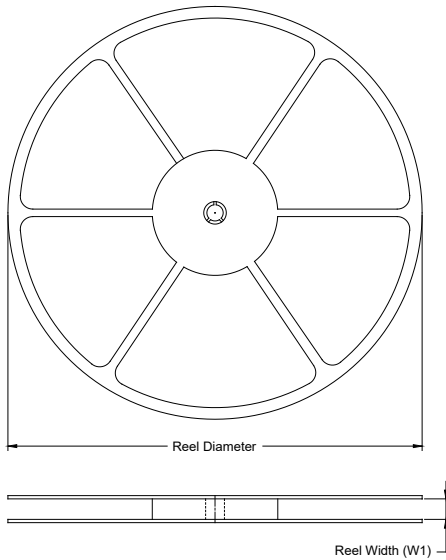

TAPE DIMENSIONS

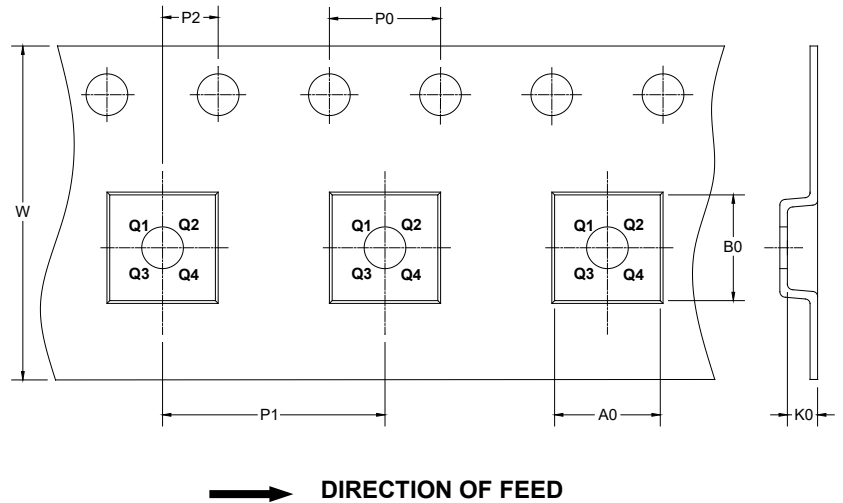

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
XTDFN-1×1-4L	7"	9.5	1.14	1.17	0.56	4.0	4.0	2.0	8.0	Q2
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

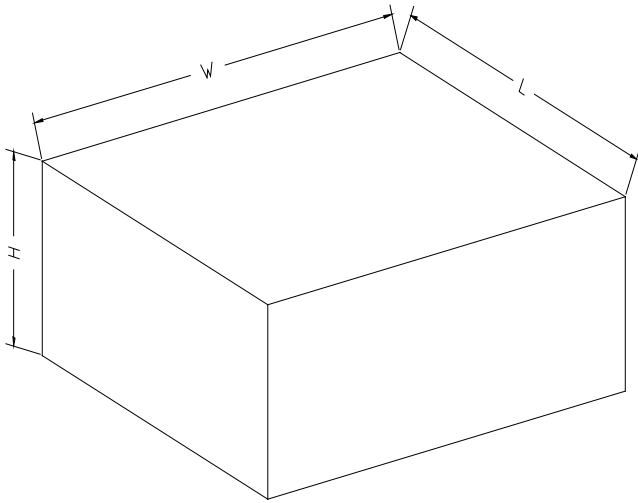

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002