



SGM2080xQ

Automotive 500mA, Fast Transient Response, Low Noise and High Accuracy LDO with Power-Good

GENERAL DESCRIPTION

The SGM2080xQ is a CMOS, fast transient response, low noise and high accuracy linear regulator. It is capable of supplying 500mA output current with typical dropout voltage of only 80mV. The operating input voltage range is from 1.5V to 5.5V. The fixed output voltage range is from 0.8V to 4.2V and adjustable output voltage range is from 0.55V to 5.0V.

Other features include an open-drain power-good (PG) output, logic-controlled shutdown mode, current limit and thermal shutdown protection. The SGM2080xQ has automatic discharge function to quickly discharge V_{OUT} in the disabled status.

This device is AEC-Q100 qualified (Automotive Electronics Council (AEC) standard Q100 Grade 1) and it is suitable for automotive applications.

The SGM2080xQ is available in Green TDFN-2x2-6DL and TDFN-3x3-8KL packages. It operates over an ambient temperature range of -40°C to +125°C.

FEATURES

- **AEC-Q100 Qualified for Automotive Applications**
Device Temperature Grade 1
 $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
- **Operating Input Voltage Range: 1.5V to 5.5V**
- **Fixed Output from 0.8V to 4.2V**
- **Adjustable Output from 0.55V to 5.0V**
- **500mA Output Current**
- **Output Voltage Accuracy: $\pm 1\%$ at $+25^{\circ}\text{C}$**
- **Quiescent Current: 85 μA (TYP)**
- **Low Dropout Voltage:**
80mV (TYP) at 500mA, $V_{OUT} = 5\text{V}$
- **Current Limiting and Thermal Protection**
- **Excellent Load and Line Transient Responses**
- **With Output Automatic Discharge**
- **UVLO with Hysteresis**
- **Support Power-Good Indicator Function**
- **Stable with Small Case Size Ceramic Capacitors**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green TDFN-2x2-6DL and TDFN-3x3-8KL Packages**

APPLICATIONS

General Purpose Automotive & Industrial
Automotive Entertainment System

TYPICAL APPLICATION CIRCUITS

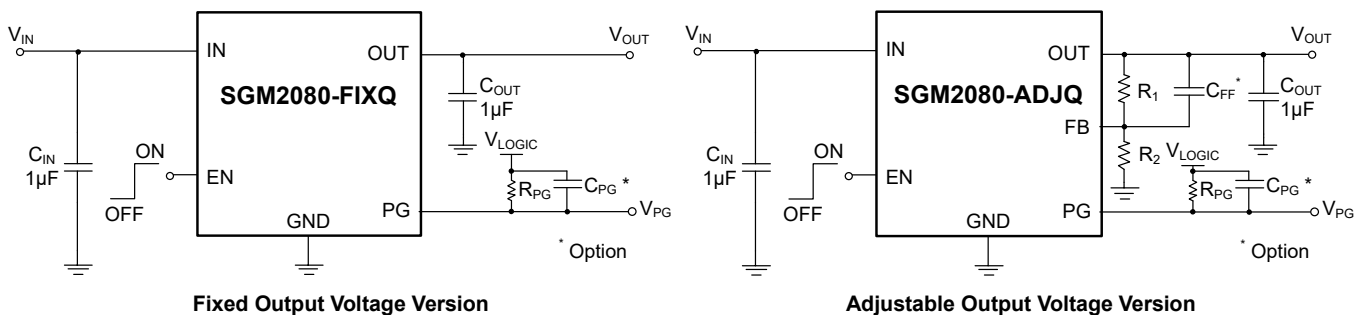


Figure 1. Typical Application Circuits

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

PACKAGE/ORDERING INFORMATION

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|---------------|---------------------|-----------------------------------|-----------------------|-----------------|---------------------|
| SGM2080-0.8Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-0.8QTGC6G/TR | 1QI XXXX | Tape and Reel, 3000 |
| SGM2080-0.9Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-0.9QTGC6G/TR | 1QJ XXXX | Tape and Reel, 3000 |
| SGM2080-1.0Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-1.0QTGC6G/TR | 1QK XXXX | Tape and Reel, 3000 |
| SGM2080-1.05Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-1.05QTGC6G/TR | 1QL XXXX | Tape and Reel, 3000 |
| SGM2080-1.1Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-1.1QTGC6G/TR | 1QM XXXX | Tape and Reel, 3000 |
| SGM2080-1.2Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-1.2QTGC6G/TR | 1QN XXXX | Tape and Reel, 3000 |
| SGM2080-1.5Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-1.5QTGC6G/TR | 1QO XXXX | Tape and Reel, 3000 |
| SGM2080-1.8Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-1.8QTGC6G/TR | 1QP XXXX | Tape and Reel, 3000 |
| SGM2080-2.5Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-2.5QTGC6G/TR | 1QQ XXXX | Tape and Reel, 3000 |
| SGM2080-2.8Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-2.8QTGC6G/TR | 1QR XXXX | Tape and Reel, 3000 |
| SGM2080-3.0Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-3.0QTGC6G/TR | 1QS XXXX | Tape and Reel, 3000 |
| SGM2080-3.3Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-3.3QTGC6G/TR | 1QT XXXX | Tape and Reel, 3000 |
| SGM2080-4.2Q | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-4.2QTGC6G/TR | 1QU XXXX | Tape and Reel, 3000 |
| SGM2080-ADJQ | TDFN-2×2-6DL | -40°C to +125°C (T _A) | SGM2080-ADJQTGC6G/TR | 1QV XXXX | Tape and Reel, 3000 |

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good


PACKAGE/ORDERING INFORMATION (continued)

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|---------------|---------------------|-----------------------------------|-----------------------|--------------------------|---------------------|
| SGM2080-0.8Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-0.8QTHW8G/TR | 1QWTHW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-0.9Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-0.9QTHW8G/TR | 1QXTHW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-1.0Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-1.0QTHW8G/TR | 1QYTHW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-1.05Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-1.05QTHW8G/TR | 1QZTHW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-1.1Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-1.1QTHW8G/TR | 1R0THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-1.2Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-1.2QTHW8G/TR | 1R1THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-1.5Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-1.5QTHW8G/TR | 1R2THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-1.8Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-1.8QTHW8G/TR | 1R3THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-2.5Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-2.5QTHW8G/TR | 1R4THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-2.8Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-2.8QTHW8G/TR | 1R5THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-3.0Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-3.0QTHW8G/TR | 1R6THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-3.3Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-3.3QTHW8G/TR | 1R7THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-4.2Q | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-4.2QTHW8G/TR | 1R8THW XXXXX XX#XX | Tape and Reel, 4000 |
| SGM2080-ADJQ | TDFN-3×3-8KL | -40°C to +125°C (T _A) | SGM2080-ADJQTHW8G/TR | 1R9THW XXXXX XX#XX | Tape and Reel, 4000 |


MARKING INFORMATION

NOTE: XXXX = Date Code, Trace Code and Vendor Code. XXXXX = Date Code, Trace Code and Vendor Code. XX#XX = Coordinate Information and Wafer ID Number.

TDFN-2×2-6DL



TDFN-3×3-8KL

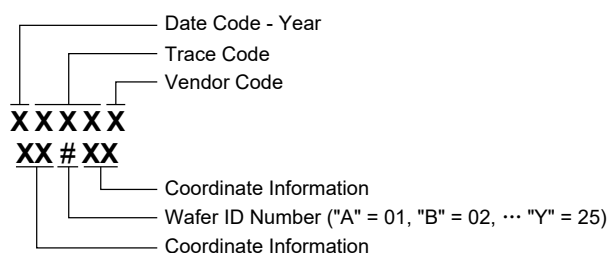

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

SGM2080xQ Automotive 500mA, Fast Transient Response, Low Noise and High Accuracy LDO with Power-Good

ABSOLUTE MAXIMUM RATINGS

| | |
|---|------------------------------|
| IN to GND | -0.3V to 6V |
| OUT to GND | -0.3V to ($V_{IN} + 0.3V$) |
| EN, PG to GND..... | -0.3V to 6V |
| Power-Good Current..... | $\pm 12mA$ |
| Package Thermal Resistance | |
| TDFN-2x2-6DL, θ_{JA} | 59.2°C/W |
| TDFN-2x2-6DL, θ_{JB} | 26.6°C/W |
| TDFN-2x2-6DL, $\theta_{JC(TOP)}$ | 71.4°C/W |
| TDFN-2x2-6DL, $\theta_{JC(BOT)}$ | 8.6°C/W |
| TDFN-3x3-8KL, θ_{JA} | 45.7°C/W |
| TDFN-3x3-8KL, θ_{JB} | 21.1°C/W |
| TDFN-3x3-8KL, $\theta_{JC(TOP)}$ | 47.1°C/W |
| TDFN-3x3-8KL, $\theta_{JC(BOT)}$ | 8.2°C/W |
| Junction Temperature | +150°C |
| Storage Temperature Range..... | -65°C to +150°C |
| Lead Temperature (Soldering, 10s) | +260°C |
| ESD Susceptibility ⁽¹⁾⁽²⁾ | |
| HBM..... | $\pm 8000V$ |
| CDM | $\pm 1000V$ |

1. For human body model (HBM), all pins comply with AEC-Q100-002 specification.
2. For charged device model (CDM), all pins comply with AEC-Q100-011 specification.

RECOMMENDED OPERATING CONDITIONS

| | |
|---|----------------------------|
| Input Voltage Range | 1.5V to 5.5V |
| Enable Input Voltage Range | 0V to 5.5V |
| Power-Good Voltage Range | 0V to 5.5V |
| Power-Good Current..... | $\pm 10mA$ |
| Input Effective Capacitance, C_{IN} | 0.5 μF (MIN) |
| Output Effective Capacitance, C_{OUT} | 0.5 μF to 220 μF |
| Operating Ambient Temperature Range..... | -40°C to +125°C |
| Operating Junction Temperature Range..... | -40°C to +150°C |

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION





This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

PIN CONFIGURATIONS

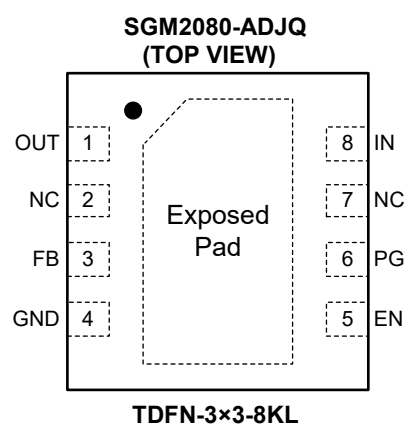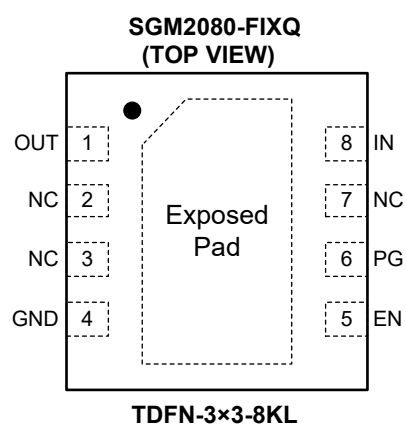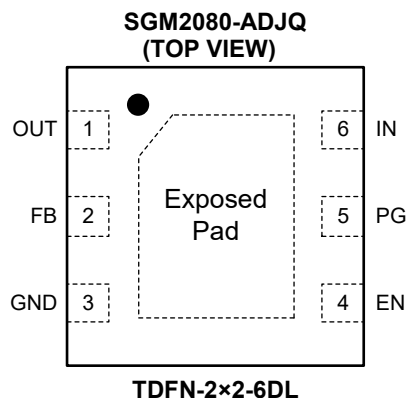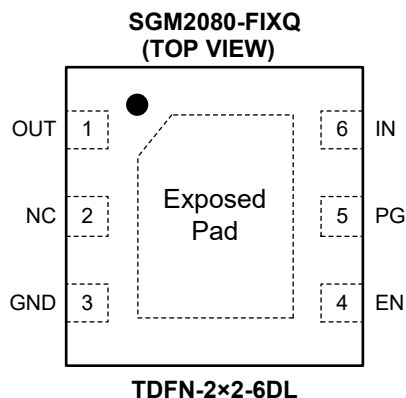

PIN DESCRIPTION

| PIN | | NAME | FUNCTION |
|--------------|--------------|------|--|
| TDFN-2x2-6DL | TDFN-3x3-8KL | | |
| 1 | 1 | OUT | Regulator Output Pin. It is recommended to use a ceramic capacitor with effective capacitance in the range of 0.5 μ F to 220 μ F to ensure stability. This ceramic capacitor should be placed as close as possible to OUT pin. |
| 2 | 3 | NC | No Connection (fixed voltage version only). |
| | | FB | Feedback Pin (adjustable voltage version only). Connect this pin to the midpoint of an external resistor divider to adjust the output voltage. Place the resistors as close as possible to this pin. |
| 3 | 4 | GND | Ground. |
| 4 | 5 | EN | Enable Pin. Drive EN high to turn on the regulator. Drive EN low to turn off the regulator. |
| 5 | 6 | PG | Open-Drain Power-Good Output Pin. An open-drain output and active high when the output voltage reaches the target voltage. |
| 6 | 8 | IN | Input Supply Voltage Pin. It is recommended to use a 1 μ F or larger ceramic capacitor from IN pin to ground to get good power supply decoupling. This ceramic capacitor should be placed as close as possible to IN pin. |
| — | 2, 7 | NC | No Connection. |
| Exposed Pad | Exposed Pad | — | Exposed Pad. Connect it to GND internally. Connect it to a large ground plane to maximize thermal performance. This pad is not an electrical connection point. |

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

FUNCTIONAL BLOCK DIAGRAMS

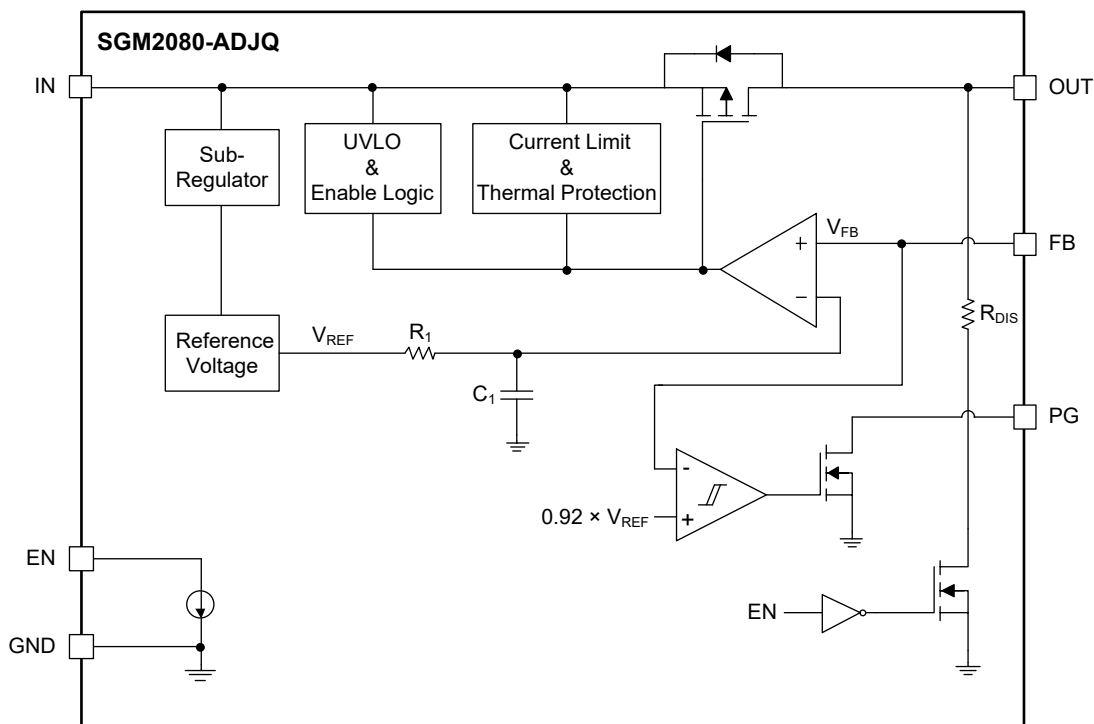


Figure 2. Block Diagram for Adjustable Output Version

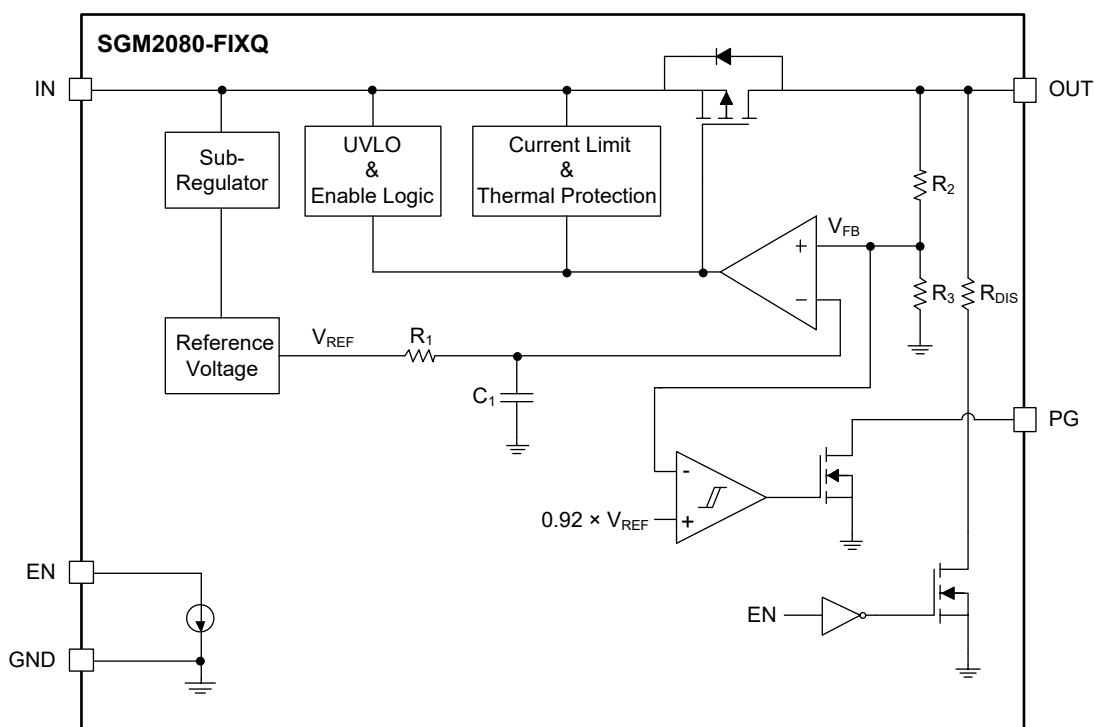


Figure 3. Block Diagram for Fixed Output Version

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

ELECTRICAL CHARACTERISTICS

($V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.5V (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = -40^\circ C$ to $+125^\circ C$ ⁽¹⁾, typical values are at $T_J = +25^\circ C$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|---------------------------------|--|---|---------------------------------------|--------|-------|------------|---------|
| Input Supply Voltage Range | V_{IN} | | 1.5 | | 5.5 | V | |
| Output Voltage Range | V_{OUT} | SGM2080-FIXQ | 0.8 | | 4.2 | V | |
| | | SGM2080-ADJQ | 0.55 | | 5 | | |
| Feedback Voltage | V_{FB} | $V_{IN} = (V_{OUT(NOM)} + 0.5V)$ to 5.5V, $I_{OUT} = 10mA$ | $T_J = +25^\circ C$ | 0.5445 | 0.55 | 0.5555 | V |
| | | | $T_J = -40^\circ C$ to $+125^\circ C$ | 0.5401 | 0.55 | 0.5599 | |
| Output Voltage Accuracy | V_{OUT} | $V_{IN} = (V_{OUT(NOM)} + 0.5V)$ to 5.5V, $I_{OUT} = 10mA$ | $T_J = +25^\circ C$ | -1 | | +1 | % |
| | | | $T_J = -40^\circ C$ to $+125^\circ C$ | -1.8 | | +1.8 | |
| FB Pin Input Current | I_{FB} | | | 1 | 50 | nA | |
| Under-Voltage Lockout | V_{UVLO} | V_{IN} rising | | 1.31 | 1.45 | V | |
| | | V_{IN} falling | 1.15 | 1.29 | | | |
| Line Regulation | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | $V_{IN} = (V_{OUT(NOM)} + 0.5V)$ to 5.5V, $I_{OUT} = 0.1mA$ | | 0.009 | 0.2 | %/V | |
| Load Regulation | $\frac{\Delta V_{OUT}}{\Delta I_{OUT} \times V_{OUT}}$ | $V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 2V (whichever is greater), $I_{OUT} = 0.1mA$ to 500mA | | 0.0004 | 0.003 | %/mA | |
| Dropout Voltage | V_{DROPO} | $I_{OUT} = 500mA$, when V_{OUT} falls to $95\% \times V_{OUT(NOM)}$ | $V_{OUT(NOM)} = 1.8V$ | | 145 | 260 | mV |
| | | | $V_{OUT(NOM)} = 3.3V$ | | 95 | 170 | |
| | | | $V_{OUT(NOM)} = 5V$ | | 80 | 130 | |
| Output Current Limit | I_{LIMIT} | $V_{IN} = V_{OUT} + 2V$, $V_{OUT} = 90\% \times V_{OUT(NOM)}$ | 500 | 950 | | mA | |
| Short-Circuit Current Limit | I_{SHORT} | $V_{IN} = V_{OUT(NOM)} + 2V$, $V_{OUT} = 0V$ | | 290 | | mA | |
| Quiescent Current | I_Q | $I_{OUT} = 0mA$ | $T_J = -40^\circ C$ to $+85^\circ C$ | | 85 | 300 | μA |
| | | | $T_J = -40^\circ C$ to $+125^\circ C$ | | 85 | 800 | |
| Shutdown Current | I_{SHDN} | $V_{EN} = 0V$ | | 0.22 | 5 | μA | |
| Enable Threshold Voltage | V_{IH} | EN input voltage high | 1 | | 5.5 | V | |
| | V_{IL} | EN input voltage low | 0 | | 0.4 | | |
| Enable Input Current | I_{EN} | $V_{EN} = 0V$, $V_{IN} = 5.5V$ | | 20 | 500 | nA | |
| | | $V_{EN} = 5.5V$, $V_{IN} = 5.5V$ | | 150 | 1000 | nA | |
| Output Discharge Resistance | R_{DIS} | $V_{EN} = 0V$, $V_{IN} = 5.5V$ | | 100 | | Ω | |
| Turn-On Time | t_{ON} | $V_{OUT(NOM)} = 3.3V$, from assertion of V_{EN} to $V_{OUT} = 90\% \times V_{OUT(NOM)}$ | | 540 | 1000 | μs | |
| PG High Threshold | PG_{HHTH} | V_{OUT} increasing | 86 | 92 | 98 | $\%V_{FB}$ | |
| PG Low Threshold | PG_{LHTH} | V_{OUT} decreasing | 84 | 90 | 96 | $\%V_{FB}$ | |
| PG Pin Low-Level Output Voltage | $V_{PG(LO)}$ | $V_{IN} \geq 1.5V$, $I_{SINK} = 2mA$ | | 230 | 400 | mV | |
| PG Pin Leakage Current | $I_{PG(LKG)}$ | $V_{OUT} > PG_{HHTH}$, $V_{PG} = 5.5V$ | | 20 | 1000 | nA | |
| PG Delay Time Rising | t_{PGDH} | Time from $92\% \times V_{OUT}$ to 20% of PG, $V_{IN} = 5.5V$ | | 6 | | ms | |
| PG Delay Time Falling | t_{PGDL} | Time from $90\% \times V_{OUT}$ to 80% of PG, $V_{IN} = 5.5V$ | | 10 | | μs | |
| Power Supply Rejection Ratio | PSRR | $V_{OUT(NOM)} = 3.3V$, $V_{IN} = 4.3V$, Ripple $0.2V_{P-P}$, $I_{OUT} = 50mA$, $C_{OUT} = 2.2\mu F$ | $f = 1kHz$ | | 60 | dB | |
| | | | $f = 100kHz$ | | 41 | | |
| | | | $f = 1MHz$ | | 37 | | |

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

ELECTRICAL CHARACTERISTICS (continued)

($V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.5V (whichever is greater), $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = -40^\circ C$ to $+125^\circ C$ ⁽¹⁾, typical values are at $T_J = +25^\circ C$, unless otherwise noted.)







| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS | |
|------------------------------|-------------------|---|-------------------|-----|-----|------------|---------------|
| Output Voltage Noise | e_n | $V_{OUT(NOM)} = 0.55V$, $C_{OUT} = 2.2\mu F$, $f = 10Hz$ to $100kHz$ | $I_{OUT} = 1mA$ | | 24 | | μV_{RMS} |
| | | | $I_{OUT} = 500mA$ | | 16 | | |
| | | $V_{OUT(NOM)} = 3.3V$, $C_{OUT} = 2.2\mu F$, $f = 10Hz$ to $100kHz$ | $I_{OUT} = 1mA$ | | 70 | | |
| | | | $I_{OUT} = 500mA$ | | 67 | | |
| Thermal Shutdown Temperature | T_{SHDN} | T_J rising | | 165 | | $^\circ C$ | |
| Thermal Shutdown Hysteresis | ΔT_{SHDN} | Hysteresis | | 20 | | $^\circ C$ | |

NOTE: 1. Tested under pulse load conditions, so $T_J \approx T_A$.

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

TYPICAL PERFORMANCE CHARACTERISTICS







$V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = +25^\circ C$, unless otherwise noted.

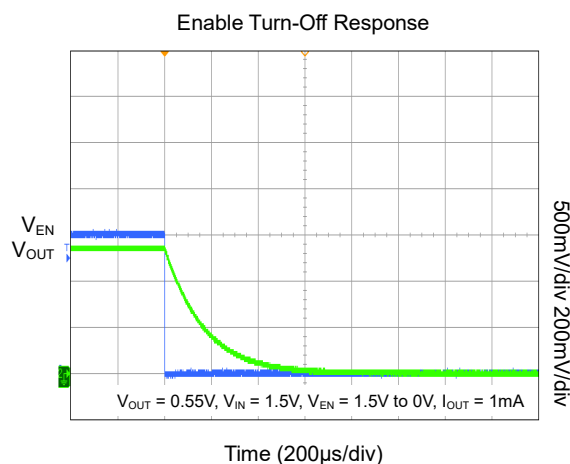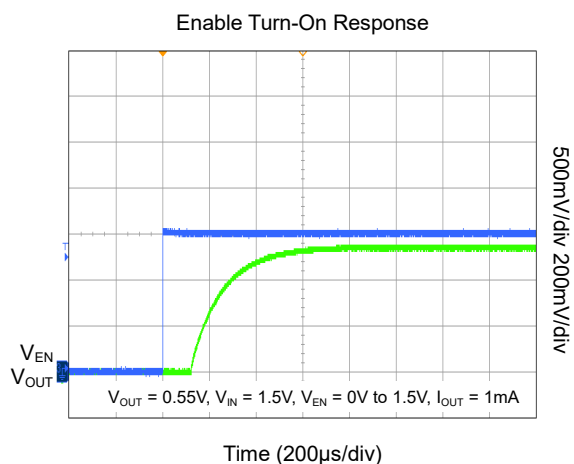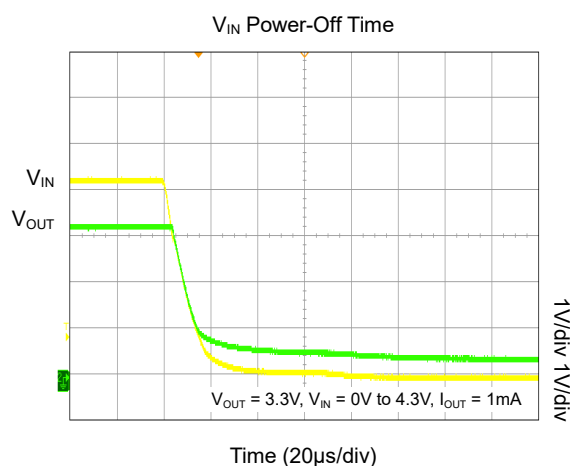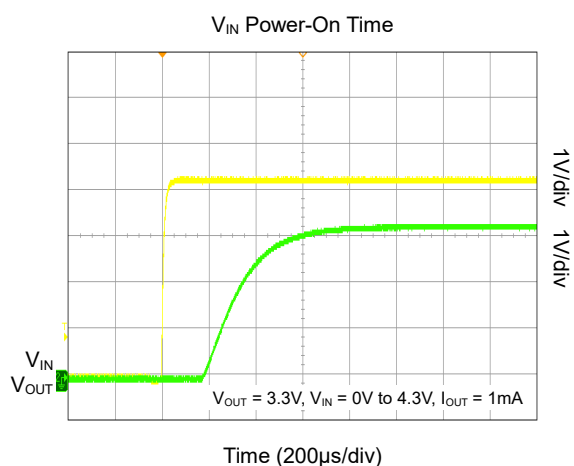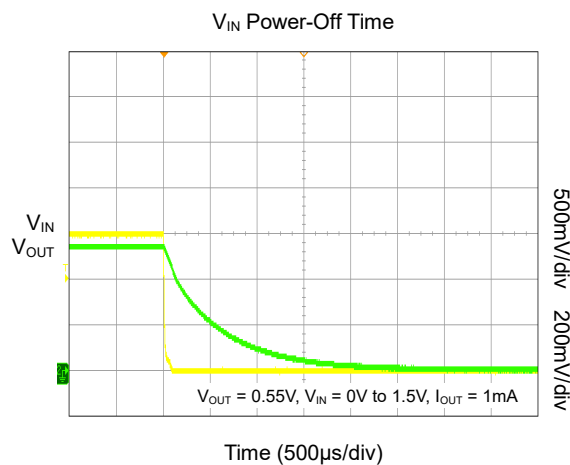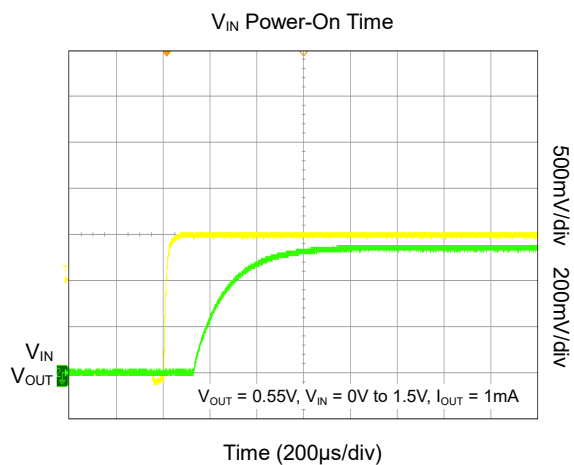

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = +25^\circ C$, unless otherwise noted.

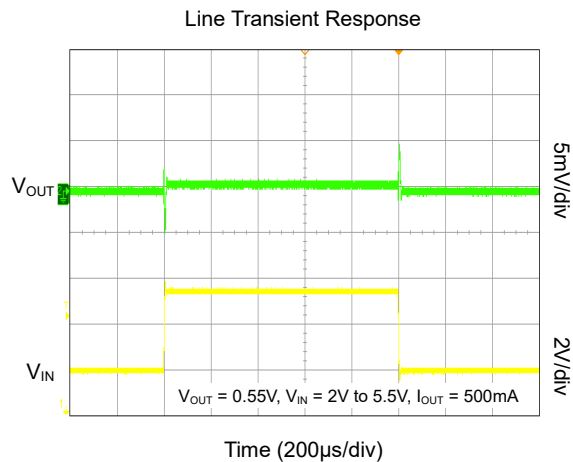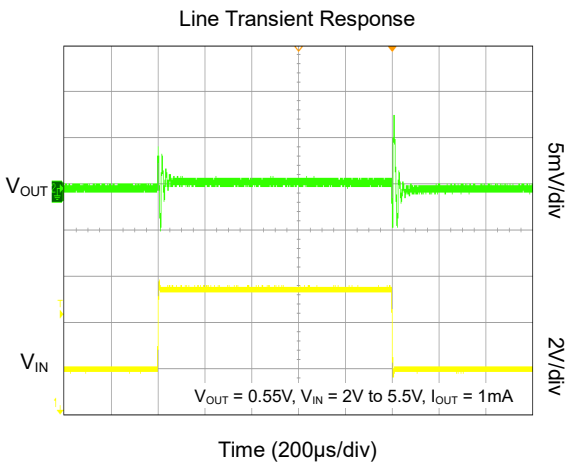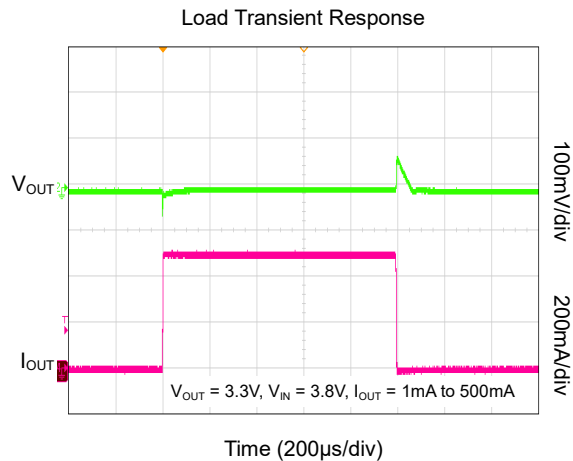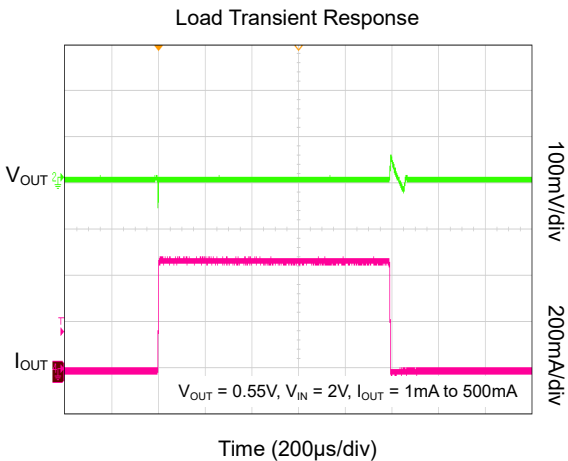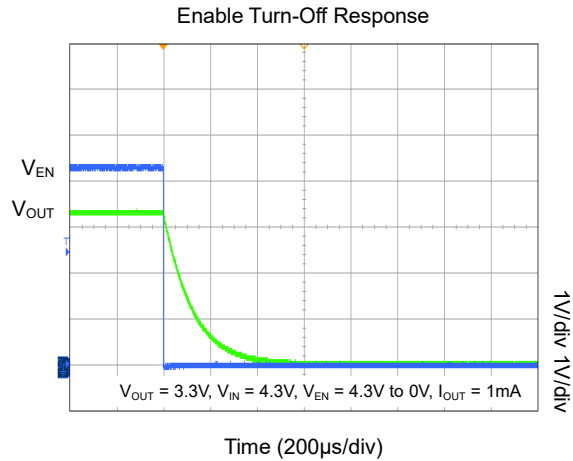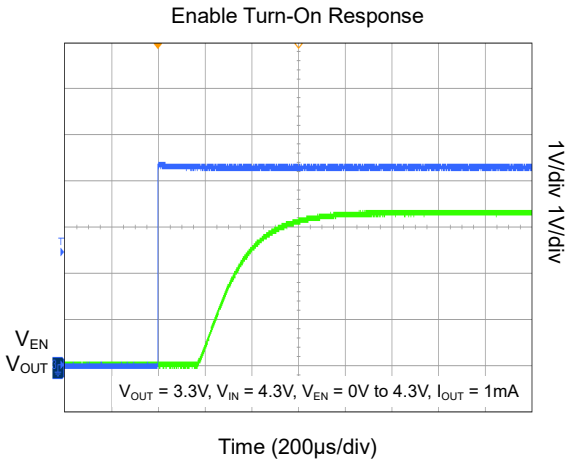

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = +25^\circ C$, unless otherwise noted.

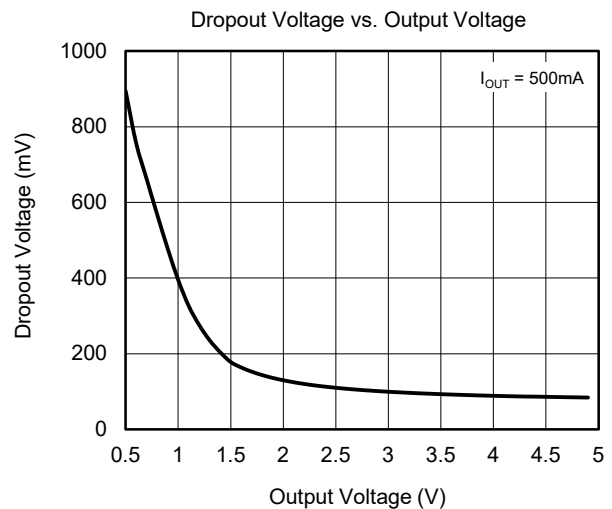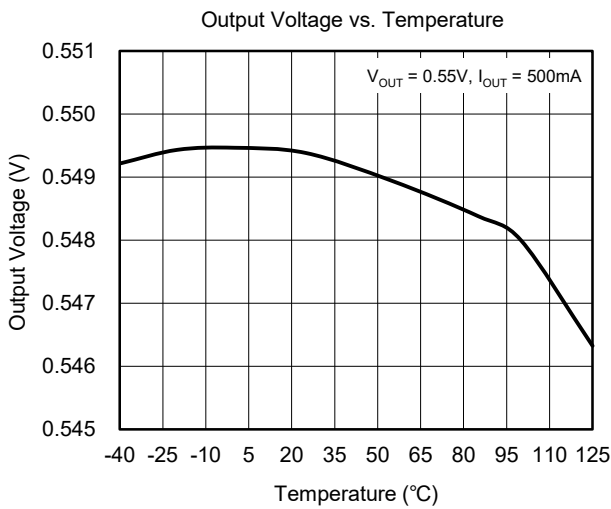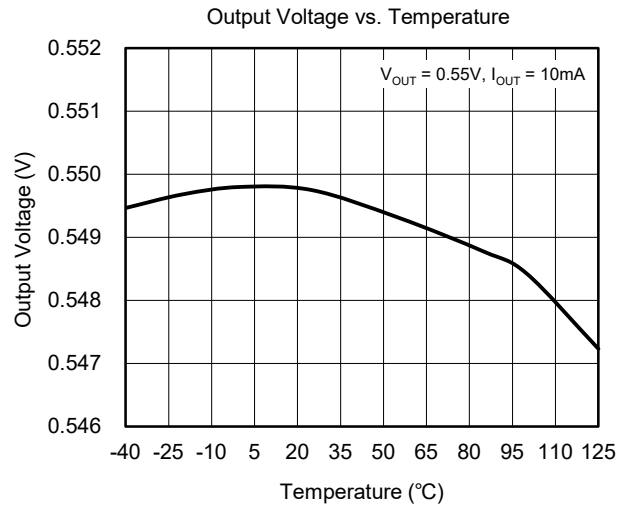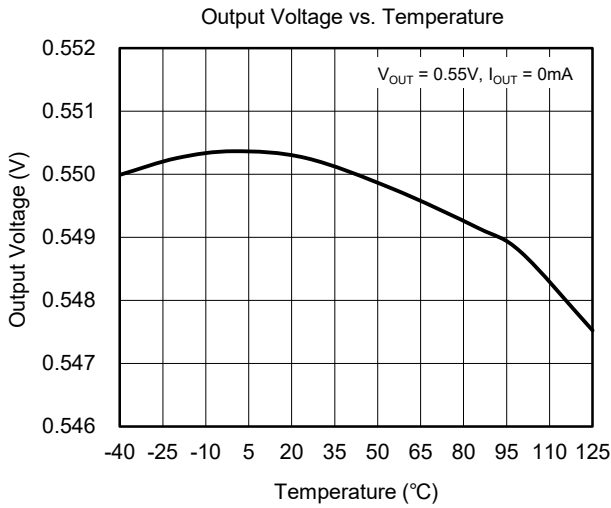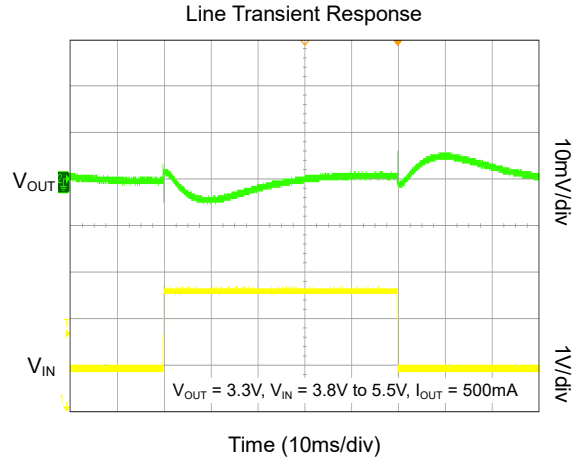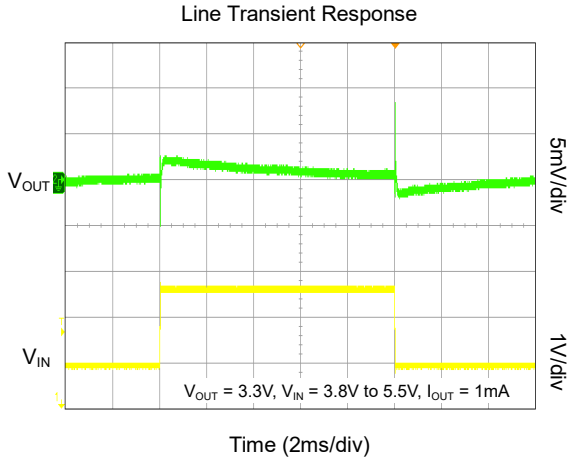

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or 1.5V (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = +25^\circ C$, unless otherwise noted.

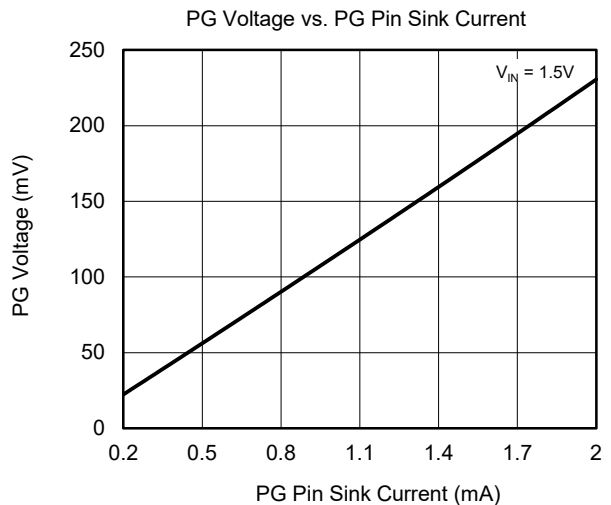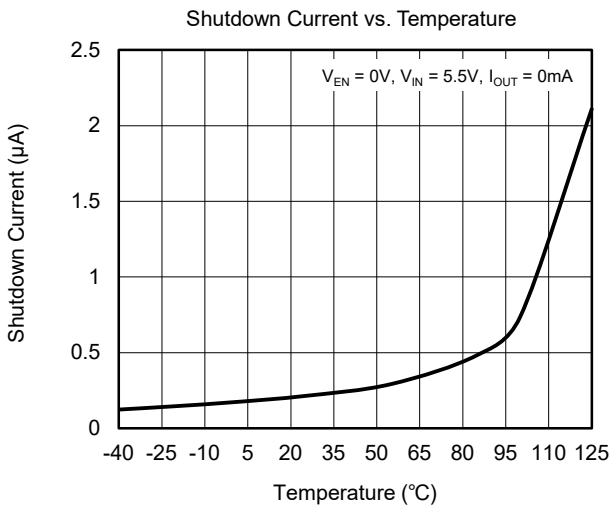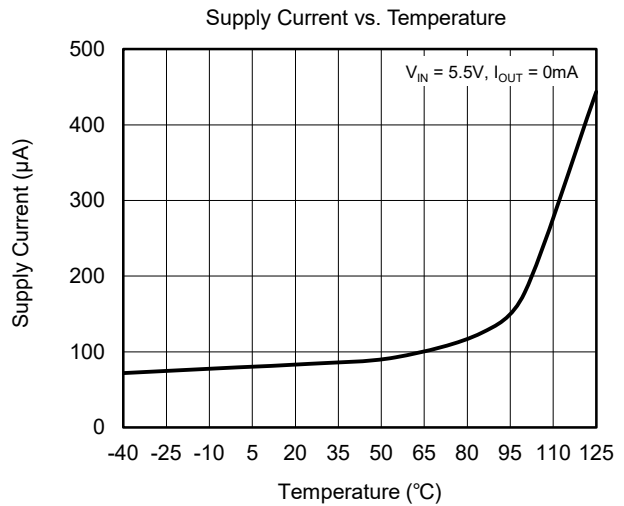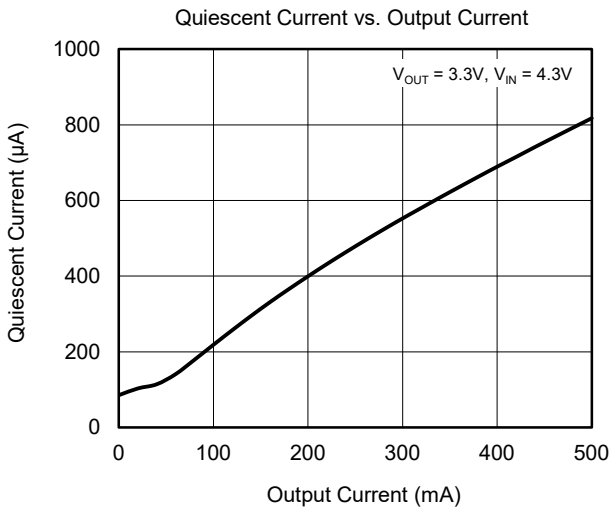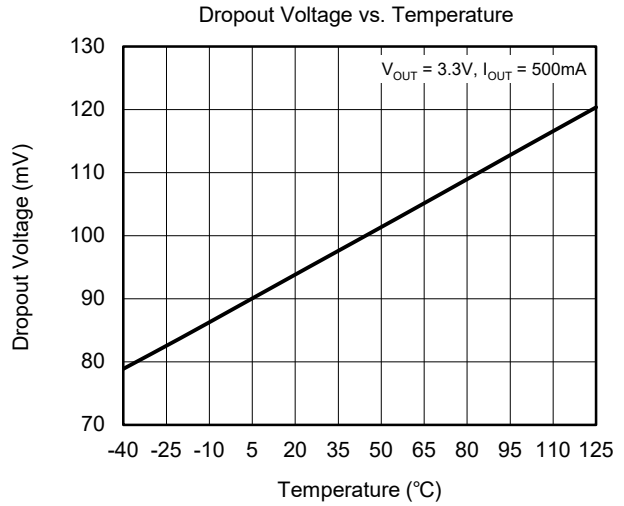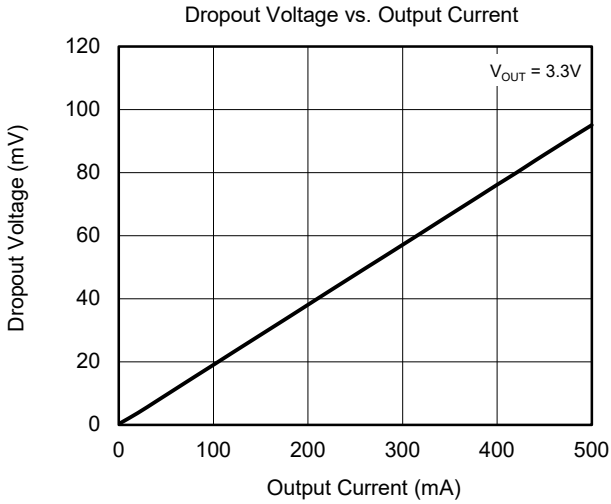

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or $1.5V$ (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = +25^\circ C$, unless otherwise noted.

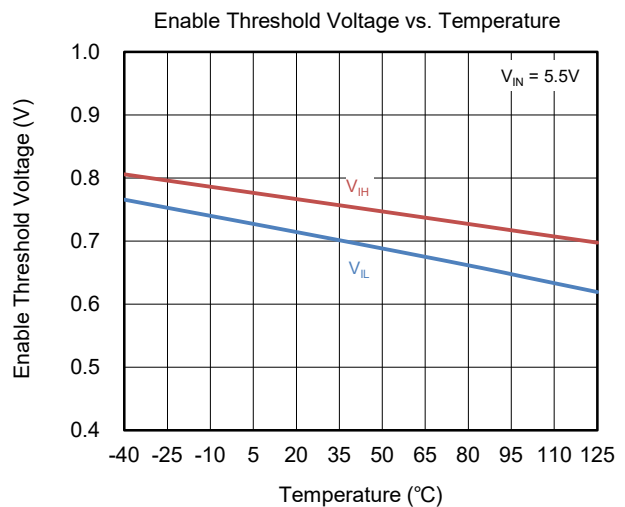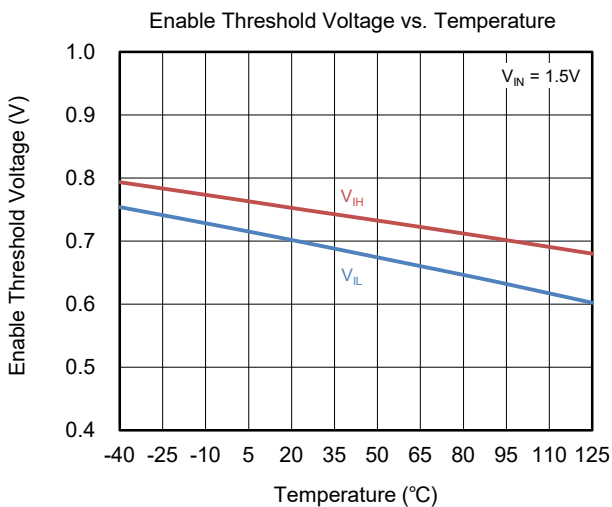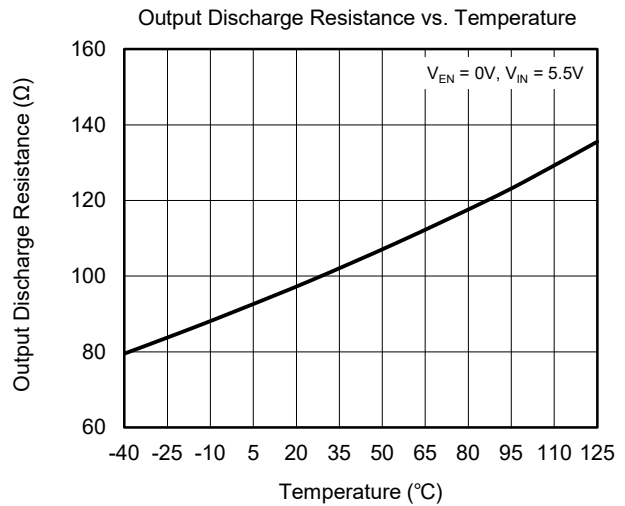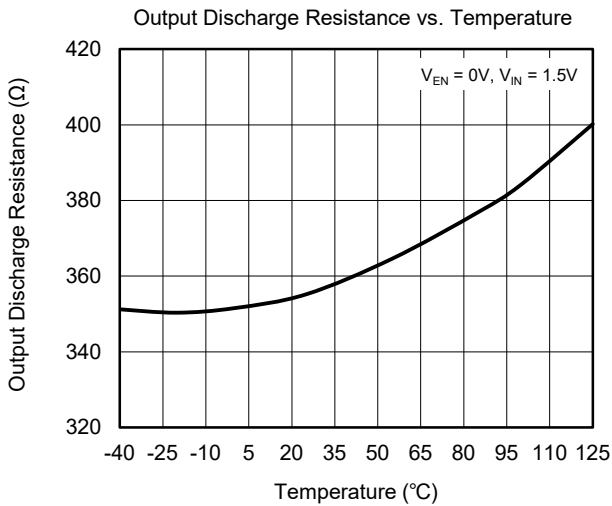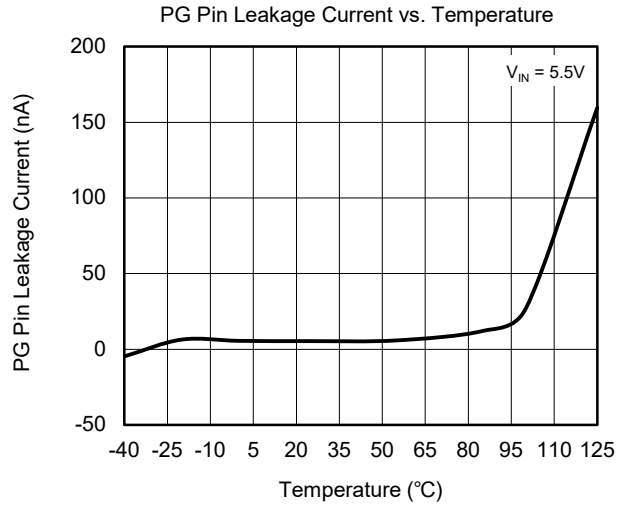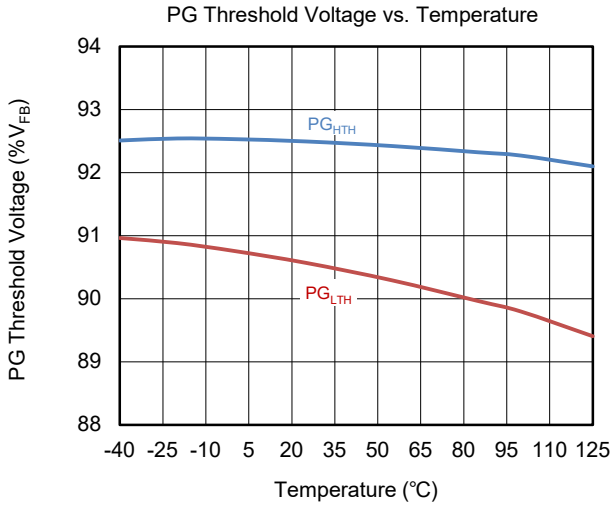

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$V_{IN} = (V_{OUT(NOM)} + 0.5V)$ or $1.5V$ (whichever is greater), $V_{EN} = V_{IN}$, $C_{IN} = 1\mu F$, $C_{OUT} = 1\mu F$, $C_{FF} = 0nF$, $T_J = +25^\circ C$, unless otherwise noted.

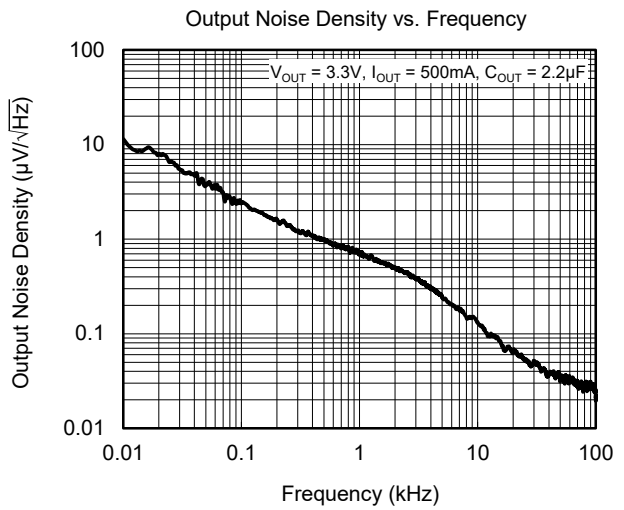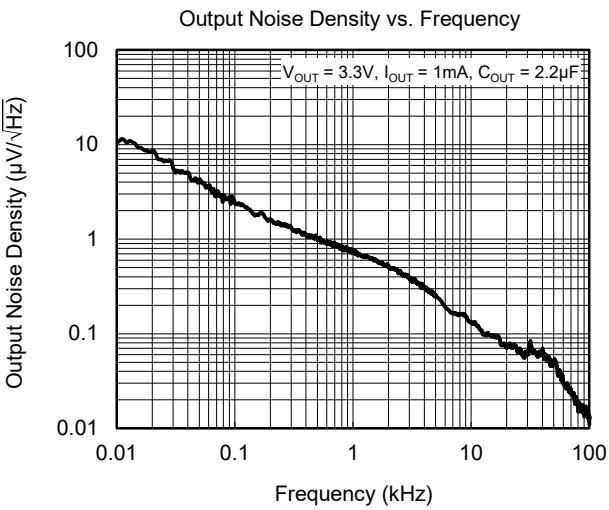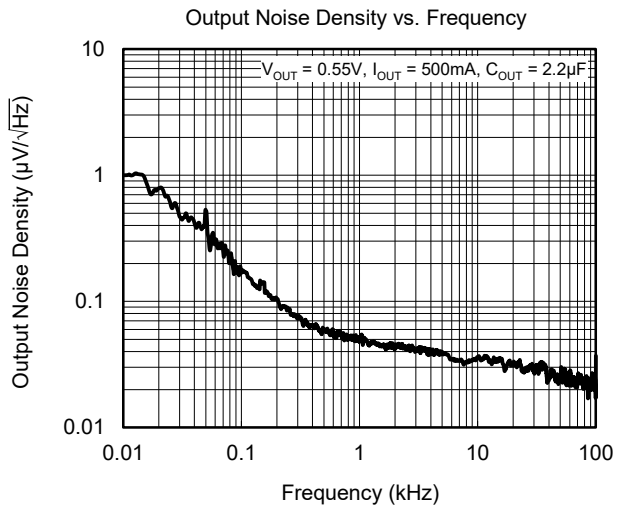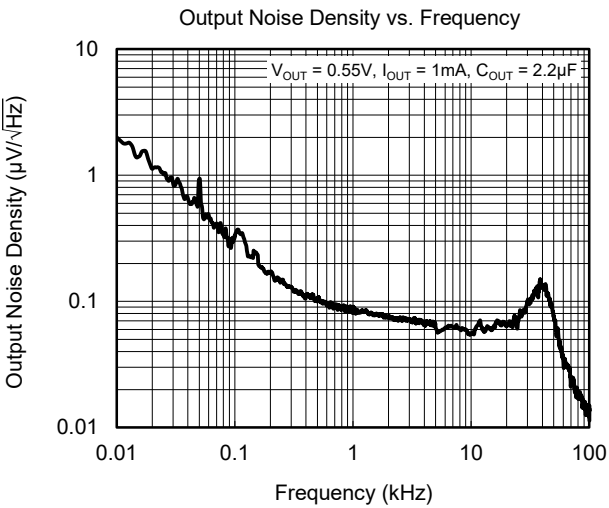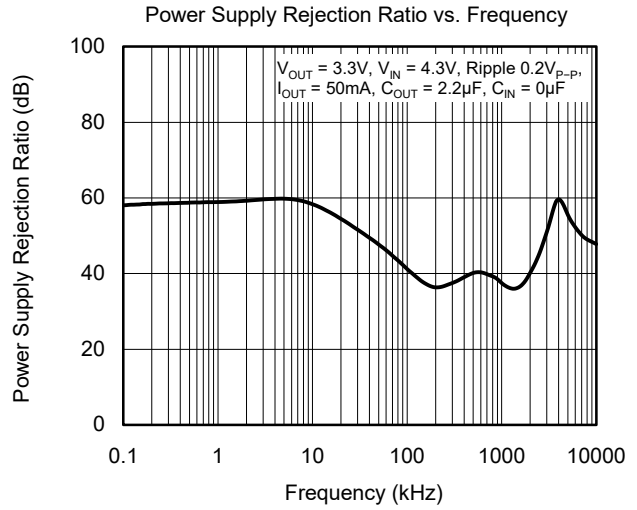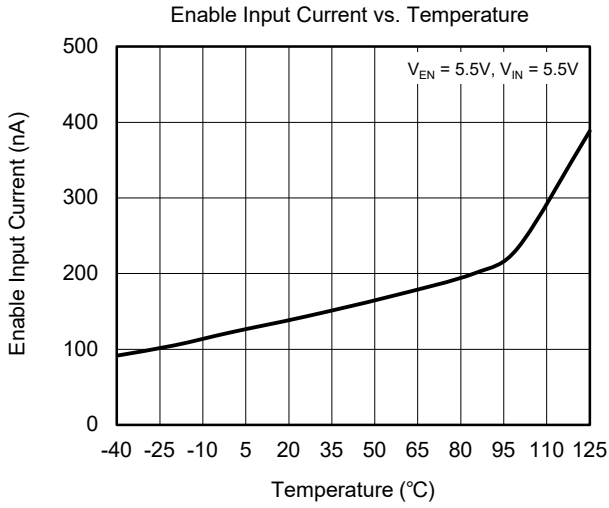

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

APPLICATION INFORMATION

The SGM2080xQ is a low noise and low dropout LDO and provides 500mA output current. These features make the device a reliable solution to solve many challenging problems in the generation of clean and accurate power supply. The high performance also makes the SGM2080xQ useful in a variety of applications. The SGM2080xQ provides protection functions for output overload and overheating.

The SGM2080xQ provides an EN pin as an external chip enable control to enable/disable the device. When the regulator is in shutdown state, the shutdown current consumes as low as 0.22µA (TYP).

Input Capacitor Selection (C_{IN})

The input decoupling capacitor should be placed as close as possible to the IN pin to ensure the device stability. 1µF or larger X7R or X5R ceramic capacitor is selected to get good dynamic performance.

When V_{IN} is required to provide large current instantaneously, a large effective input capacitor is required. Multiple input capacitors can limit the input tracking inductance. Adding more input capacitors is available to restrict the ringing and to keep it below the device absolute maximum ratings. For C_{OUT} with larger capacitance, it is recommended to choose the larger capacitance C_{IN}.

Output Capacitor Selection (C_{OUT})

One or more output capacitors are required to maintain the stability of the LDO, and the output capacitors should be placed as close as possible to the OUT pin. In addition, in order to obtain the best transient performance, it is recommended to use X7R and X5R ceramic capacitors as output capacitors. Ceramic capacitors have low equivalent series resistance (ESR), excellent temperature and DC bias characteristics. However, it cannot be ignored that the effective capacitance of ceramic capacitors is affected by temperature, DC bias and package size.

For example, Figure 4 shows the capacitance and DC bias and temperature characteristics of 0805, 10V, 10µF±10%, X7R capacitor. Therefore, it is necessary to evaluate whether the effective capacitance of the output capacitor can meet the stability requirements of the LDO in practical applications. In general, a capacitor in higher voltage rating and a larger package exhibits better stability, and the effective capacitance can be obtained from the manufacturer datasheet.

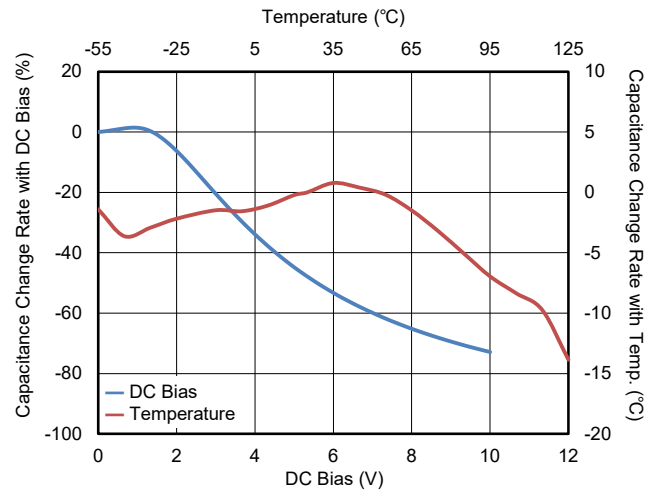


Figure 4. Capacitance vs. DC Bias and Temperature Characteristics

The SGM2080xQ requires a minimum effective capacitance of 0.5µF for C_{OUT} to ensure stability. Additionally, C_{OUT} with larger capacitance and lower ESR will help increase the high frequency PSRR and improve the load transient response.

Adjustable Regulator

The output voltage of the SGM2080-ADJQ can be adjusted from 0.55V to 5.0V. The FB pin will be connected to two external resistors as shown in Figure 5. The output voltage is determined by the following equation:

$$V_{OUT} = V_{FB} \times \left(1 + \frac{R_1}{R_2} \right) \quad (1)$$

where:

V_{OUT} is output voltage and V_{FB} is the internal voltage reference, V_{FB} = 0.55V.

One parallel capacitor (C_{FF}) with R₁ can be used to improve the PSRR, increase the transient response and reduce the output noise. The resistance range of R₂ is recommended to be between 5kΩ and 130kΩ.

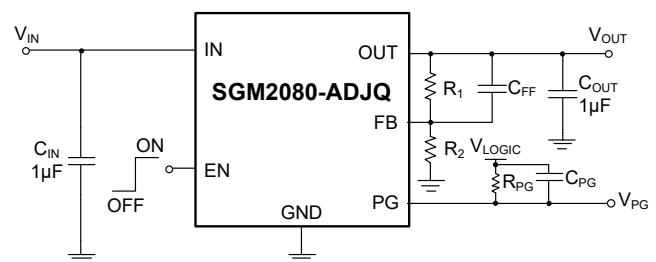


Figure 5. Adjustable Output Voltage Application

Automotive 500mA, Fast Transient Response, SGM2080xQ Low Noise and High Accuracy LDO with Power-Good

APPLICATION INFORMATION (continued)

Enable Operation

The SGM2080xQ uses the EN pin to enable/disable the device and to deactivate/activate the output automatic discharge function.

When the EN pin voltage is lower than 0.4V, the device is in shutdown state. There is no current flowing from IN to OUT pins. In this state, the automatic discharge transistor is active to discharge the output voltage through a 100Ω (TYP) resistor and the PG output is pulled down.

When the EN pin voltage is higher than 1.0V, the device is in active state. The output voltage is regulated to the expected value and the automatic discharge transistor is turned off.

Under-Voltage Lockout (UVLO)

The UVLO circuit monitors the input voltage to prevent the device from turning on before V_{IN} rises above the V_{UVLO} threshold. The UVLO circuit responds quickly to glitches on the IN pin and attempts to disable the output of the device if any of these rails collapses. The local input capacitance prevents severe brownouts in most applications. When the SGM2080xQ enters UVLO, the PG output is pulled down.

Power-Good Function

The SGM2080xQ features PG function for monitoring the feedback voltage, so as to reflect the state of the output voltage. When the output voltage is lower than PG_{LTH} , the PG pin open-drain engages and pulls the PG pin close to GND. When the output voltage is higher than PG_{HTH} , the PG pin is indicated as high impedance. Connecting the PG pin to an external power supply via a pull-up resistor enables any downstream device to receive a power-good valid logic signal for sequencing. The resistance range of the pull-up resistor is recommended to be between 10kΩ and 100kΩ.

When an external feed-forward capacitor (C_{FF}) is added in application, the total LDO startup time constant increases by approximately $3 \times R_1 \times C_{FF}$.

If the Power-Good (PG) output time constant remains unchanged, the PG signal may not accurately indicate whether V_{OUT} has reached the expected voltage. To ensure a valid PG output, the following design configurations must be implemented to match the time constants.

Add a PG delay capacitor (C_{PG}) and connect C_{PG} in parallel with the PG pull-up resistor (R_{PG}) refer to Figure 5. Ensure the following condition is met:

$$3 \times R_{PG} \times C_{PG} \geq 3 \times R_1 \times C_{FF} \quad (2)$$

Figure 6 shows the differences in PG signals when C_{FF} and C_{PG} are added. In Figure 6, t_{REF} is the time that takes for the V_{FB} voltage to rise from 0V to $92\% \times V_{REF}$, t_{CFF} is the startup time contributed by C_{FF} .

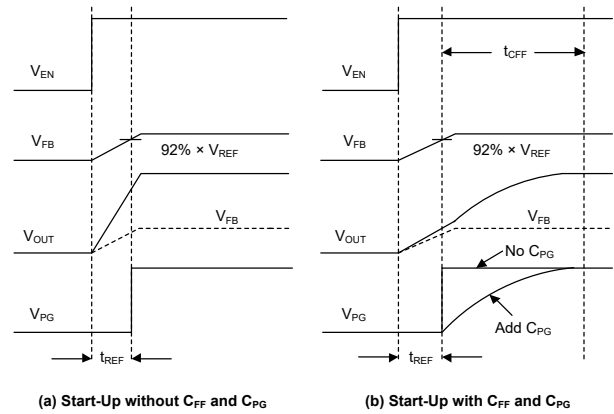


Figure 6. Typical Power-Good Timing Diagram

The PG output is pulled down when the SGM2080xQ is in one of the following states, including disabled, thermal shutdown and UVLO.

Output Current Limit Protection

When overload events happen, the output current is internally limited to 950mA (TYP). When the OUT pin is shorted to ground, the output current is internally limited to 290mA (TYP).

Thermal Shutdown

When the die temperature exceeds the threshold value of thermal shutdown, the SGM2080xQ will be in shutdown state and it will remain in this state until the die temperature decreases to +145°C. When the device enters thermal shutdown, the PG output is pulled low.

Power Dissipation (P_D)

Power dissipation (P_D) of the SGM2080xQ can be calculated by the equation $P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$. The maximum allowable power dissipation ($P_{D(MAX)}$) of the SGM2080xQ is affected by many factors, including the difference between junction temperature and ambient temperature ($T_{J(MAX)} - T_A$), package thermal resistance from the junction to the ambient environment (θ_{JA}), the rate of ambient airflow and PCB layout. $P_{D(MAX)}$ can be approximated by the following equation:

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA} \quad (3)$$

SGM2080xQ Automotive 500mA, Fast Transient Response, Low Noise and High Accuracy LDO with Power-Good

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


| MAY 2026 – REV.A to REV.A.1 | Page |
|---|-------------|
| Update Electrical Characteristics section | 7 |

| Changes from Original to REV.A (JUNE 2025) | Page |
|--|-------------|
| Changed from product preview to production data..... | All |

PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

TDFN-2x2-6DL

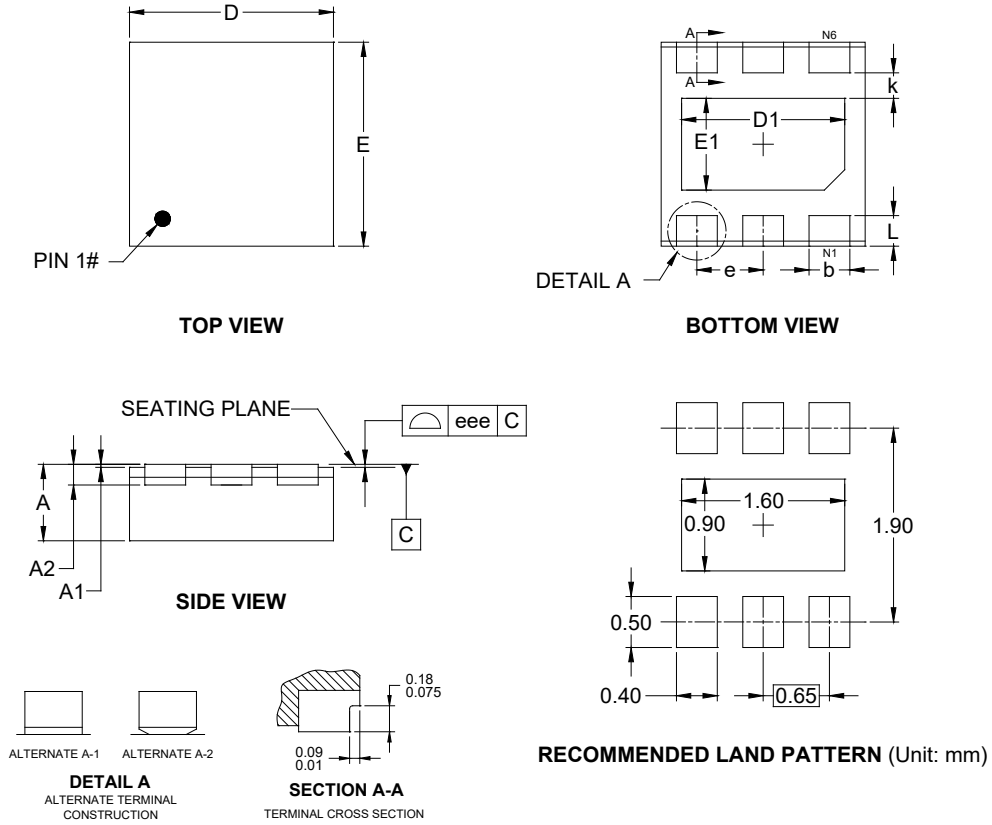


| Symbol | Dimensions In Millimeters | | |
|--------|---------------------------|-----|-------|
| | MIN | NOM | MAX |
| A | 0.700 | - | 0.800 |
| A1 | 0.000 | - | 0.050 |
| A2 | 0.203 REF | | |
| b | 0.350 | - | 0.450 |
| D | 1.900 | - | 2.100 |
| E | 1.900 | - | 2.100 |
| D1 | 1.500 | - | 1.700 |
| E1 | 0.800 | - | 1.000 |
| e | 0.650 BSC | | |
| L | 0.250 | - | 0.350 |
| k | 0.250 REF | | |
| eee | 0.080 | | |

NOTE: This drawing is subject to change without notice.

PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

TDFN-3x3-8KL

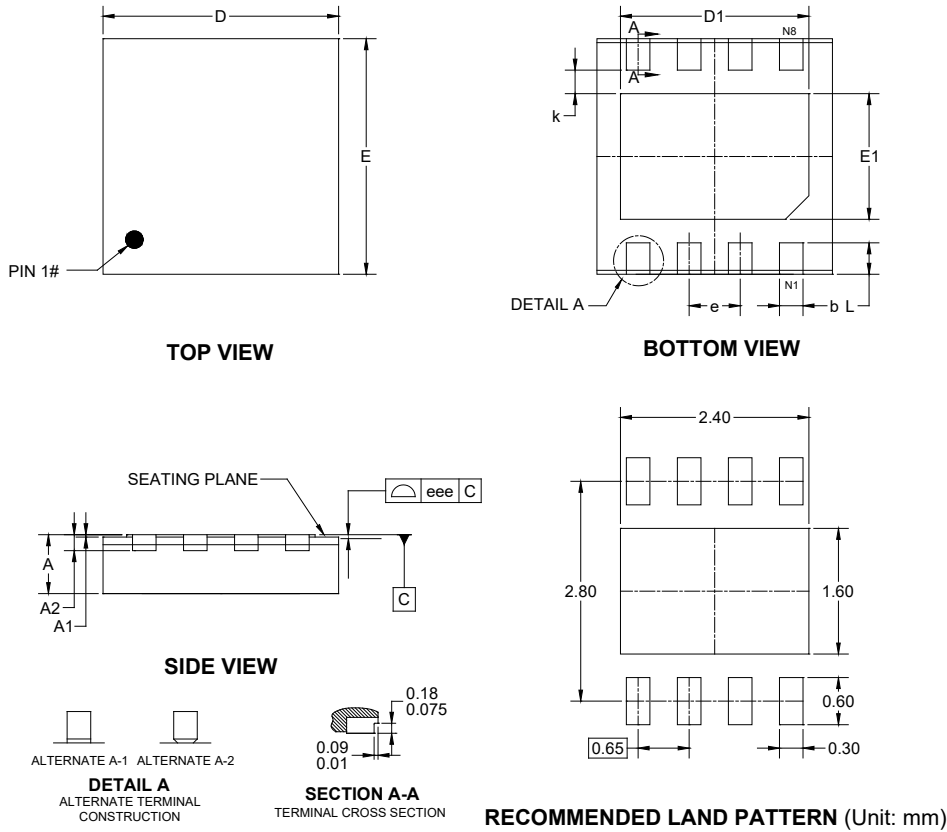


| Symbol | Dimensions In Millimeters | | |
|--------|---------------------------|-----|-------|
| | MIN | NOM | MAX |
| A | 0.700 | - | 0.800 |
| A1 | 0.000 | - | 0.050 |
| A2 | 0.203 REF | | |
| b | 0.250 | - | 0.350 |
| D | 2.900 | - | 3.100 |
| D1 | 2.300 | - | 2.500 |
| E | 2.900 | - | 3.100 |
| E1 | 1.500 | - | 1.700 |
| e | 0.650 BSC | | |
| k | 0.300 REF | | |
| L | 0.300 | - | 0.500 |
| eee | 0.080 | | |

NOTE: This drawing is subject to change without notice.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

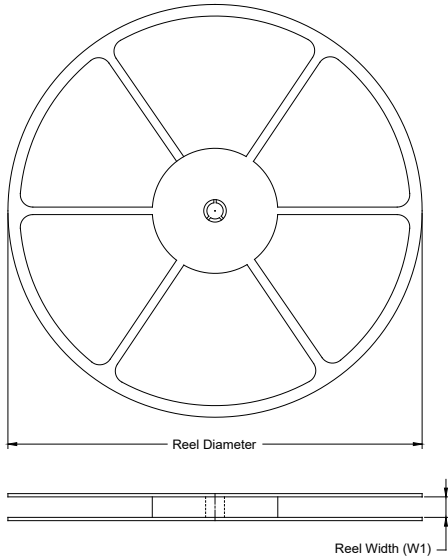

TAPE DIMENSIONS

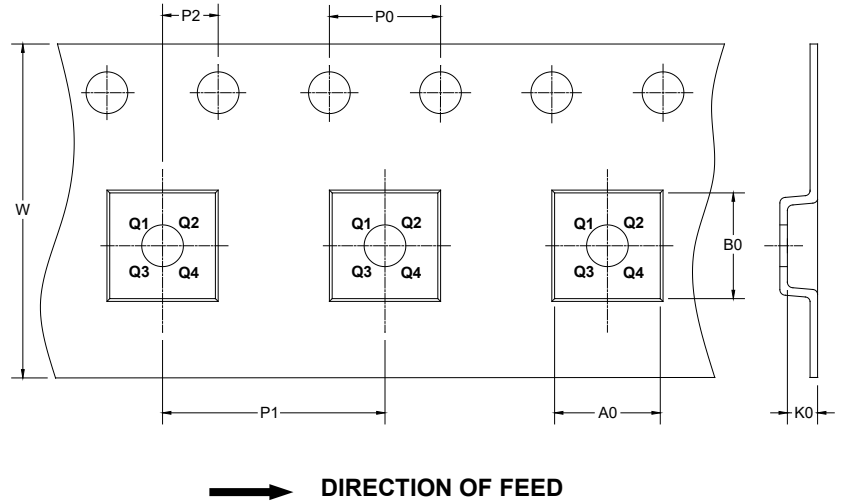

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|--------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| TDFN-2×2-6DL | 7" | 9.5 | 2.30 | 2.30 | 1.10 | 4.0 | 4.0 | 2.0 | 8.0 | Q2 |
| TDFN-3×3-8KL | 13" | 12.4 | 3.35 | 3.35 | 1.13 | 4.0 | 8.0 | 2.0 | 12.0 | Q2 |

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

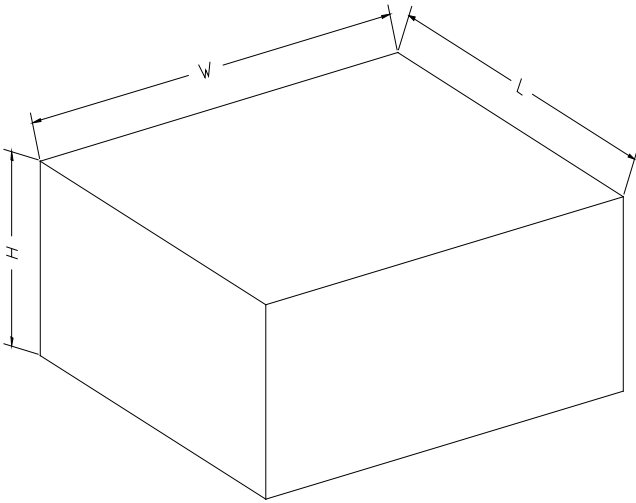

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368 | 227 | 224 | 8 |
| 7" | 442 | 410 | 224 | 18 |
| 13" | 386 | 280 | 370 | 5 |

DD0002