



SGM460XTLBM6G

Low Power, Low Supply Voltage, CSP Package, Digital Temperature Sensor

GENERAL DESCRIPTION

The SGM460XTLBM6G is an industry standard digital temperature sensor which integrates a dynamical and programmable limit window. It also features under-temperature and over-temperature alerts. And the SGM460XTLBM6G optimizes the temperature control, avoiding frequently reading temperatures from the controller or application processor.

The power supply voltage of the device is from 1.6V to 5.5V. The SMBus and two-wire interface are used to communicate with SGM460XTLBM6G. A maximum of four SGM460XTLBM6G devices are allowed on the same bus.

The SGM460XTLBM6G is ideal for plenty of applications in which thermal management is critical for performance, such as computer, environmental applications and industrial equipment, etc.

The SGM460XTLBM6G is available in a Green TLGA-2×2-6L package. It operates over an ambient temperature range of -40°C to +125°C.

FEATURES

- 1.6V to 5.5V Supply Voltage Range
- Temperature Accuracy:
 - -40°C to +125°C: $\pm 1.5^{\circ}\text{C}$ (MAX)
- Low Quiescent Current: 3.2 μA (TYP) Inactive
- Resolution: 12 Bits (0.0625°C)
- Dynamically-Programmable Limit Window
- Under-Temperature and Over-Temperature Alerts
- Available in a Green TLGA-2×2-6L Package

APPLICATIONS

Computing: SSD, Server, PC and Notebook

Industrial Equipment

Telecom Equipment

Medical Equipment

TYPICAL APPLICATION

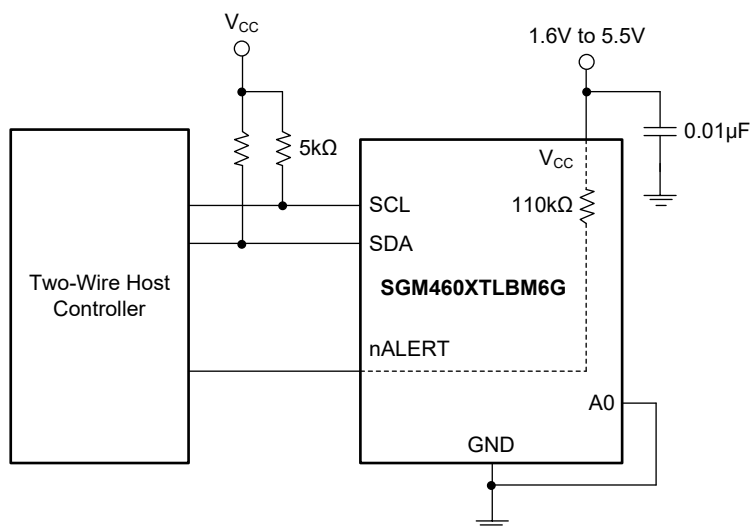


Figure 1. Typical Application Circuit

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM460XTLBM6G	TLGA-2×2-6L	-40°C to +125°C	SGM460XTLBM6G/TR	460 XXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXX = Date Code, Trace Code and Vendor Code.

YYY — Serial Number
XXXX


Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{CC} 6.5V
 Input Voltage at SCL and SDA ⁽¹⁾ -0.5V to 6.5V
 Input Voltage at A0 and nALERT
 -0.5V to $V_{CC} + 0.5V$ and $\leq 6.5V$
 Package Thermal Resistance
 TLGA-2×2-6L, θ_{JA} 164.2°C/W
 TLGA-2×2-6L, θ_{JB} 109.9°C/W
 TLGA-2×2-6L, $\theta_{JC(TOP)}$ 110.8°C/W
 TLGA-2×2-6L, $\theta_{JC(BOT)}$ 108.5°C/W
 Junction Temperature +150°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (Soldering, 10s) +260°C
 ESD Susceptibility ^{(2) (3)}
 HBM ±4000V
 CDM ±1000V

NOTES:

1. If A0 is connected to SCL or SDA, then the input voltage rating of A0 is adapted to SCL or SDA.
2. For human body model (HBM), all pins comply with ANSI/ESDA/JEDEC JS-001 specifications.
3. For charged device model (CDM), all pins comply with ANSI/ESDA/JEDEC JS-002 specifications.

RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range 1.6V to 5.5V
 Operating Ambient Temperature Range -40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

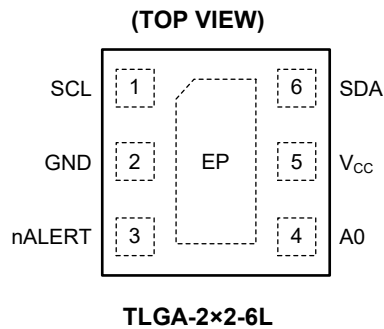

PIN DESCRIPTION

PIN	NAME	I/O	FUNCTION
1	SCL	I	Input Clock Pin. Open-drain input. Pull up to external power supply by a 5kΩ resistor.
2	GND	G	Ground.
3	nALERT	O	Alert Output Pin. Open-drain output. nALERT is internally pull-up to V _{CC} by a 110kΩ resistor.
4	A0	I	Address Selection Pin. Connect it to GND, V _{CC} , SCL or SDA to get different addresses. See Table 2 for more details.
5	V _{CC}	I	Power Supply.
6	SDA	I/O	Input/Output Data Pin. Open-drain input/output. Pull up to external power supply by a 5kΩ resistor.
Exposed Pad	EP	—	Exposed Pad.

NOTE: I = input, O = output, I/O = input/output, G = ground.

FUNCTIONAL BLOCK DIAGRAM


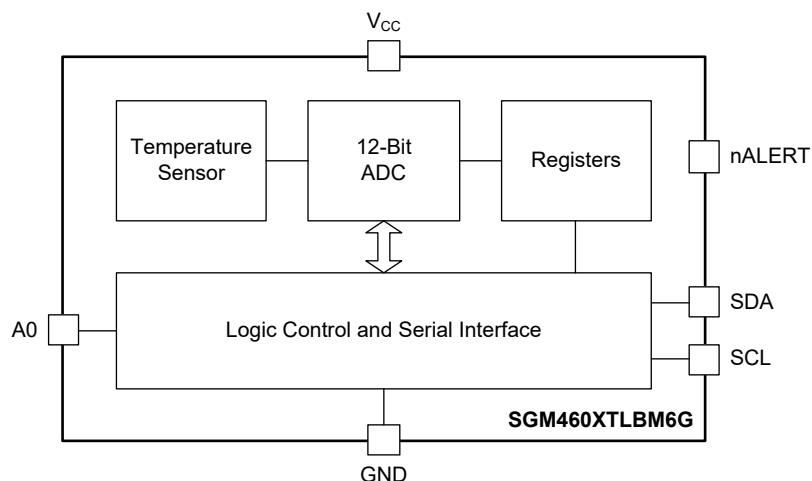



Figure 2. Block Diagram

PACKAGE OUTLINE DIMENSIONS


TLGA-2×2-6L

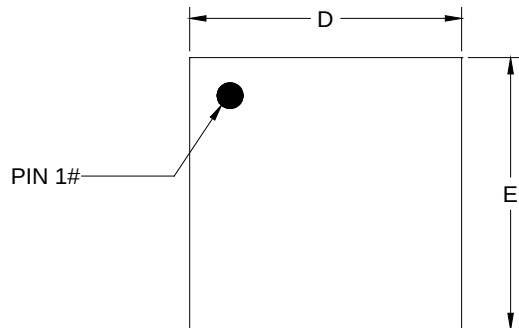


TOP VIEW

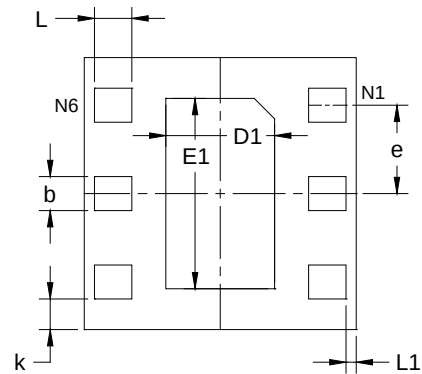

BOTTOM VIEW

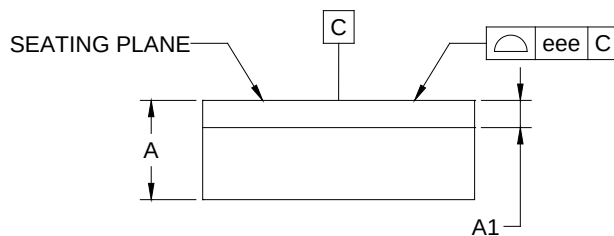

SIDE VIEW

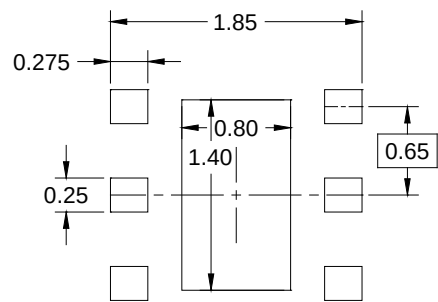


RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.680	-	0.780
A1	0.200 REF		
b	0.200	-	0.300
D	1.900	-	2.100
D1	0.700	-	0.900
E	1.900	-	2.100
E1	1.300	-	1.500
e	0.650 BSC		
k	0.225 REF		
L	0.225	-	0.325
L1	0.075 REF		
eee	0.100		


NOTE: This drawing is subject to change without notice.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

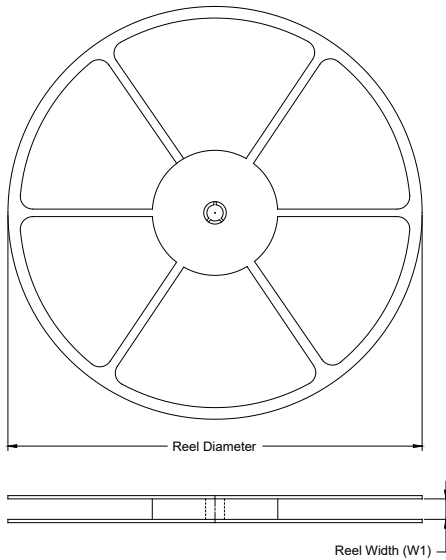

TAPE DIMENSIONS

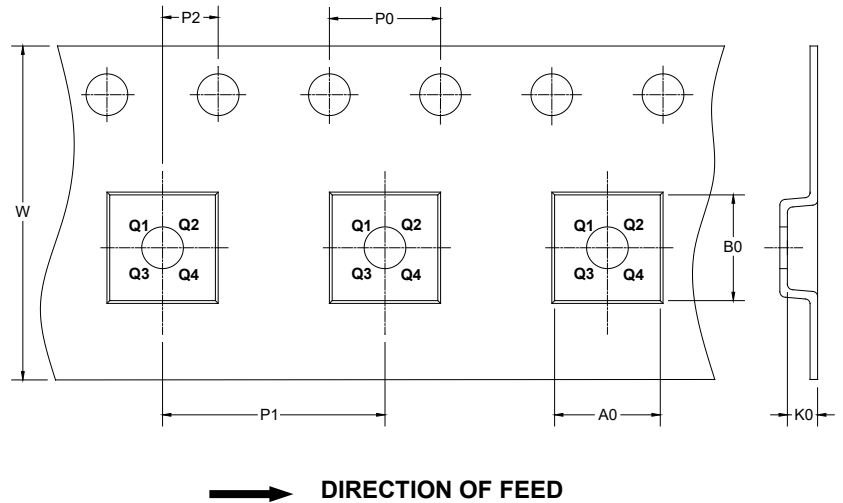

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TLGA-2×2-6L	7"	9.5	2.30	2.30	1.00	4.0	4.0	2.0	8.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

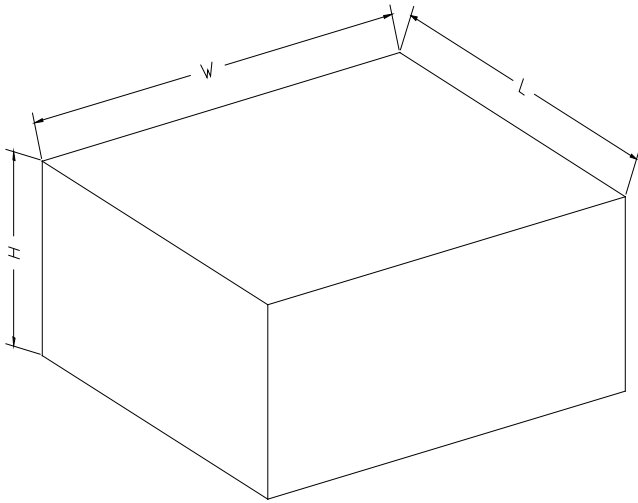

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002