

GENERAL DESCRIPTION

The SGM42622 is a low voltage stepper motor driver with control logic and low $R_{DS(on)}$ MOSFET power stages all integrated in a small TQFN package.

This device uses fixed off-time PWM current control for two independent H-bridges and is capable for fine microstepping resolution up to 1/256. Aimed for battery-powered applications, it can go to near zero-power standby mode for increased battery life.

A full set of protection features are provided including over-current, short-circuit, and thermal shutdown.

The SGM42622 is available in a Green TQFN-3×3-16L package. It operates over an ambient temperature range of -40°C to +85°C.

FEATURES

- **Motor Power Supply Voltage Range: 1.8V to 10V**
- **1.3A Maximum RMS Output Current**
- **Low $R_{DS(on)}$: 0.5Ω (HS + LS) at +25°C**
- **Up to 1/256 Microstepping Resolution**
- **Adaptive Mixed Current Decay Modes**
- **Programmable Off-Time**
- **Full Set of Protections**
 - ♦ **Lossless Over-Current Protection**
 - ♦ **Short-Circuit Protection**
 - ♦ **Thermal Shutdown**
- **Less than 80nA Standby Current for Long Battery Life**
- **-40°C to +85°C Operating Temperature Range**
- **Available in a Green TQFN-3×3-16L Package**

APPLICATIONS

Toys
Gaming Machines
Robotics
Point of Sale Devices
Printers

TYPICAL APPLICATION

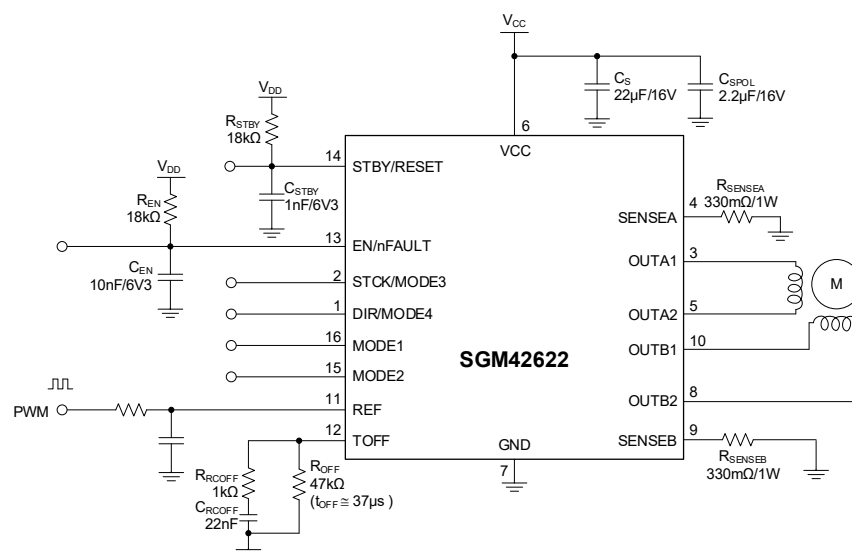


Figure 1. Typical Application Circuit


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM42622	TQFN-3×3-16L	-40°C to +85°C	SGM42622YTQ16G/TR	42622TQ XXXXX	Tape and Reel, 4000

MARKING INFORMATION

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

XXXXX



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{CC}	-0.3V to 11V
Logic Input Voltage	-0.3V to 5.5V
Output-to-Sense Voltage Drop, $V_{OUT} - V_{SENSE}$	11V
Supply-to-Output Voltage Drop, $V_{CC} - V_{OUT}$	11V
Sense Pin Voltage, V_{SENSE}	-1V to 1V
Input Reference Voltage, V_{REF}	-0.3V to 1V
Continuous Power Stage Output Current (Each Bridge)	
$I_{OUT, RMS}$	1.3A _{RMS}
Power Dissipation, P_D @ $T_A = +25^\circ\text{C}$	
TQFN-3×3-16L.....	1.5W
Junction Temperature	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10s)	+260°C
ESD Susceptibility	
HBM.....	4000V
CDM	1000V

RECOMMENDED OPERATING CONDITIONS

Supply Voltage, V_{CC}	1.8V to 10V
Logic Input Voltage	0V to 5V
Input Reference Voltage, V_{REF}	0.1V to 0.5V
Logic Inputs Positive/Negative Pulse Width, t_{INW}	> 300ns
Operating Temperature Range	-40°C to +85°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

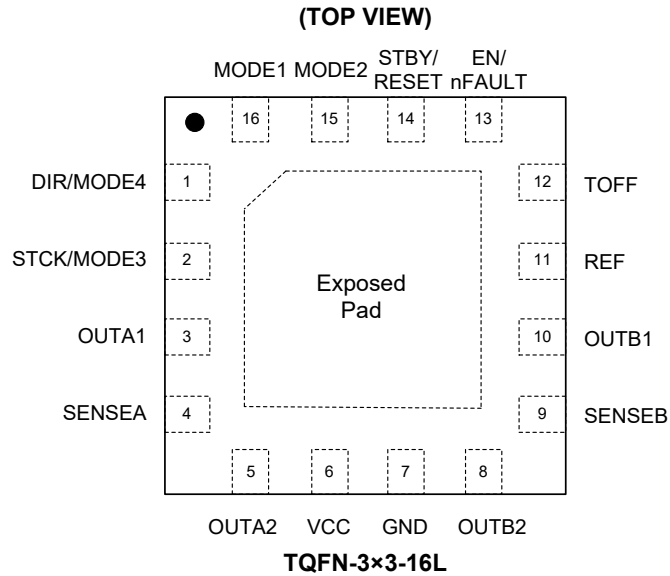

PIN DESCRIPTION

PIN	NAME	TYPE	FUNCTION
1	DIR/MODE4	I	Direction Input or Step Mode Selection Input 4.
2	STCK/MODE3	I	Step Clock Input or Step Mode Selection Input 3.
3	OUTA1	O	Bridge A Output 1.
4	SENSEA	O	Bridge A I_{SENSE} (GND). Connect with a small sensing resistor to power ground.
5	OUTA2	O	Bridge A Output 2.
6	VCC	-	Device Supply Voltage.
7	GND	G	Device Ground.
8	OUTB2	O	Bridge B Output 2.
9	SENSEB	O	Bridge B I_{SENSE} (GND). Connect with a small sensing resistor to power ground.
10	OUTB1	O	Bridge B Output 1.
11	REF	I	Current Set Reference Voltage Input.
12	TOFF	I	Internal Oscillator Frequency Adjustment.
13	EN/nFAULT	I/OD	5V Logic-Compliant Power Stage Enable Input or Alert Output. Power stage is shutdown if it is not pulled high. This pin is also the device fault output with internal open-drain driver. If a fault occurs, it will be pulled down internally.
14	STBY/RESET	I	5V Logic-Compliant Standby Input. Device goes to low power mode if pulled low.
15	MODE2	I	Step Mode Selection Input 2.
16	MODE1	I	Step Mode Selection Input 1.
Exposed Pad	GND	G	Device Ground.

NOTE: Directions: I = input, O = output, OD = open-drain output, I/O = input/output, G = ground.

FUNCTIONAL BLOCK DIAGRAM


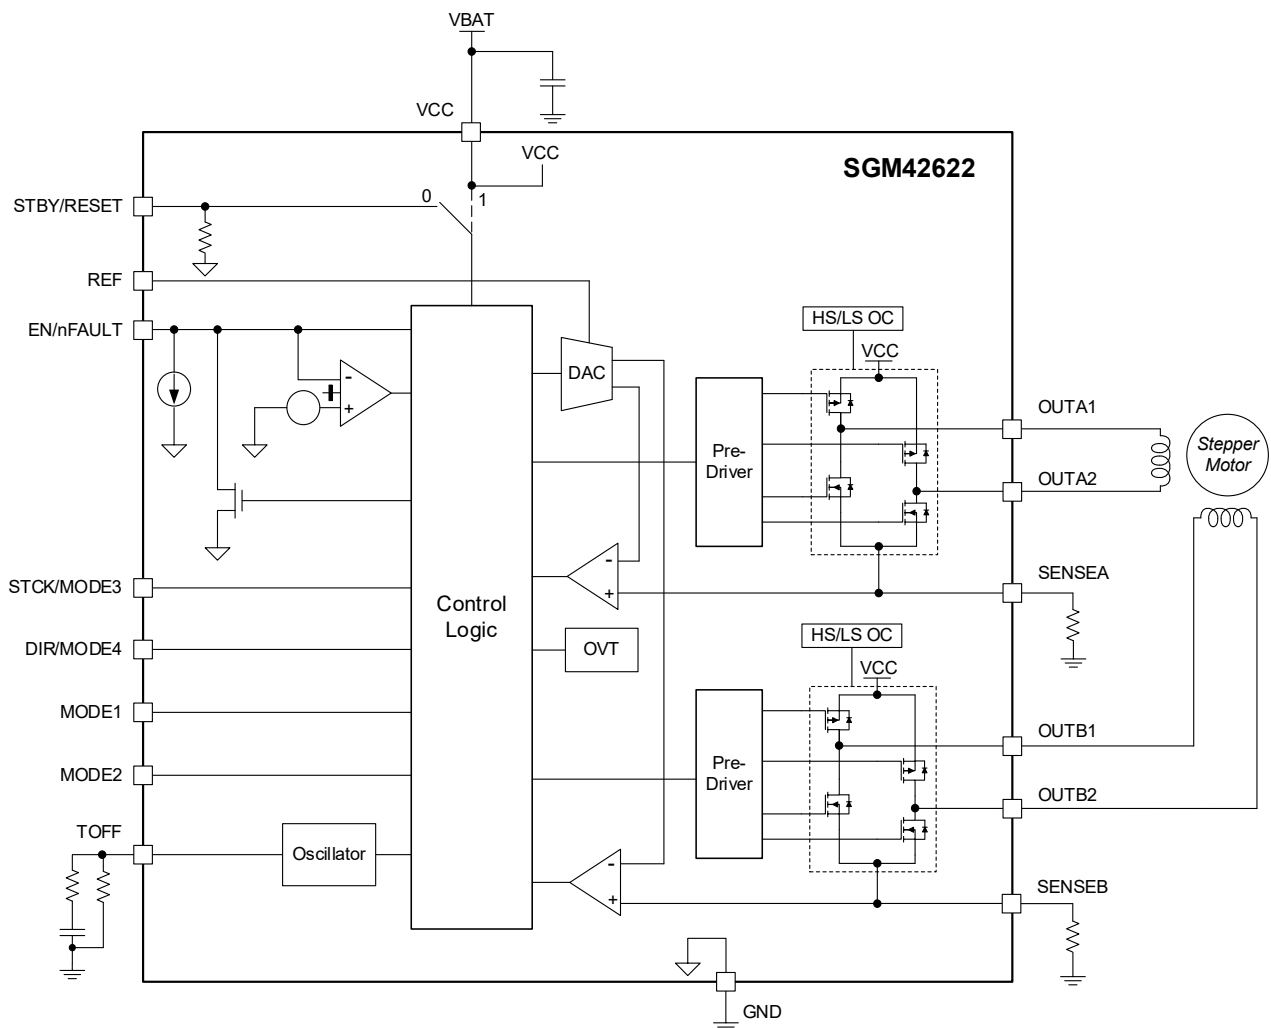



Figure 3. Block Diagram

PACKAGE OUTLINE DIMENSIONS


TQFN-3×3-16L




TOP VIEW

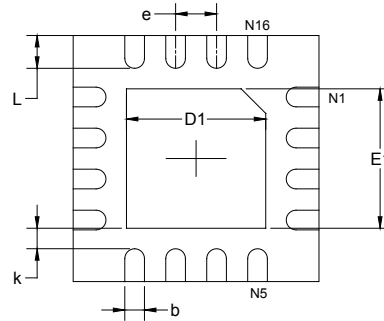

BOTTOM VIEW

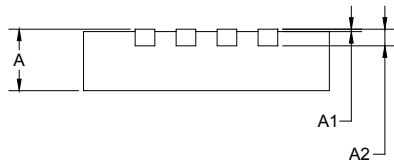

SIDE VIEW

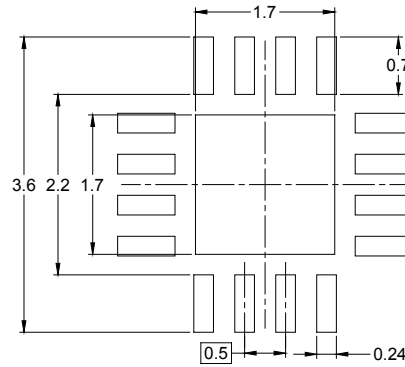


RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203 REF		0.008 REF	
D	2.900	3.100	0.114	0.122
D1	1.600	1.800	0.063	0.071
E	2.900	3.100	0.114	0.122
E1	1.600	1.800	0.063	0.071
k	0.200 MIN		0.008 MIN	
b	0.180	0.300	0.007	0.012
e	0.500 TYP		0.020 TYP	
L	0.300	0.500	0.012	0.020


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

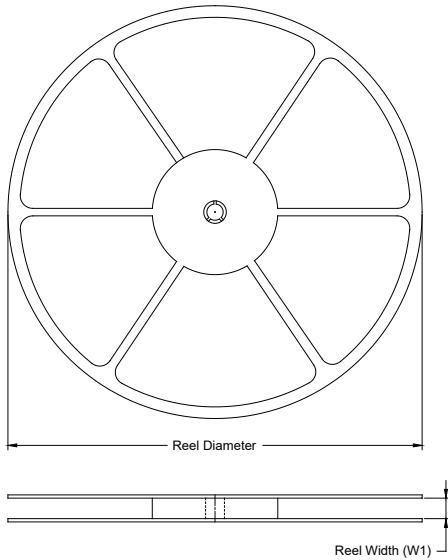

TAPE DIMENSIONS

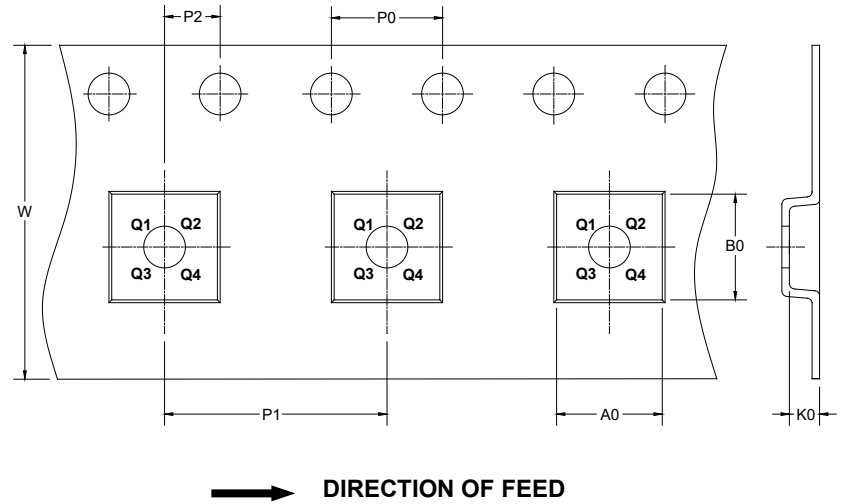

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TQFN-3×3-16L	13"	12.4	3.35	3.35	1.13	4.0	8.0	2.0	12.0	Q2

DD00001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

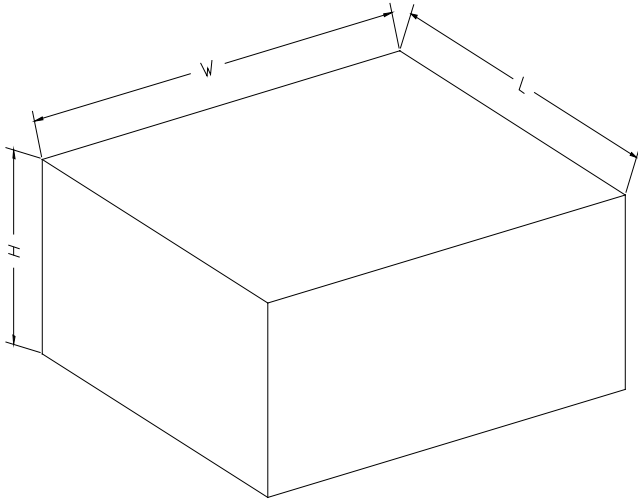

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002