TD25C640-R
64-Kbit SPI Serial EEPROM

GENERAL DESCRIPTION

The TD25C640-R is a serial EEPROM device accessed through the SPI bus. The device is designed to operate in a supply voltage range of 1.7V to 5.5V, with a maximum of 20MHz transfer rate. The operating temperature range is from -40℃ to +105℃.

The serial EEPROM memory is organized as 256 pages of 32 bytes each, totaling 8192 × 8 bits. The data integrity is significantly improved with an embedded Error Correction Code (ECC) logic. The device offers an additional 32-byte Identification Page for users to store sensitive application parameters. This page can be permanently locked in Read-only mode after the application data is written into the Identification Page. The device also offers a separate memory block containing a factory programmed 128-bit Unique ID. This block is in Read-only mode and can be accessed by sending a specific Read command.

The TD25C640-R is delivered in Lead-free green packages: SOIC-8, TSSOP-8, UTDFN-2×3-8AL and MSOP-8.

FEATURES


- **Supply Voltage Range: 1.7V to 5.5V**
- **Serial Peripheral Interface (SPI) Compatible**
  - **SPI Modes 0 (0, 0) and 3 (1, 1) Supported**
- **High Speed Clock: 20MHz**
- **Byte and Page (up to 32 Bytes) Write Mode**
- **Self-Timed Write Cycle (3ms MAX)**
- **Block Write Protection**
  - **Quarter, Half or Whole Memory Array**
- **Additional 32-byte Write Lockable Page and 128-bit Unique ID**
- **Transparent On-chip ECC**
  - **One Bit Error Correction on Each Group of Four Bytes**
- **High Reliability**
  - **Endurance: 1,000,000 Write Cycles at T_A = +25℃**
  - **Data Retention: 100 Years at T_A = +25℃**
  - **ESD Protection (HBM): 6000V**
- **Operating Temperature Range: -40℃ to +105℃**
- **RoHS Compliant and Halogen Free**
- **Available in Green SOIC-8, TSSOP-8, UTDFN-2×3-8AL and MSOP-8 Packages**

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
TD25C640-R	SOIC-8	-40℃ to +105℃	TD25C640-SLPTR	TD 5640-SLP YYWW	Tape and Reel, 4000
	TSSOP-8	-40℃ to +105℃	TD25C640-TLPTR	TD 5640-TLP YYWW	Tape and Reel, 5000
	UTDFN-2×3-8AL	-40℃ to +105℃	TD25C640-ULPTR	TD5640ULP YYWW	Tape and Reel, 3000
	MSOP-8	-40℃ to +105℃	TD25C640-MLPTR	TD 5640-MLP YYWW	Tape and Reel, 5000


MARKING INFORMATION

SOIC-8




TD: SGMICRO Logo
5640-SLP: TD25C640-SLP
YYWW: Date Code,
YY = year, WW = week
Example: 2140 = year 2021 and week 40

TSSOP-8




TD: SGMICRO Logo
5640-TLP: TD25C640-TLP
YYWW: Date Code,
YY = year, WW = week
Example: 2140 = year 2021 and week 40

UTDFN-2×3-8AL



TD: SGMICRO Logo
5640ULP: TD25C640-ULP
YYWW: Date Code,
YY = year, WW = week
Example: 2140 = year 2021 and week 40

MSOP-8



TD: SGMICRO Logo
5640-MLP: TD25C640-MLP
YYWW: Date Code,
YY = year, WW = week
Example: 2140 = year 2021 and week 40

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, V_{CC} ..... -0.5V to 6.0V
Output Voltage .....-0.5V to V_{CC} + 0.5V
Input Voltage..... -0.5V to 6.0V
DC Output Current.....5mA
Ambient Temperature with Power Applied ... -55℃ to +130℃
Storage Temperature Range ..... -65℃ to +150℃
ESD Susceptibility
HBM.....6000V

RECOMMENDED OPERATING CONDITIONS

Operating Ambient Temperature Range.....-40℃ to +105℃

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION


This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


PIN CONFIGURATIONS

(TOP VIEW)

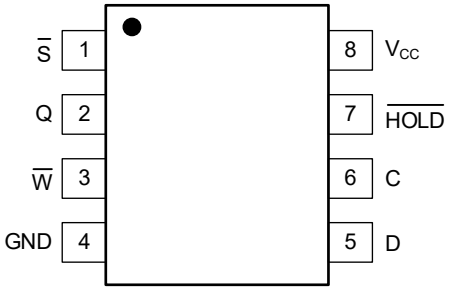

SOIC-8/TSSOP-8/MSOP-8

(TOP VIEW)

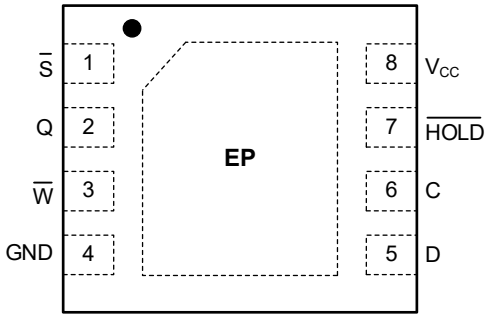

UTDFN-2×3-8AL

PIN DESCRIPTION

SYMBOL	TYPE	NAME AND FUNCTION
C	Input	Serial Clock. This input signal provides the timing of the serial interface. Instructions, addresses, or data present at Serial Data Input (D) are latched on the rising edge of Serial Clock (C). Data on Serial Data Output (Q) change from the falling edge of Serial Clock (C).
D	Input	Serial Data Input. This input signal is used to transfer data serially into the device. It receives instructions, addresses, and the data to be written. Values latched on the rising edge of Serial Clock (C).
Q	Output	Serial Data Output. This output signal is used to transfer data serially out of the device. Data is shifted out on the falling edge of Serial Clock (C).
$\overline{S}$	Input	Chip Select. When this input signal is high, the device is deselected and Serial Data Output (Q) is at high impedance. The device is in the Standby mode, unless an internal Write cycle is in progress. Driving Chip Select ($\overline{S}$) low selects the device, placing it in the Active mode. After power-up, a falling edge on Chip Select ($\overline{S}$) is required prior to the start of any instruction.
$\overline{W}$	Input	Write Protect. This input pin is used to freeze the size of the area of memory that is protected against write instructions. This pin must be driven either high or low, and must be stable during all Write instructions.
$\overline{HOLD}$	Input	Hold. This input signal is used to pause any serial communications with the device without deselecting the device. During the Hold condition, the Serial Data Output (Q) is high impedance, and Serial Data Input (D) and Serial Clock (C) are Don't Care. To start the Hold condition, the device must be selected, with Chip Select ($\overline{S}$) driven low.
V_{CC}	Power	Device Power Supply. The V_{CC} pin is used to supply the source voltage to the device. Operations at invalid V_{CC} voltages may produce spurious results and should not be attempted.
GND	Ground	Ground: The ground reference for the device power supply (V_{CC}). GND should be connected to the system ground.

ELECTRICAL CHARACTERISTICS

DC Characteristics

(Operating range: T_A = -40℃ to +105℃, V_{CC} = 1.7V to 5.5V, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	MAX	UNITS
Supply Voltage	V_{CC}		1.7	5.5	V
Supply Current (Read)	I_{CC1}	V_{CC} = 1.7V at 5MHz, Q = open		1.0	mA
		V_{CC} = 2.5V at 10MHz, Q = open		5.0	
		V_{CC} = 5.5V at 20MHz, Q = open		10	
Supply Current (Write)	I_{CC2}	During t_{WC}, $\overline{S}$ = V_{CC}, V_{CC} = 1.7V		1.0	mA
		During t_{WC}, $\overline{S}$ = V_{CC}, V_{CC} = 5.5V		2.0	
Standby Current	I_{SB}	$\overline{S}$ = V_{CC}, V_{CC} = 1.7V		0.5	μA
		$\overline{S}$ = V_{CC}, V_{CC} = 5.5V		1.0	
Input Leakage Current	I_{LI}	V_{IN} = V_{CC} or GND		1.0	μA
Output Leakage Current	I_{LO}	$\overline{S}$ = V_{CC}, V_{OUT} = V_{CC} or GND		1.0	μA
Input Low Voltage	V_{IL}	1.7V ≤ V_{CC} < 2.5V	-0.45	0.25 × V_{CC}	V
		2.5V ≤ V_{CC} < 5.5V	-0.45	0.3 × V_{CC}	
Input High Voltage	V_{IH}	1.7V ≤ V_{CC} < 2.5V	0.75 × V_{CC}	V_{CC} + 1	V
		2.5V ≤ V_{CC} < 5.5V	0.7 × V_{CC}	V_{CC} + 1	
Output Low Voltage	V_{OL}	V_{CC} = 1.7V, I_{OL} = 0.15mA		0.2	V
		V_{CC} = 2.5V, I_{OL} = 1.5mA or V_{CC} = 5V, I_{OL} = 2mA		0.4	
Output High Voltage	V_{OH}	V_{CC} = 1.7V, I_{OH} = -0.1mA	V_{CC} - 0.2		V
		V_{CC} = 2.5V, I_{OH} = -0.4mA or V_{CC} = 5V, I_{OH} = -2mA	V_{CC} - 0.8		

ELECTRICAL CHARACTERISTICS (continued)

AC Characteristics

(Operating range: T_A = -40℃ to +105℃, V_{CC} = 1.7V to 5.5V, C_L = 50pF. Measurement conditions: input rise and fall time ≤ 50ns, input pulse voltages: 0.2 × V_{CC} to 0.8 × V_{CC}; input and output timing reference voltages: 0.3 × V_{CC} to 0.7 × V_{CC}, unless otherwise noted.)

PARAMETER	SYMBOL	V_{CC} = 1.7V to 5.5V		V_{CC} = 2.5V to 5.5V		V_{CC} = 4.5V to 5.5V		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	
Clock Frequency, SCL	f_{SCL}		5		10		20	MHz
Clock Pulse Width Low	t_{LOW}	80		40		20		ns
Clock Pulse Width High	t_{HIGH}	80		40		20		ns
SDA Rise Time	t_R (1)		80		40		15	ns
SDA (Out) Fall Time	t_F (1)		80		40		15	ns
$\overline{S}$ High Time	t_{CS}	60		40		25		ns
$\overline{S}$ Active Setup Time	t_{CSLS}	60		30		20		ns
$\overline{S}$ Active Hold Time	t_{CSLH}	60		30		20		ns
$\overline{S}$ Not Active Setup Time	t_{CSHS}	60		30		20		ns
$\overline{S}$ Not Active Hold Time	t_{CSHH}	60		30		20		ns
Data In Setup Time	t_{SU}	20		10		5		ns
Data In Hold Time	t_{HD}	20		10		5		ns
Clock Low to Output Valid	t_V		80		40		20	ns
Output Hold Time	t_{HO}	0		0		0		ns
Output Disable Time	t_{DIS}		100		50		25	ns
Output Rise Time	t_{RO} (1)	80		40		20		ns
Output Fall Time	t_{FO} (1)	80		40		20		ns
$\overline{HOLD}$ Setup Time	t_{SUHD}	20		10		5		ns
$\overline{HOLD}$ Hold Time	t_{HDHD}	20		10		5		ns
$\overline{HOLD}$ to Output Low-Z	t_{LZ}	0	100	0	50	0	25	ns
$\overline{HOLD}$ to Output High-Z	t_{HZ}		100		50		25	ns
Write Cycle Time	t_{WR}		3		3		3	ms

NOTE: 1. This parameter is ensured by characterization only.

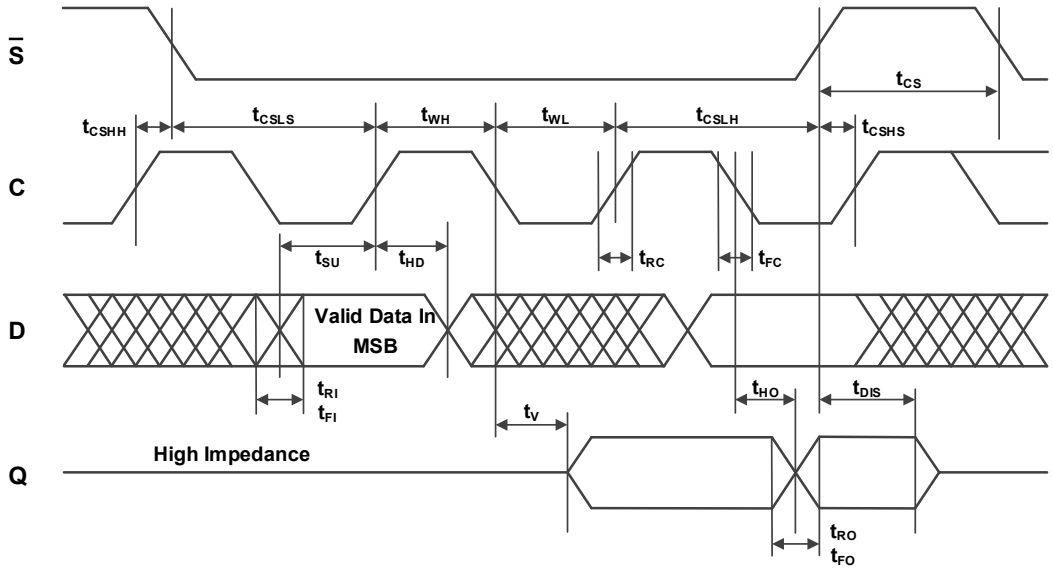


Figure 1. Serial Input/Output Timing

ELECTRICAL CHARACTERISTICS (continued)

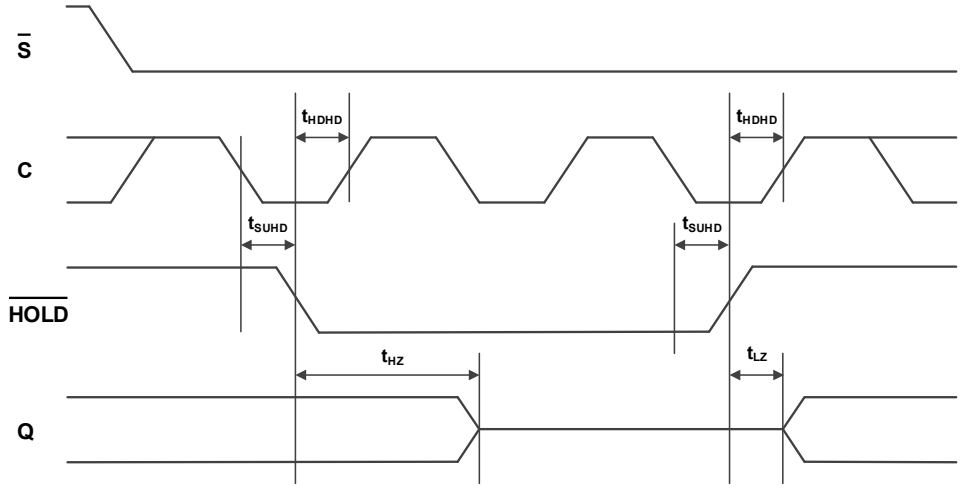


Figure 2. Hold Condition Timing

Pin Capacitance

(Operating range for pin capacitance: T_A = +25℃, f_C = 5MHz, V_{CC} = 1.7V to 5.5V, unless otherwise noted.)

PARAMETER (1)	SYMBOL	CONDITIONS	MAX	UNITS
Output Capacitance (Q)	C_{OUT} (1)	V_{OUT} = 0V	8	pF
Input Capacitance (D)	C_{IN} (1)	V_{IN} = 0V	8	pF
Input Capacitance (Other Pins)	C_{IN} (1)	V_{IN} = 0V	6	pF

NOTE: 1. These parameters are ensured by characterization only.

Reliability Characteristics

PARAMETER	SYMBOL	CONDITIONS	MIN	UNITS
Write Cycle Endurance (1)	N_W	T_A = +25℃	1×10^6	cycle
		T_A = +105℃	1×10^5	
Data Retention	D_R	T_A = +25℃	100	year

NOTE: 1. The write cycle endurance is defined for group of four bytes located at addresses [4 × N, 4 × N + 1, 4 × N + 2, 4 × N + 3], where N is an integer. The Write cycle endurance is defined by characterization and qualification.

FUNCTIONAL BLOCK DIAGRAM

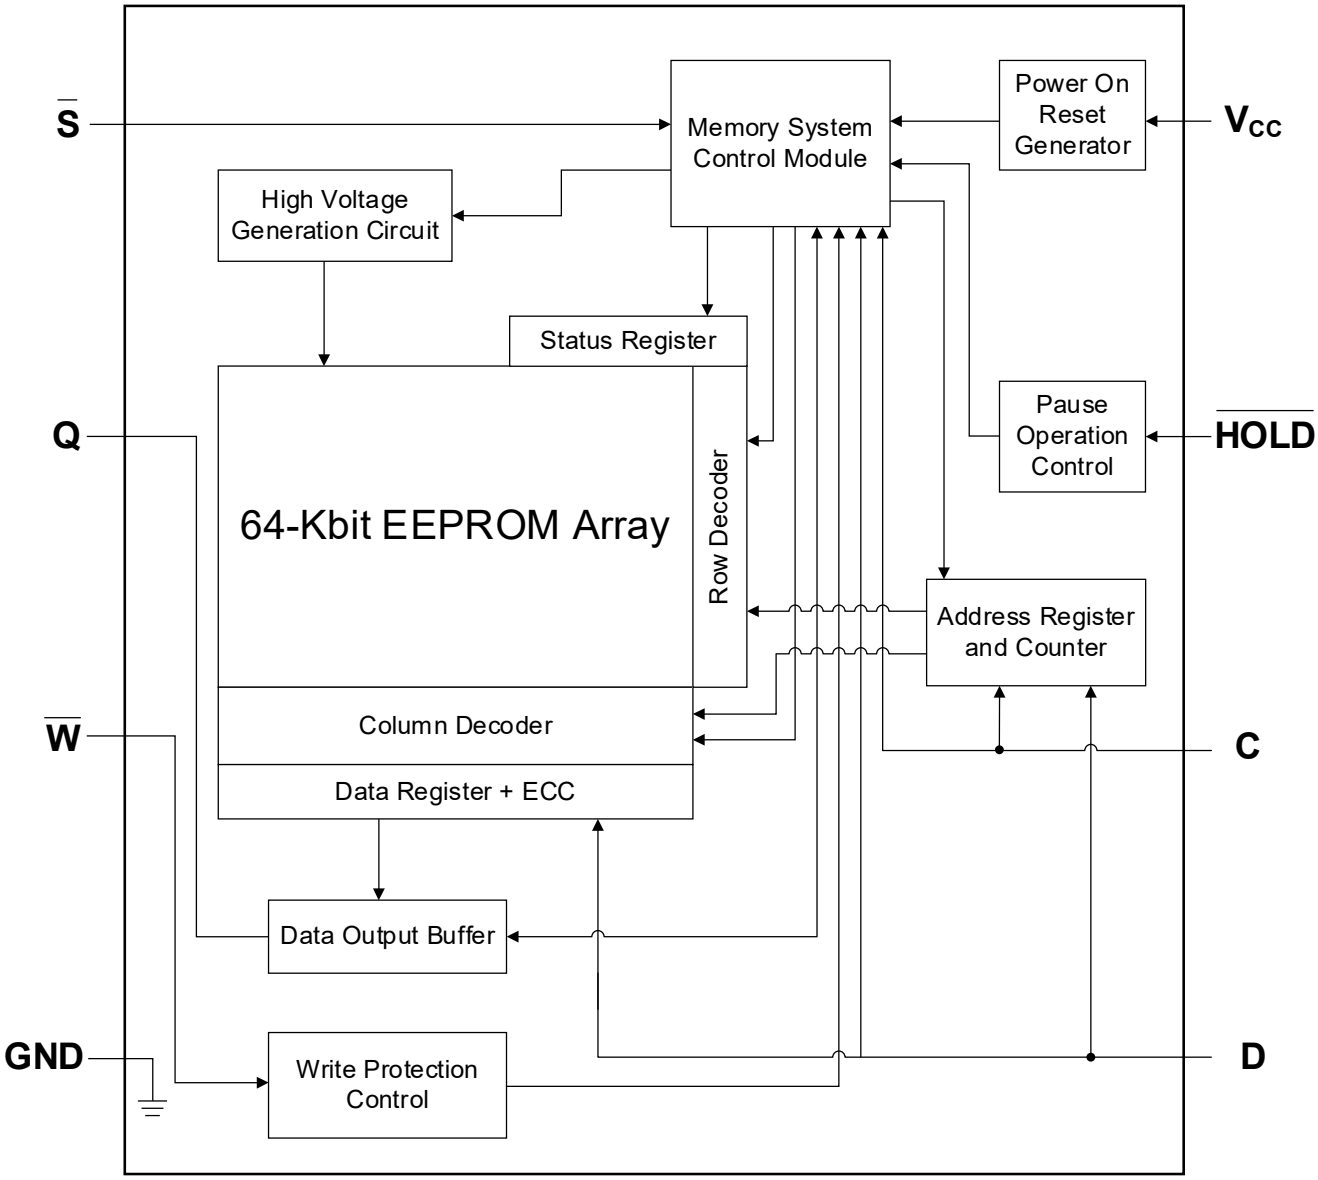


Figure 3. Functional Block Diagram

DEVICE COMMUNICATION

SPI Mode

The TD25C640-R is controlled by a set of instructions sent from a microcontroller, commonly referred to as the SPI Master. The SPI Master communicates with the device via the SPI bus which is comprised of four signal lines: Chip Select ($\overline{S}$), Serial Clock (C), Serial Data Input (D) and Serial Data Output (Q).

The SPI protocol defines a total of four modes of operation (Mode 0, 1, 2 or 3) with each mode differing in respect to Serial Clock (C) polarity (CPOL) and phase (CPHA) and how the polarity and phase control the flow of data on the SPI bus. The TD25C640-R supports two most common modes: SPI Mode 0 (CPOL = 0, CPHA = 0) and Mode 3 (CPOL = 1, CPHA = 1). For SPI Modes 0 and 3, input data is latched in on the rising edge of Serial Clock (C), and output data is available from the falling edge of Serial Clock (C).

The difference between the two modes is the clock polarity when the bus Master is in Standby mode and not transferring data (see Figure 4).

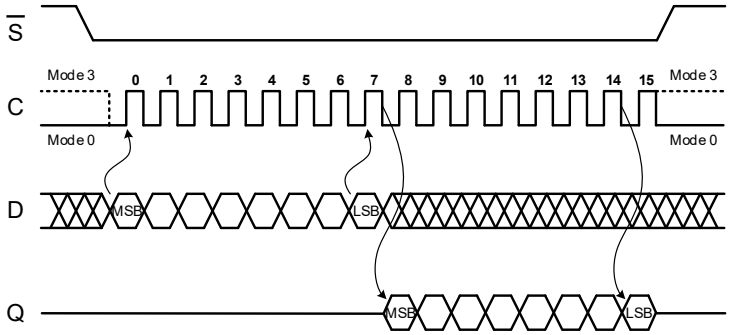


Figure 4. SPI Mode 0 and Mode 3

SPI Bus Connection

All instructions, addresses and input data bytes are shifted in to the device with most significant bit first. The Serial Data Input (D) is sampled on the first rising edge of Serial Clock (C) after Chip Select ($\overline{S}$) is driven low.

All output data bytes are shifted out of the device with most significant bit first. The Serial Data Output (Q) is latched on the first falling edge of Serial Clock (C) after an instruction has been clocked into the device.

Figure 5 shows an example of four memory devices connected to a SPI bus Master. Only one memory device is selected at a time, so only one memory device drives the Serial Data Output (Q) line at a time. The outputs of other memory devices are high impedance.

The pull-up resistor R ensures that a device is not selected if the bus Master leaves Chip Select ($\overline{S}$) line in the high impedance state.

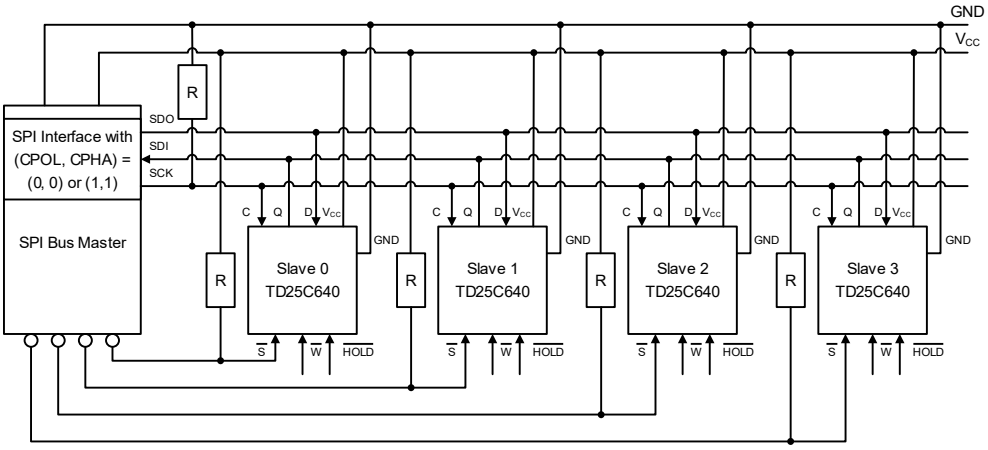


Figure 5. Bus Master and Memory Devices on SPI Bus

DEVICE COMMUNICATION (continued)

Active and Standby Mode

When Chip Select ($\overline{S}$) is low, the TD25C640-R is selected, and in the Active mode. The device consumes I_{CC}, as specified in DC characteristics (see ***DC Characteristics***).

When Chip Select ($\overline{S}$) is high, the TD25C640-R is deselected. If an internal write cycle is not currently in progress, the device then goes into the low-power Standby mode.

Device Reset and Initialization

The TD25C640-R incorporates a Power-On Reset (POR) circuit to prevent inadvertent operations during power-up. On a cold power-up, the device does not respond to any instructions until the supply voltage reaches the internal power-on reset threshold voltage (V_{POR}). The supply voltage must rise continuously between V_{POR} and V_{CC} (MIN). During this time, the Chip Select ($\overline{S}$) line is not allowed to float but should follow the V_{CC}. Therefore, it is recommended to connect the Chip Select ($\overline{S}$) line to V_{CC} via a pull-up resistor. Once the supply voltage passes V_{POR}, the device is reset and enters Standby mode. However, no protocol should be issued to the device until a valid and stable supply voltage is applied for the time specified by the t_{INIT}. The supply voltage must remain stable and valid until the end of the protocol transmission, and for a write instruction, until the end of the internal write cycle (see Figure 6).

This POR behavior is bi-directional. It protects the TD25C640-R against brown-out failure caused by a temporary loss of power. In a similar way, as soon as the supply voltage drops below the internal brown-out reset threshold voltage (V_{BOR}), the device is reset and stops responding to any instructions (see Figure 6). The V_{BOR} level is set below the V_{POR} level.

Parameters related to power-up and power-down conditions are listed in Table 1.

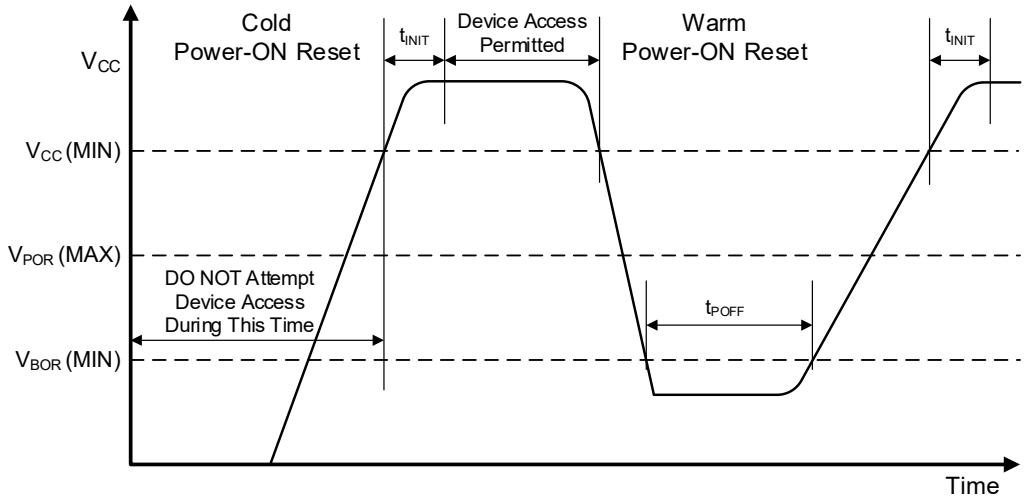


Figure 6. Power-up and Power-down Timing

Table 1. Power-up and Power-down Conditions

PARAMETER	SYMBOL	MIN	MAX	UNITS
Power-On Reset Voltage	V_{POR}		1.5	V
Brown-out Reset Voltage	V_{BOR}	1.2		V
Time from V_{CC} (MIN) to First Command	t_{INIT}	100		μs
Warm Power Cycle Off Time	t_{POFF}	100		μs

DEVICE COMMUNICATION (continued)

Hold Condition

The Hold ($\overline{HOLD}$) signal is used to pause any serial communications with the device without resetting the clocking sequence. However, the Hold condition has no effect on the internal write cycle. Therefore, if a write cycle is in progress, driving the Hold ($\overline{HOLD}$) signal low will not pause the operation and the write cycle will continue to completion.

To enter the Hold condition, the device must be selected, with Chip Select ($\overline{S}$) low. The Hold condition starts when the Hold ($\overline{HOLD}$) signal is driven low while the Serial Clock (C) is already low. If the Hold ($\overline{HOLD}$) signal is driven low during the Serial Clock (C) high pulse, then the Hold condition will not be started until the beginning of the next Serial Clock (C) low pulse.

During the Hold condition, the Serial Data Output (Q) is high impedance, and the Serial Data Input (D) and the Serial Clock (C) are Don't Care.

To end the Hold condition, the Hold ($\overline{HOLD}$) signal is driven high when the Serial Clock (C) is low. If the Hold ($\overline{HOLD}$) signal is driven high during the Serial Clock (C) high pulse, then the Hold condition will not end until the beginning of the next Serial Clock (C) low pulse (see Figure 7).

Normally, the device is kept selected for the whole duration of the Hold condition. Deselecting the device while it is in the Hold condition has the effect of resetting the state of the device.

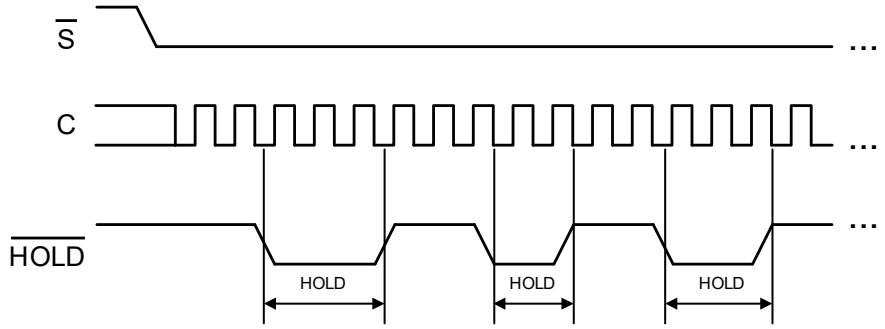


Figure 7. Hold Condition Activation

Data Protection

The TD25C640-R features the following data protection mechanisms:

- All instructions that modify data must be preceded by a Write Enable (WREN) instruction to set the Write Enable Latch (WEL) bit (see ***Write Enable (WREN)*** for details).
- The Block Protect (BP1, BP0) bits in the Status Register are used to configure part of the memory as Read-only (see ***Block Write Protection*** for details).
- The Write Protect ($\overline{W}$) signal in accordance with the Status Register Write Protect (SRWD) bit in the Status Register is used to write protect the Status Register (see ***Status Register Write Protection*** for details).

INSTRUCTIONS

Each command is composed of bytes with Most Significant Bit (MSB) transmitted first, initiated with an instruction byte, as shown in Table 2, and starts with a high-to-low Chip Select ($\overline{S}$) transition.

If an invalid instruction is sent (one not contained in Table 2), the device automatically enters a Wait state until deselected.

Table 2. Instruction Set for theTD25C640-R

INSTRUCTION NAME	OPERATION DESCRIPTION	INSTRUCTION FORMAT
WREN	Write Enable	0000 0110
WRDI	Write Disable	0000 0100
RDSR	Read Status Register	0000 0101
WRSR	Write Status Register	0000 0001
READ	Read from 64-Kbit Memory Array	0000 0011
WRITE	Write to 64-Kbit Memory Array	0000 0010
RDID	Read Identification Page	1000 0011
WRID	Write Identification Page	1000 0010
RDLS	Read Identification Page Lock Status	1000 0011
LID	Lock Identification Page in Read-only Mode	1000 0010
RDUID	Read Unique ID	1000 0001

Once the TD25C640-R has acknowledged the device address byte, the device waits for the Master to send two word address bytes (first word address byte sent first, followed by the second word address byte) for a certain Read or Write instruction according to Table 3. The TD25C640-R responds to each address byte with an ACK.

Write Enable (WREN)

The Write Enable Latch (WEL) bit must be set prior to each WRITE and WRSR instruction. The only way to do this is to send a Write Enable (WREN) instruction to the device.

To send WREN instruction to the device, Chip Select ($\overline{S}$) is first driven low, and the bits of the instruction byte (06h) are shifted in, on Serial Data Input (D) (see Figure 8). The device then enters a Wait state. It waits for the device to be deselected, by Chip Select ($\overline{S}$) being driven high.

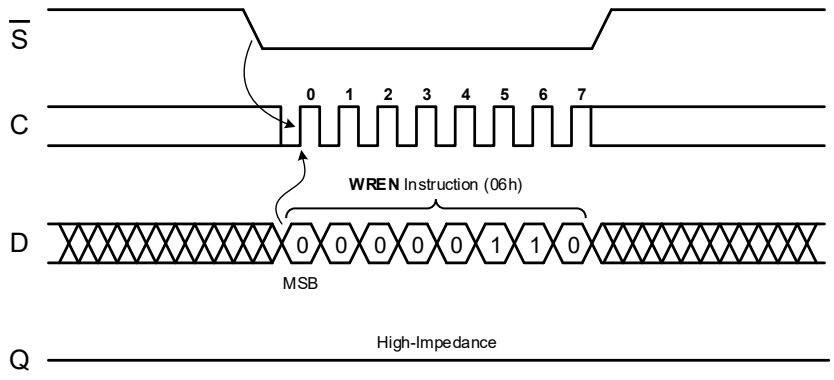


Figure 8. Write Enable

INSTRUCTIONS (continued)

Write Disable (WRDI)

One way of resetting the WEL bit is to send a Write Disable (WRDI) instruction to the device. To send a WRDI instruction to the device, Chip Select ($\overline{S}$) is first driven low, and the bits of the instruction byte (04h) are shifted in, on Serial Data Input (D) (see Figure 9). The device then enters a Wait state. It waits for the device to be deselected, by Chip Select ($\overline{S}$) being driven high.

The WEL bit is reset by any of the following events:

- Power-up;
- WRDI instruction execution;
- WRSR or WRITE (including WRID and LID) instruction completion.

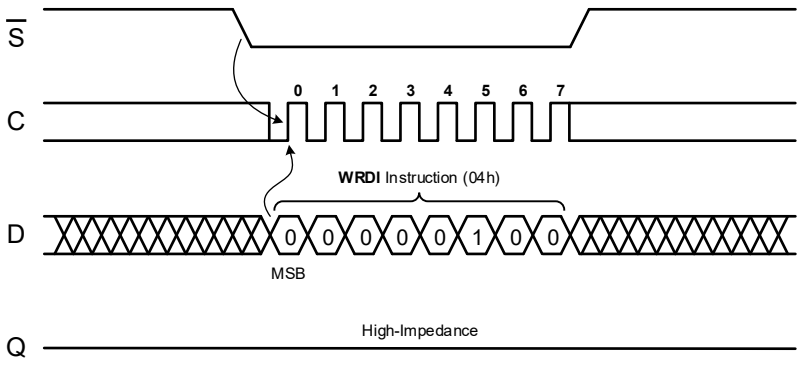


Figure 9. Write Disable

Read Status Register (RDSR)

The TD25C640-R includes an 8-bit Status Register. The Status Register bits modulate various features of the device as shown in Table 3.

Table 3. Status Register Bit Definition and Function

BITS	NAME	FUNCTION	DEFAULT	DESCRIPTION
D[7]	SRWD	Status Register Write Protect	0	Write Protect ($\overline{W}$) pin is not enabled (Initial Delivery State)
			1	Write Protect ($\overline{W}$) pin is enabled (see ***Status Register Write Protection*** for detail)
D[6:4]	RFU[2:0]	Reserved for Future Use	0	Read always as '000'
D[3]	BP1	Block Protect	00	No memory array write protection (Initial Delivery State)
			01	Quarter memory array write protection (see ***Block Write Protection*** for detail)
D[2]	BP0		10	Half memory array write protection (see ***Block Write Protection*** for detail)
			11	Whole memory array write protection (see ***Block Write Protection*** for detail)
D[1]	WEL	Write Enable Latch	0	Device is not write enabled (Power-up state)
			1	Device is write enabled
D[0]	WIP	Write In Progress	0	No write cycle is in progress, device is ready for new instruction
			1	Device is busy with an internal write cycle

The Read Status Register (RDSR) instruction is used to read the Status Register. This instruction is defined with Chip Select ($\overline{S}$) signal first driven low; the bits of the instruction byte (05h) are then shifted in on Serial Data Input (D). The device will return 8-bit Status Register value on Serial Data Output (Q). If Chip Select ($\overline{S}$) continues to be driven low, the Status Register value is shifted out continuously (see Figure 10).

INSTRUCTIONS (continued)

The RDSR instruction is terminated by driving Chip Select ($\overline{S}$) high. The rising edge of Chip Select ($\overline{S}$) can occur at any time during the cycle.

The Status Register can be read at any time, even while an internal write cycle is in progress. When a write cycle is in progress, it is recommended to check the Write In Progress (WIP) bit before sending a new instruction to the device.

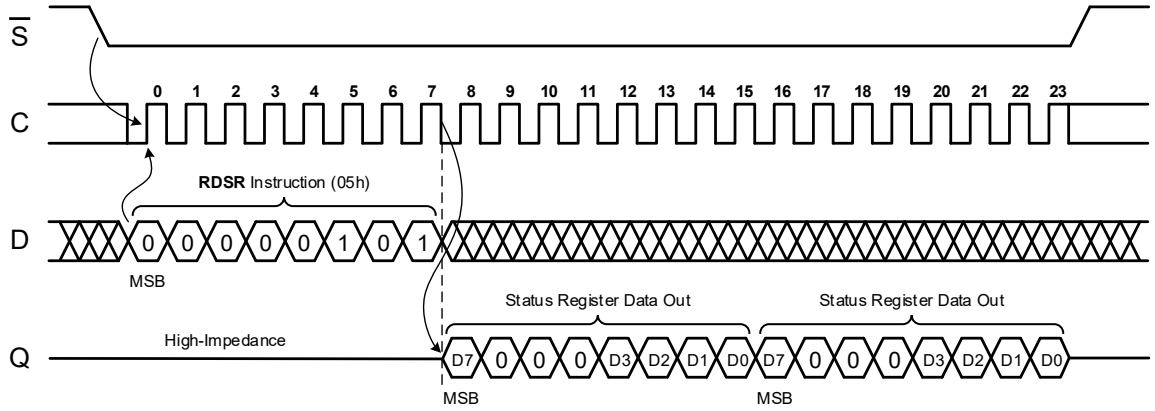



Figure 10. Read Status Register

Write Status Register (WRSR)

The Write Status Register (WRSR) instruction enables the SPI Master to change selected bits of the Status Register. Before a WRSR instruction can be initiated, a WREN instruction must be executed to set the WEL bit to Logic '1'. The WRSR instruction is achieved by driving Chip Select ($\overline{S}$) low, followed by the instruction byte (01h) and the data byte on Serial Data input (D), and then Chip Select ($\overline{S}$) driven high. Chip Select ($\overline{S}$) must be driven high after the rising edge of Serial Clock (C) that latches in the eighth bit of the data byte and before the next rising edge of Serial Clock (C) (see Figure 11). Otherwise, the WRSR instruction will not be executed.

Driving Chip Select ($\overline{S}$) signal high at a byte boundary of the input data triggers the self-timed write cycle that takes a fix time by the t_{WC} specification to complete. While the write cycle is in progress, the Status Register can still be read to check the value of the WIP bit: the WIP bit is Logic '1' during the self-timed write cycle and is Logic '0' when the write cycle is complete. The WEL bit is also reset at the end of the write cycle.

The WRSR instruction has no effect on the bit 6, bit 5, bit 4, bit 1 and bit 0 in the Status Register, but only enables the user to change the values of the SRWD, BP1 and BP0 bits. These three bits are non-volatile bits that have the same properties and functions as regular EEPROM cells.

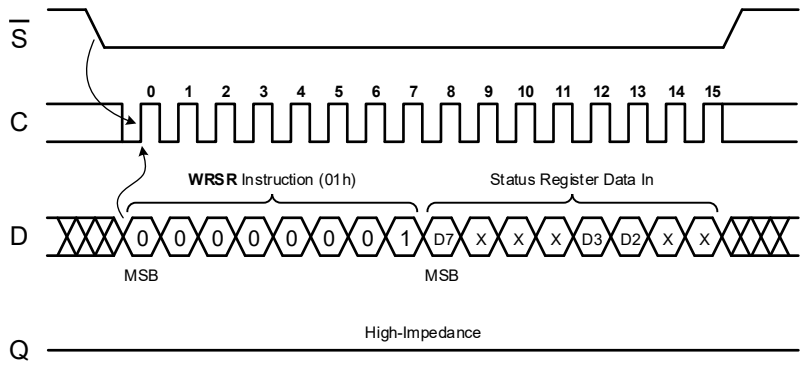

X = Bit is Don't Care

Figure 11. Write Status Register

INSTRUCTIONS (continued)

Block Write Protection

The WRSR instruction allows the user to selectively write-protect the memory array by blocks through changing the Block Protect bits (BP1, BP0). The Write-Protected Block size and the corresponding Status Register control bits are shown in Table 4.

Table 4. Write-Protected Block Size

STATUS REGISTER BITS		PROTECTED BLOCK	PROTECTED ADDRESS RANGE
BP1	BP0		TD25C640-R
0	0	None	None
0	1	Upper Quarter	1800h to 1FFFh
1	0	Upper Half	1000h to 1FFFh
1	1	Whole Memory	0000h to 1FFFh (and Identification Page)

Status Register Write Protection

The WRSR instruction allows the user to set or reset the Write Protection mode of the Status Register itself through changing the Status Register Write Protect (SRWD) bit in accordance with the state of Write Protect ($\overline{W}$) pin.

When the SRWD bit is Logic '0', it is possible to write to the Status Register (provided that the WEL bit has previously been set by a WREN instruction), regardless of the state of Write Protect ($\overline{W}$) pin. When the SRWD bit is set to Logic '1', two cases depending on the state of the Write Protect ($\overline{W}$) pin:

- If Write Protect ($\overline{W}$) is driven high, it is possible to write to the Status Register (provided that the WEL bit has previously been set by a WREN instruction).
- If Write Protect ($\overline{W}$) is driven low, it is not possible to write to the Status Register even if the WEL bit has previously been set by a WREN instruction. As a result, all the data bytes in the memory area, which are write-protected by the Block Protect (BP1, BP0) bits in the Status Register, are also Hardware-protected against data modification.

Regardless of the order of the two cases, the Hardware-protected mode can be entered by: either setting the SRWD bit after driving the Write Protect ($\overline{W}$) pin low, or driving the Write Protect ($\overline{W}$) pin low after setting the SRWD bit. Once the Hardware-protected mode has been entered, the only way of exiting it is to pull high the Write Protect ($\overline{W}$) pin. If the Write Protect ($\overline{W}$) pin has been permanently tied high, the Hardware-protected mode can never be activated.

The protection features of the device are summarized in Table 5.

Table 5. SRWD Protection Modes

SRWD BIT	$\overline{W}$ PIN	WEL BIT	STATUS REGISTER	PROTECTED BLOCK	UNPROTECTED BLOCK
0	X	0	Protected	Protected	Protected
0	X	1	Writable	Protected	Writable
1	LOW	0	Protected	Protected	Protected
1	LOW	1	Protected	Protected	Writable
X	HIGH	0	Protected	Protected	Protected
X	HIGH	1	Writable	Protected	Writable

NOTE: X = Don't Care State.

INSTRUCTIONS (continued)

Read from Memory Array (READ)

Reading the TD25C640-R memory array is achieved with the Read from Memory Array (READ) instruction. To send the READ instruction, Chip Select ($\overline{S}$) signal is first driven low; the bits of the instruction byte (03h) and two address bytes are then shifted in, on Serial Data Input (D). For the 64-Kbit memory array, address bits A12:A0 are significant address bits and A15:A13 are Don't Care bits. The address is loaded into an internal address counter, and the byte of data at the address is shifted out, on Serial Data Output (Q). If Chip Select ($\overline{S}$) continues to be driven low, the address counter is incremented automatically, and the byte of data at the new address is shifted out (see Figure 12). When the highest address is reached, the address counter will rollover to the lowest address, allowing the read cycle to be continued. Therefore, the whole memory can be read with a single READ instruction.

The read cycle is terminated by driving Chip Select ($\overline{S}$) high. The rising edge of Chip Select ($\overline{S}$) can occur at any time during the cycle.

The READ instruction is not accepted, and is not executed, if a write cycle is currently in progress.

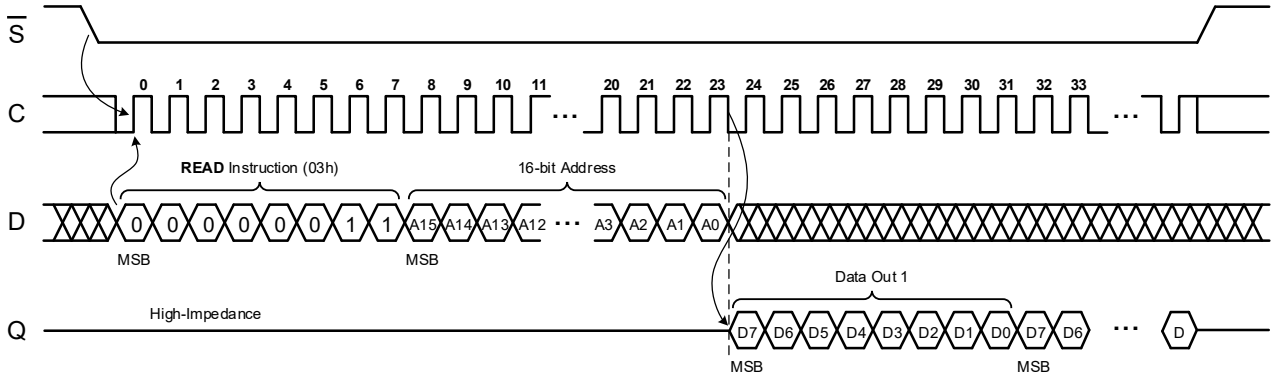


Figure 12. Read from Memory Array

Write to Memory Array (WRITE)

In order to program the TD25C640-R 64-Kbit memory array, two separate instructions must be executed. First, a WREN instruction must be executed to set the device to be write enable. Then, one of the two possible write sequences described below may be executed. The device will ignore the WRITE instruction if the device is not write enable, and return to the Standby mode when Chip Select ($\overline{S}$) is driven high.

Byte Write

A byte write instruction is issued by driving Chip Select ($\overline{S}$) low first, sending the WRITE instruction (02h), the address bytes and a data byte on Serial Data Input (D), and then driving Chip Select ($\overline{S}$) high. For the 64-Kbit memory array, address bits A12:A0 are significant address bits and A15:A13 are Don't Care bits. Chip Select ($\overline{S}$) must be driven high after the rising edge of Serial Clock (C) that latches in the eighth bit of the data byte, and before the next rising edge of Serial Clock (C) (see Figure 13).

If the addressed page is not in the region protected by the Block Protect (BP1, BP0) bits, driving Chip Select ($\overline{S}$) high at a byte boundary of the input data triggers the self-timed write cycle, which continues for a fix time by the t_{WC} specification. The TD25C640-R will automatically return to the Write Disable state (WEL = 0) at the completion of a write cycle.

INSTRUCTIONS (continued)

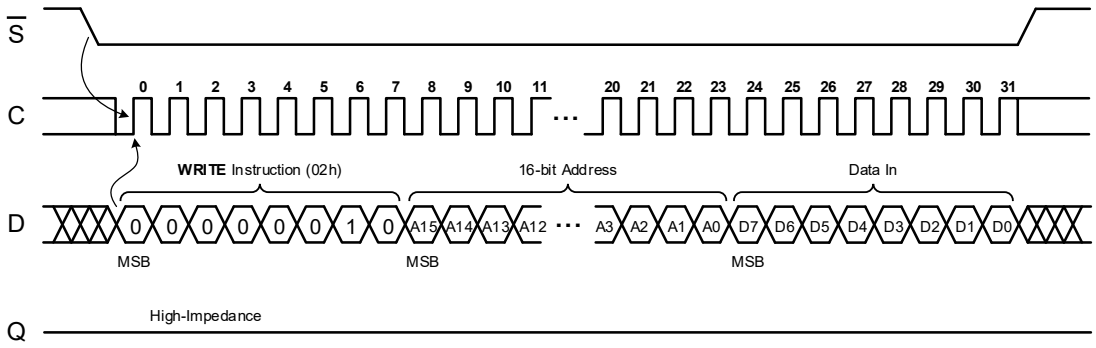


Figure 13. Byte Write

Page Write

A page write sequence allows up to 32 bytes to be written in the same write cycle, provided that all bytes are in the same page of the memory array. Partial page write of less than 32 bytes is allowed. This is achieved by Chip Select ($\overline{S}$) continuing to be driven low after the receipt of each data byte, and the next byte of input data is shifted in (see Figure 14).

Each time a new data byte is shifted in, the five least significant bits of the internal address counter are incremented. The higher address bits are not incremented and retain the page location. When the internal address reaches the page boundary, a condition known as “roll-over” occurs and the following data byte is placed at the beginning of the same page. In case of roll-over, if more than 32 bytes that exceeding the page size are sent to the device, the previous data will be overwritten.

If the addressed page is not in the region protected by the Block Protect (BP1, BP0) bits, driving Chip Select ($\overline{S}$) high at a byte boundary of the input data triggers the self-timed write cycle, which continues for a fix time by the t_{WC} specification. The TD25C640-R will automatically return to the Write Disable state (WEL = 0) at the completion of a write cycle.

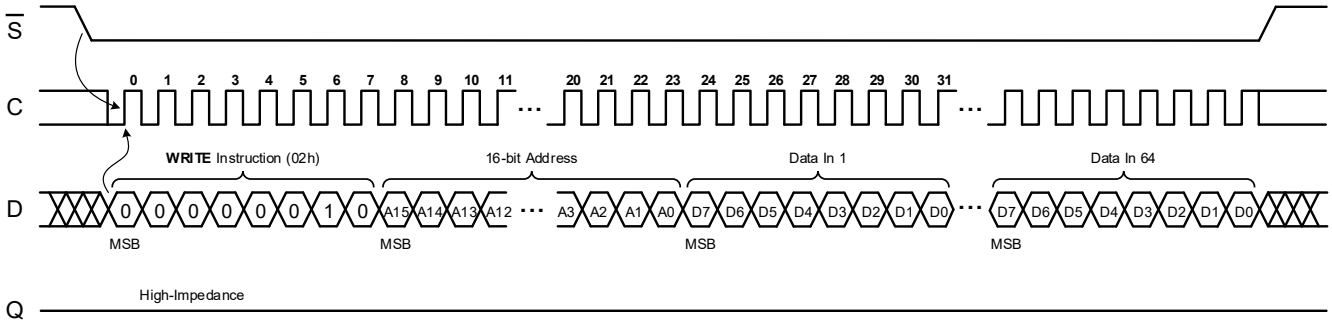


Figure 14. Page Write

Error Correction Code (ECC) and Write Cycling

The Error Correction Code (ECC) is an internal logic function which is transparent for the SPI communication protocol.

The ECC logic is implemented on each group of four EEPROM bytes. A group of four bytes is located at addresses [4 × N, 4 × N + 1, 4 × N + 2, 4 × N + 3], where N is an integer. Inside a group, if a single bit out of the four bytes happens to be erroneous during a Read operation, the ECC detects this bit and replaces it with the correct value. The data reliability is therefore much improved.

Even if the ECC function is performed on groups of four bytes, a single byte can be written/cycled independently. In this case, the ECC function also writes/cycles the three other bytes located in the same group. As a consequence, the maximum cycling budget is defined at group level and the cycling can be distributed over the 4 bytes of the group: the sum of the cycles seen by byte 0, byte 1, byte 2 and byte 3 of the same group must remain below the maximum value defined in ***Reliability Characteristics***.

INSTRUCTIONS (continued)

Polling Routine

A polling routine can be implemented to optimize time-sensitive applications that would not prefer to wait the fixed maximum write cycle time (t_{WC}). This method allows the application to know immediately when the write cycle has completed to start a subsequent operation.

Once the internal write cycle has started, a polling routine can be initiated. This involves repeatedly sending RDSR instruction to determine if the device has completed its self-timed write cycle. If the WIP bit (bit 0 of the Status Register) = 1, the write cycle is still in progress; if the WIP bit = 0, the write cycle has ended. If the WIP bit = 1, repeated RDSR commands can be executed until the WIP bit = 0, indicating that the device is ready to execute a new instruction (see Figure 15).

Only the RDSR instruction is enabled during the write cycle.

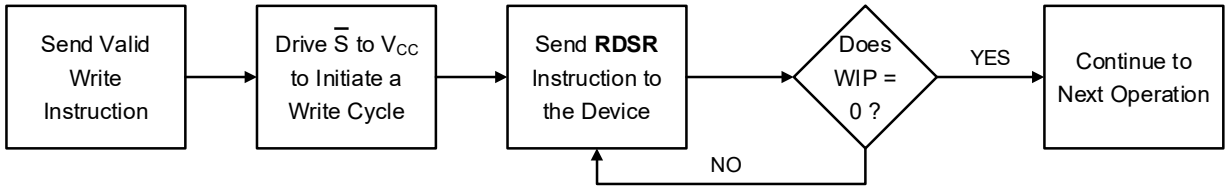


Figure 15. Polling Flow Chart

Read Identification Page (RDID)

The TD25C640-R offers a 32-byte Identification Page (ID Page) in addition to the 64-Kbit memory array for storage of specific application data. This Identification Page can be written and (later) permanently locked in Read-only mode.

Reading the ID Page is achieved with the Read Identification Page (RDID) instruction. Chip Select ($\overline{S}$) signal is first driven low; the bits of the instruction byte (83h) and the address bytes are then shifted in, on Serial Data Input (D). Address bit A10 must be '0'. Other upper address bits are Don't Care, and the lower address bits A4:A0 define the byte locations inside the Identification Page. The byte of data at this address is shifted out on Serial Data Output (Q). If Chip Select ($\overline{S}$) continues to be driven low, the internal address counter is automatically incremented, and the byte of data at the new address is shifted out (see Figure 16). When the end When the end of the ID Page is reached, the address counter will rollover to the beginning of the ID Page, allowing the read cycle to be continued.

The read cycle is terminated by driving Chip Select ($\overline{S}$) high. The rising edge of Chip Select ($\overline{S}$) can occur at any time during the cycle.

The RDID instruction is not accepted, and is not executed, if a write cycle is currently in progress.

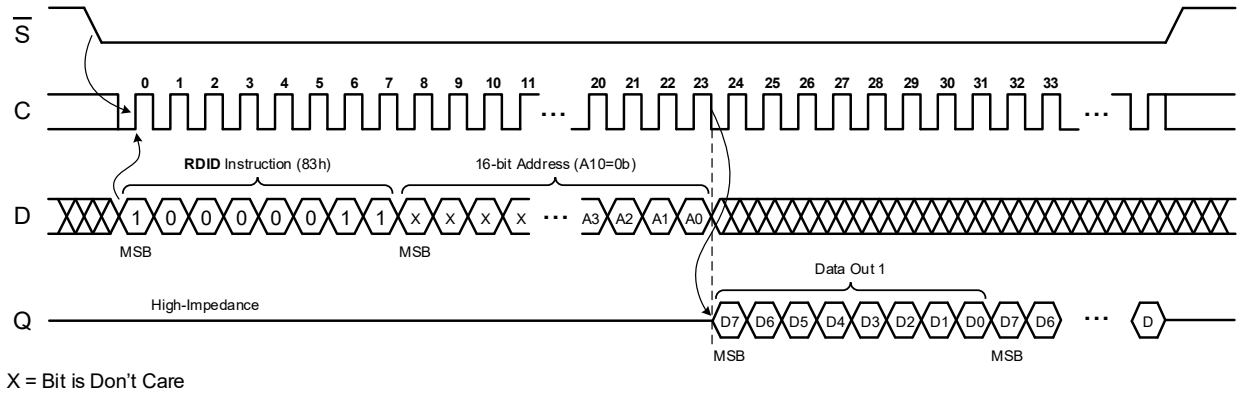


Figure 16. Read Identification Page

INSTRUCTIONS (continued)

Write Identification Page (WRID)

Writing the Identification Page is achieved with the Write Identification Page (WRID) instruction. Before this instruction can be accepted, a WREN instruction must have been executed.

The WRID instruction is defined with Chip Select ($\overline{S}$) signal first driven low. The bits of the instruction byte (82h), address bytes, and at least one data byte are then shifted in on Serial Data Input (D). Address bit A10 must be 0. Upper address bits are Don't Care, and the lower address bits A5:A0 address bits define the byte address inside the Identification Page. The instruction is terminated by driving Chip Select ($\overline{S}$) high at a byte boundary of the input data (see Figure 17). If the Identification Page has not been locked in Read-only mode, the Chip Select ($\overline{S}$) rising edge triggers the self-timed write cycle, which continues for a period of t_{WC}.

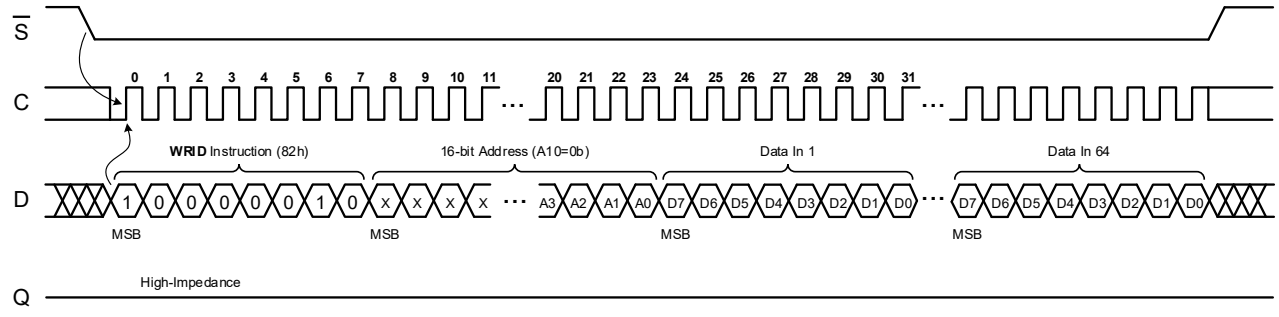


Figure 17. Write Identification Page

Read Lock Status (RDLS)

The Read Lock Status (RDLS) instruction is used to check whether the Identification Page is locked in Read-only mode or not. The RDLS instruction is defined with Chip Select ($\overline{S}$) first driven low. The bits of the instruction byte (83h) and the address bytes are then shifted in, on Serial Data Input (D). Address bit A10 must be '1' and all other address bits are Don't Care. The Lock Status bit is the LSB (least significant bit) of the byte read on Serial Data Output (Q). It is Logic '1' when the lock is active and is Logic '0' when the lock is not active. All other bits are always read as '0' (see Figure 18). If Chip Select ($\overline{S}$) continues to be driven low, the same data byte is shifted out.

The read cycle is terminated by driving Chip Select ($\overline{S}$) high. The rising edge of Chip Select ($\overline{S}$) can occur at any time during the cycle.

The RDLS instruction is not accepted, and is not executed, if a write cycle is currently in progress.

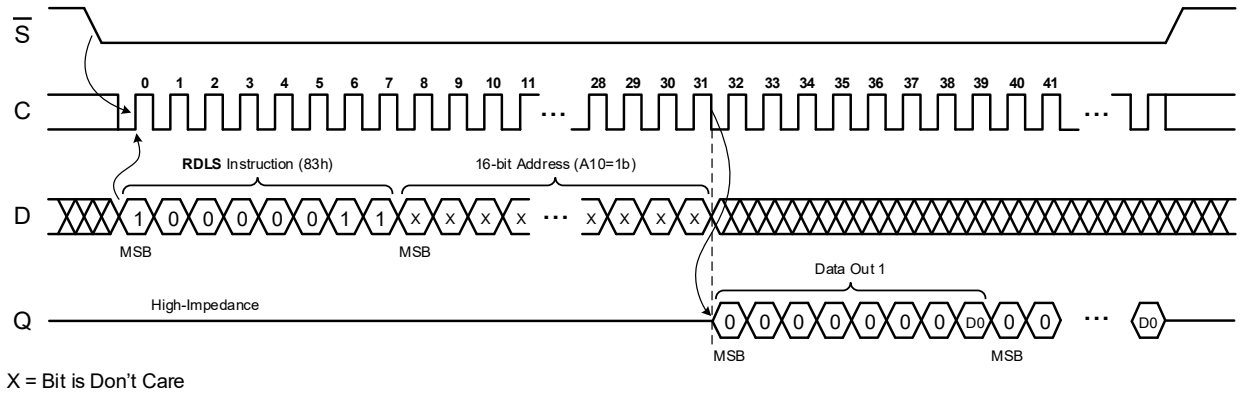


Figure 18. Read Lock Status

INSTRUCTIONS (continued)

Lock Identification Page (LID)


The Lock ID (LID) instruction permanently locks the Identification Page in Read-only mode. Before this instruction can be accepted, a WREN instruction must have been executed.

The LID instruction is issued by driving Chip Select ($\overline{S}$) low first, sending the instruction byte (82h), the address bytes and a data byte on Serial Data Input (D), and driving Chip Select ($\overline{S}$) high. Address bit A10 must be '1' and all other address bits are Don't Care. The data byte sent must be equal to the binary value xxxx_xx1x (where x = bit is Don't Care).

Chip Select ($\overline{S}$) must be driven high after the rising edge of Serial Clock (C) that latches in the eighth bit of the data byte, and before the next rising edge of Serial Clock (C). Otherwise, the LID instruction is not executed (see Figure 19). Driving Chip Select ($\overline{S}$) high at a byte boundary of the input data triggers the self-timed write cycle, which continues for a period of t_{WC}.

The LID instruction is not executed, under the following conditions:

- If the WEL bit has not been set to '1';
- If a Write cycle is already in progress;
- If the device has not been deselected, by driving high Chip Select ($\overline{S}$), at a byte boundary;
- If the Block Protect bits (BP1, BP0) = (1, 1).

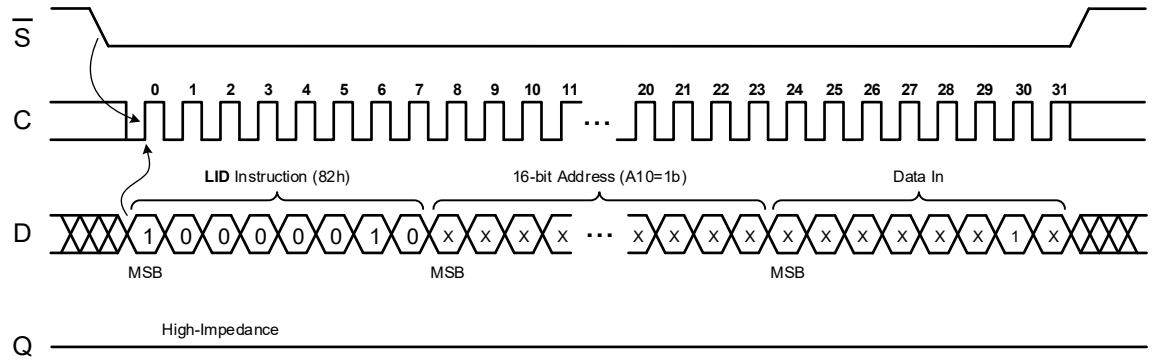

X = Bit is Don't Care

Figure 19. Lock Identification Page

INSTRUCTIONS (continued)

Read Unique ID (RDUID)

The TD25C640-R offers a separate memory block containing a factory programmed 128-bit Unique ID (UID), or Serial Number. Reading this block is achieved with the Read Unique ID (RDUID) instruction. Chip Select ($\overline{S}$) signal is first driven low; the bits of the instruction byte (81h) and the address bytes are then shifted in on Serial Data Input (D). The upper address bits are Don't Care, and the lower address bits A3:A0 define the byte locations inside the Unique ID block. Then the data byte at this address is shifted out on Serial Data Output (Q). If Chip Select ($\overline{S}$) continues to be driven low, the internal address counter is automatically incremented, and the byte of data at the new address is shifted out (see Figure 20).

In order to guarantee a unique number, the entire 128-bit value must be read from the starting address of the Serial Number block with the address bits A3:A0 to be '0000'. Reading from a location other than the first address of the block will not result in a unique Serial Number. Writing or altering the 128-bit Unique ID is not allowed. When the end of the 128-bit UID block is reached, the address counter will rollover to the beginning of this block, allowing the read cycle to be continued.

The read cycle is terminated by driving Chip Select ($\overline{S}$) high. The rising edge of Chip Select ($\overline{S}$) can occur at any time during the cycle.

The RDUID instruction is not accepted, and is not executed, if a write cycle is currently in progress.

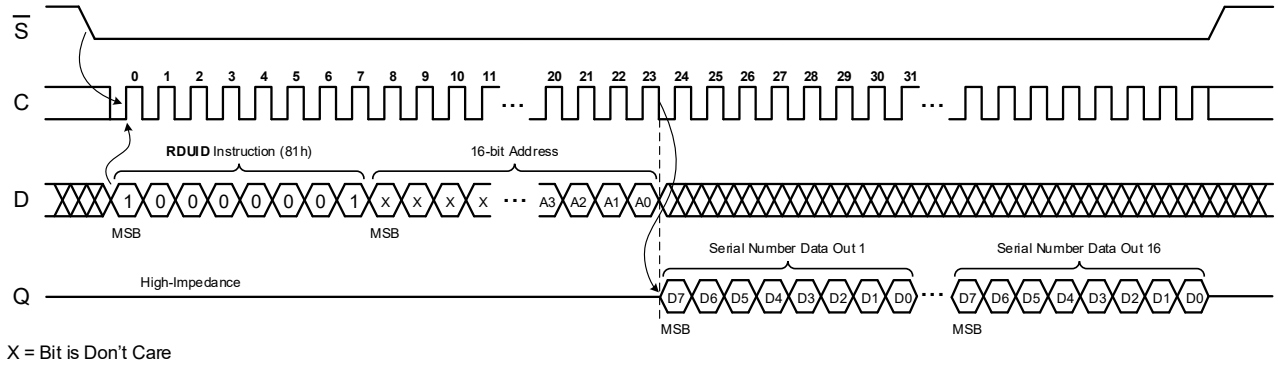


Figure 20. Read Unique ID

POWER-UP AND DELIVERY STATE

Power-up State

After power-up, the TD25C640-R is in the following state:

- Standby mode.
- Deselected (a falling edge on Chip Select ($\overline{S}$) is required before any instructions can be started).
- Not in Hold condition.
- The Write Enable Latch (WEL) bit is reset to '0'.
- The Write In Progress (WIP) bit is reset to '0'.
- The SRWD, BP1 and BP0 bits in the Status Register are unchanged from the previous power-down state (they are non-volatile bits).

Initial Delivery State

The TD25C640-R serial EEPROM is delivered as follows:


- All bits in the memory array are set to '1' (each byte contains FFh).
- All bits in the Identification Page are set to '1' (each byte contains FFh).
- The SRWD, BP1 and BP0 bits in the Status Register are initialized to '0'.


REVISION HISTORY

REVISION	DATE	COMMENTS
REV.A	Nov. 2022	Initial version release
REV.A.1	Dec. 2024	Added: — MSOP Package Marking — MSOP Package Information Updated: — Description — Package/Ordering Information
REV.A.2	Oct. 2026	Updated: — Package Outline Dimensions Added: — N_W at T_A = +105℃ — Tape and Reel Information


PACKAGE OUTLINE DIMENSIONS


SOIC-8

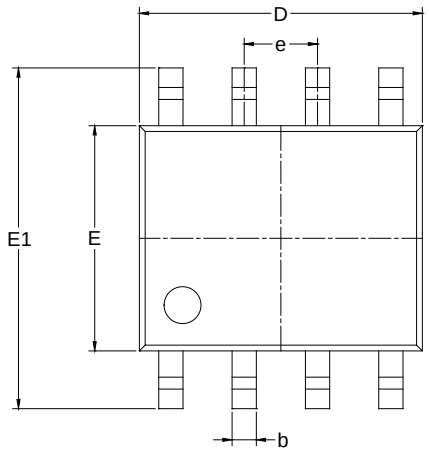

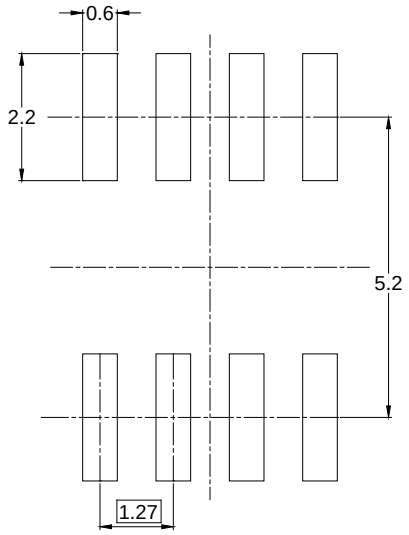

RECOMMENDED LAND PATTERN (Unit: mm)

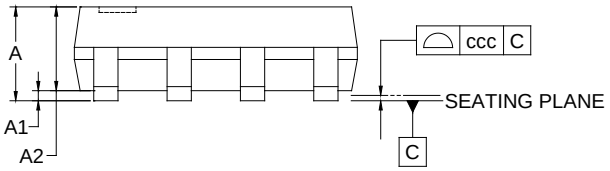

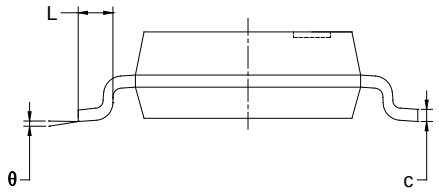



Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	1.350	-	1.750
A1	0.100	-	0.250
A2	1.350	-	1.550
b	0.330	-	0.510
c	0.170	-	0.250
D	4.700	-	5.100
E	3.800	-	4.000
E1	5.800	-	6.200
e	1.270 BSC		
L	0.400	-	1.270
θ	0°	-	8°
ccc	0.100		

NOTES:
1. This drawing is subject to change without notice.
2. This dimension does not include mold flash, protrusions or gate burrs. Mold flash, protrusions or gate burrs shall not exceed 0.15mm per side.
3. Reference JEDEC MS-012.


PACKAGE OUTLINE DIMENSIONS


TSSOP-8

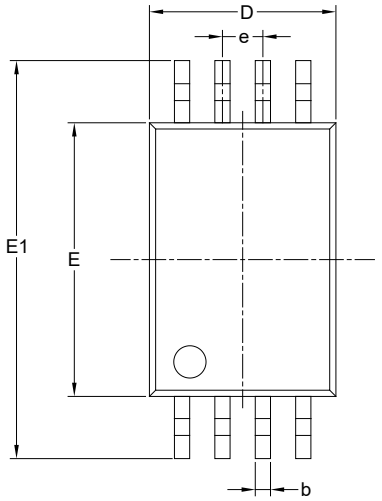

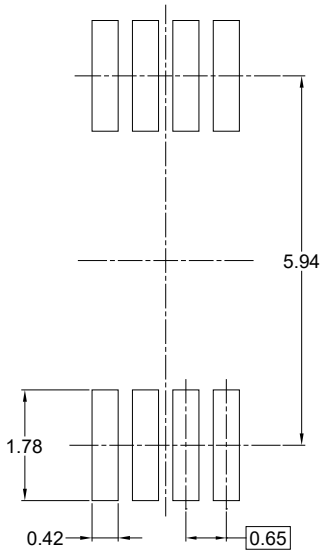

RECOMMENDED LAND PATTERN (Unit: mm)

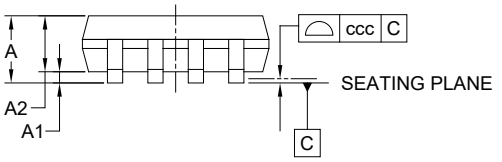

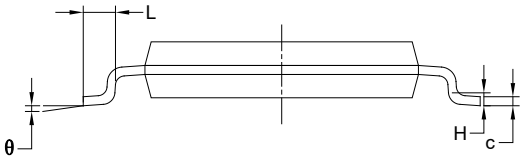


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.200
A1	0.050	-	0.150
A2	0.800	-	1.050
b	0.190	-	0.300
c	0.090	-	0.200
D	2.900	-	3.100
E	4.300	-	4.500
E1	6.200	-	6.600
e	0.650 BSC		
L	0.450	-	0.750
H	0.250 TYP		
θ	0°	-	8°
ccc	0.100		


NOTES:
1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-153.

PACKAGE OUTLINE DIMENSIONS


UTDFN-2×3-8AL

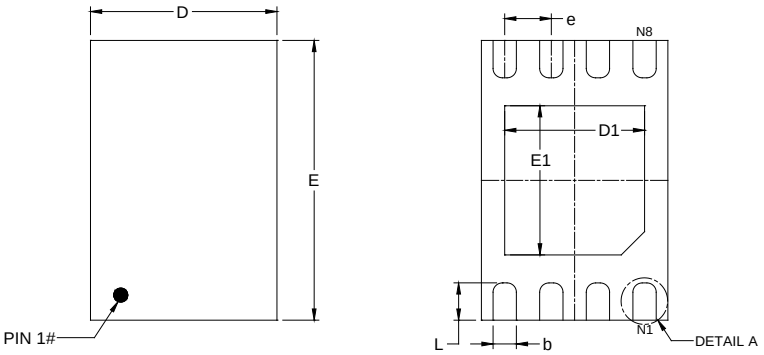

TOP VIEW **BOTTOM VIEW**




SIDE VIEW



DETAIL A

ALTERNATE TERMINAL CONSTRUCTION

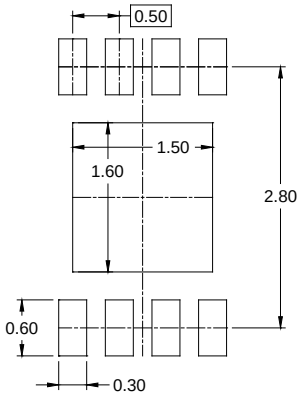


RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.500	-	0.600
A1	0.000	-	0.050
A2	0.150 REF		
b	0.180	-	0.300
D	1.900	-	2.100
D1	1.400	-	1.600
E	2.900	-	3.100
E1	1.500	-	1.700
e	0.500 BSC		
L	0.300	-	0.500
eee	0.080		

NOTE: This drawing is subject to change without notice.


PACKAGE OUTLINE DIMENSIONS


MSOP-8

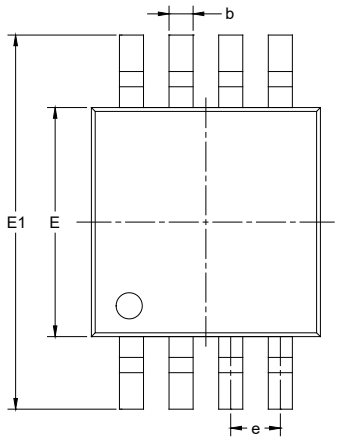

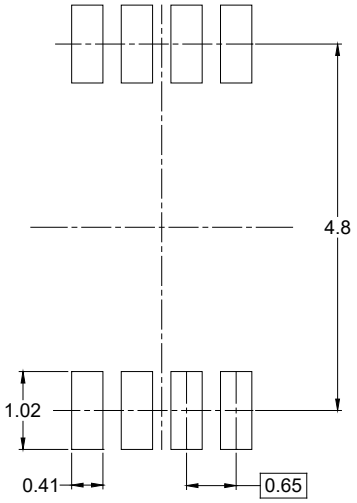

RECOMMENDED LAND PATTERN (Unit: mm)

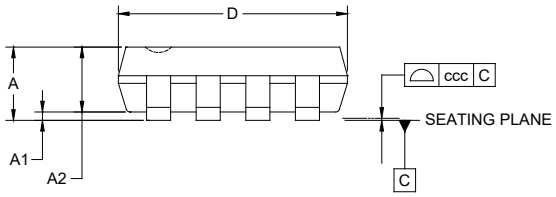

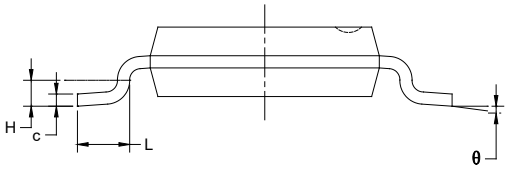


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.100
A1	0.000	-	0.150
A2	0.750	-	0.950
b	0.220	-	0.380
c	0.080	-	0.230
D	2.800	-	3.200
E	2.800	-	3.200
E1	4.650	-	5.150
e	0.650 BSC		
L	0.400	-	0.800
H	0.250 TYP		
θ	0°	-	8°
ccc	0.100		


NOTES:
1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-187.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

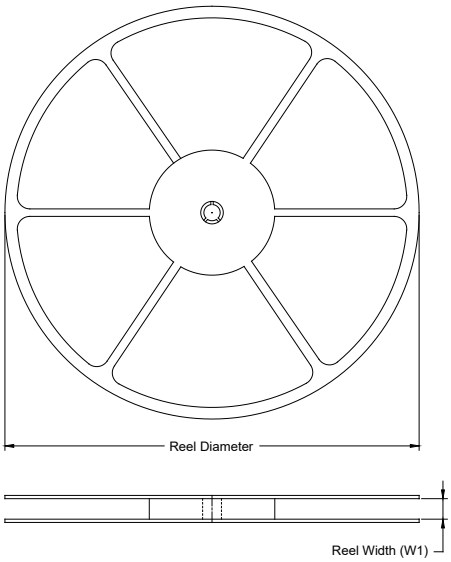

TAPE DIMENSIONS

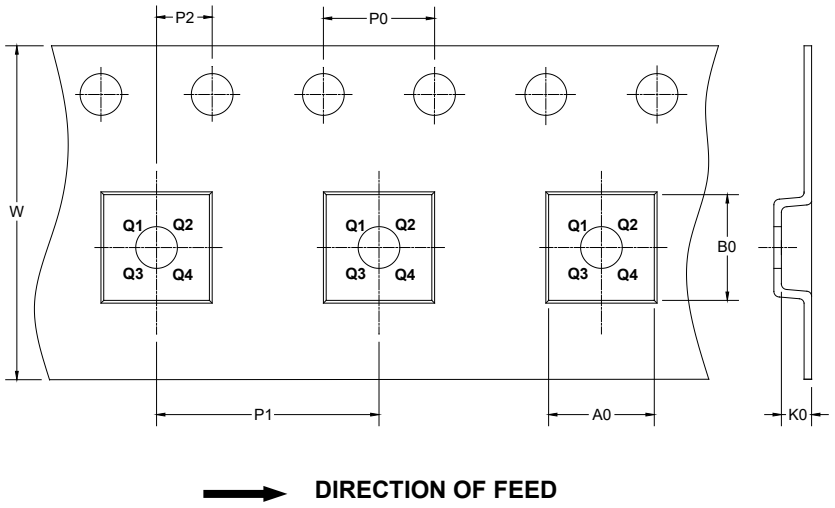


NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-8	13"	12.4	6.60	5.30	1.90	4.0	8.0	2.0	12.0	Q1
TSSOP-8	13"	12.4	6.90	3.40	1.60	4.0	8.0	2.0	12.0	Q1
UTDFN-2×3-8AL	7"	8.6	2.30	3.30	0.95	4.0	4.0	2.0	8.0	Q2
MSOP-8	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

CARTON BOX DIMENSIONS

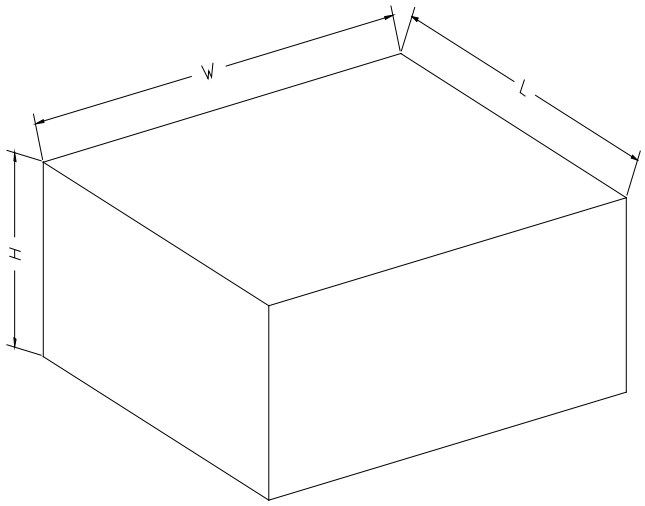

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7″ (Option)	368	227	224	8
7″	442	410	224	18
13″	386	280	370	5

DD0002