

GENERAL DESCRIPTION


The 74LVC1G17Q is a single Schmitt-trigger buffer which can accept the supply voltage range from 1.65V to 5.5V. The device features high output drive while low static-power dissipation can be maintained over the supply voltage operating range, and implements the Boolean function $Y = A$.

This device is highly suitable for partial power-down applications by using power-off leakage current (I_{OFF}) circuit. When the device is powered down, the output is disabled, and the current backflow can be prevented from passing through the device.

The device is AEC-Q100 qualified (Automotive Electronics Council (AEC) standard Q100 Grade 1) and it is suitable for automotive applications.

The 74LVC1G17Q is available in Green SC70-5 and SOT-23-5 packages. It operates over an ambient temperature range of -40°C to $+125^{\circ}\text{C}$.

LOGIC DIAGRAM



FEATURES

- **AEC-Q100 Qualified for Automotive Applications Device Temperature Grade 1**
 $T_A = -40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$
- **Wide Supply Voltage Range: 1.65V to 5.5V**
- **Input Accepts Voltages up to 5.5V**
- **+24mA/-24mA Output Current at $V_{CC} = 3.0\text{V}$**
- **Low Quiescent Current: $I_{CC} = 10\mu\text{A}$ (MAX)**
- **Propagation Delay: 7.5ns (TYP) at $V_{CC} = 3.0\text{V}$**
- **Support Partial Power-Down Mode**
- **-40°C to $+125^{\circ}\text{C}$ Operating Temperature Range**
- **Available in Green SC70-5 and SOT-23-5 Packages**

APPLICATIONS

Automotive Applications
Medical Equipment
Industrial Equipment
Audio Equipment
Computing: Server, PC and Notebook
Telecom Equipment
Wireless Equipment

FUNCTION TABLE


INPUT	OUTPUT
A	Y
H	H
L	L

$Y = A$

H = High Voltage Level

L = Low Voltage Level

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
74LVC1G17Q	SC70-5	-40°C to +125°C	74LVC1G17QC5G/TR	1L8XX	Tape and Reel, 3000
	SOT-23-5	-40°C to +125°C	74LVC1G17QN5G/TR	1LC XXXXXX	Tape and Reel, 3000

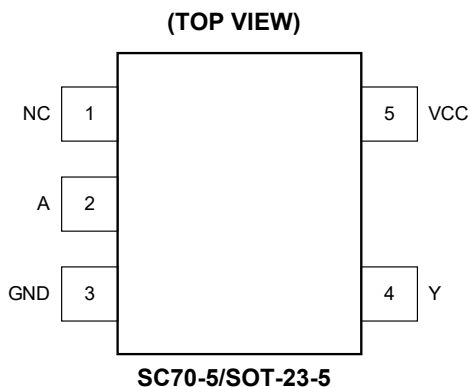PIN CONFIGURATIONS**PIN DESCRIPTION**

PIN	NAME	FUNCTION
1	NC	No Connection.
2	A	Data Input.
3	GND	Ground.
4	Y	Data Output.
5	VCC	Supply Voltage.

ELECTRICAL CHARACTERISTICS(Full = -40°C to +125°C, all typical values are measured at $T_A = +25^\circ\text{C}$ and $V_{CC} = 3.3\text{V}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Positive-Going Input Threshold Voltage	V_{T+}	$V_{CC} = 1.65\text{V}$	Full	0.93	1.04	1.15	V
		$V_{CC} = 2.3\text{V}$	Full	1.37	1.46	1.54	
		$V_{CC} = 3.0\text{V}$	Full	1.77	1.88	1.98	
		$V_{CC} = 4.5\text{V}$	Full	2.50	2.64	2.75	
		$V_{CC} = 5.5\text{V}$	Full	2.94	3.11	3.25	
Negative-Going Input Threshold Voltage	V_{T-}	$V_{CC} = 1.65\text{V}$	Full	0.47	0.55	0.64	V
		$V_{CC} = 2.3\text{V}$	Full	0.75	0.81	0.88	
		$V_{CC} = 3.0\text{V}$	Full	1.02	1.08	1.15	
		$V_{CC} = 4.5\text{V}$	Full	1.52	1.61	1.72	
		$V_{CC} = 5.5\text{V}$	Full	1.82	1.96	2.11	
Hysteresis ($V_{T+} - V_{T-}$)	ΔV_T	$V_{CC} = 1.65\text{V}$	Full	0.34	0.49	0.63	V
		$V_{CC} = 2.3\text{V}$	Full	0.54	0.65	0.74	
		$V_{CC} = 3.0\text{V}$	Full	0.68	0.78	0.90	
		$V_{CC} = 4.5\text{V}$	Full	0.87	1.02	1.16	
		$V_{CC} = 5.5\text{V}$	Full	0.92	1.15	1.36	
High-Level Output Voltage	V_{OH}	$V_{CC} = 1.65\text{V to } 4.5\text{V}, I_{OH} = -100\mu\text{A}$	Full	$V_{CC} - 0.1$	$V_{CC} - 0.01$		V
		$V_{CC} = 1.65\text{V}, I_{OH} = -4\text{mA}$	Full	1.2	1.55		
		$V_{CC} = 2.3\text{V}, I_{OH} = -8\text{mA}$	Full	1.9	2.19		
		$V_{CC} = 2.7\text{V}, I_{OH} = -12\text{mA}$	Full	2.3	2.55		
		$V_{CC} = 3.0\text{V}, I_{OH} = -16\text{mA}$	Full	2.4	2.80		
		$V_{CC} = 3.0\text{V}, I_{OH} = -24\text{mA}$	Full	2.3	2.70		
		$V_{CC} = 4.5\text{V}, I_{OH} = -32\text{mA}$	Full	3.8	4.20		
Low-Level Output Voltage	V_{OL}	$V_{CC} = 1.65\text{V to } 4.5\text{V}, I_{OL} = 100\mu\text{A}$	Full		0.01	0.10	V
		$V_{CC} = 1.65\text{V}, I_{OL} = 4\text{mA}$	Full		0.10	0.45	
		$V_{CC} = 2.3\text{V}, I_{OL} = 8\text{mA}$	Full		0.15	0.30	
		$V_{CC} = 2.7\text{V}, I_{OL} = 12\text{mA}$	Full		0.20	0.50	
		$V_{CC} = 3.0\text{V}, I_{OL} = 16\text{mA}$	Full		0.20	0.40	
		$V_{CC} = 3.0\text{V}, I_{OL} = 24\text{mA}$	Full		0.30	0.55	
		$V_{CC} = 4.5\text{V}, I_{OL} = 32\text{mA}$	Full		0.35	0.55	
Input Leakage Current	I_I	$V_{CC} = 0\text{V to } 5.5\text{V}, V_I = 5.5\text{V or GND}$	Full		± 0.1	± 5	μA
Power-Off Leakage Current	I_{OFF}	$V_{CC} = 0\text{V}, V_I = 5.5\text{V or } V_O = 5.5\text{V}$	Full		± 0.1	± 10	μA
Supply Current	I_{CC}	$V_{CC} = 1.65\text{V to } 5.5\text{V}, V_I = 5.5\text{V or GND}, I_O = 0\text{A}$	Full		0.1	10	μA
Additional Supply Current	ΔI_{CC}	$V_{CC} = 3.0\text{V to } 5.5\text{V}, \text{input at } V_{CC} - 0.6\text{V}$	Full		0.1	500	μA
Input Capacitance	C_I	$V_{CC} = 3.3\text{V}, V_I = V_{CC} \text{ or GND}$	+25°C		5		pF

DYNAMIC CHARACTERISTICS

(See Figure 1 for test circuit. Full = -40°C to +125°C, all typical values are measured at T_A = +25°C and V_{CC} = 1.8V, 2.5V, 3.3V and 5V respectively, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN ⁽¹⁾	TYP	MAX ⁽¹⁾	UNITS
Propagation Delay ⁽²⁾	t _{PD}	A to Y, C _L = 30pF	V _{CC} = 1.65V to 1.95V	Full	1.0	13.0	ns
			V _{CC} = 2.3V to 2.7V	Full	0.5	8.5	
		A to Y, C _L = 50pF	V _{CC} = 3.0V to 3.6V	Full	0.5	7.5	
			V _{CC} = 4.5V to 5.5V	Full	0.5	7.0	
Power Dissipation Capacitance ⁽³⁾	C _{PD}	f = 10MHz	V _{CC} = 1.8V	+25°C		29.0	pF
			V _{CC} = 2.5V	+25°C		30.0	
			V _{CC} = 3.3V	+25°C		31.0	
			V _{CC} = 5.0V	+25°C		35.0	

NOTES:

- Specified by design and characterization, not production tested.
- t_{PD} is the same as t_{PLH} and t_{PHL}.
- C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$$

where:

f_i = Input frequency in MHz.

f_o = Output frequency in MHz.


C_L = Output load capacitance in pF.

V_{CC} = Supply voltage in Volts.

N = Number of inputs switching.

Σ(C_L × V_{CC}² × f_o) = Sum of outputs.

TEST CIRCUIT

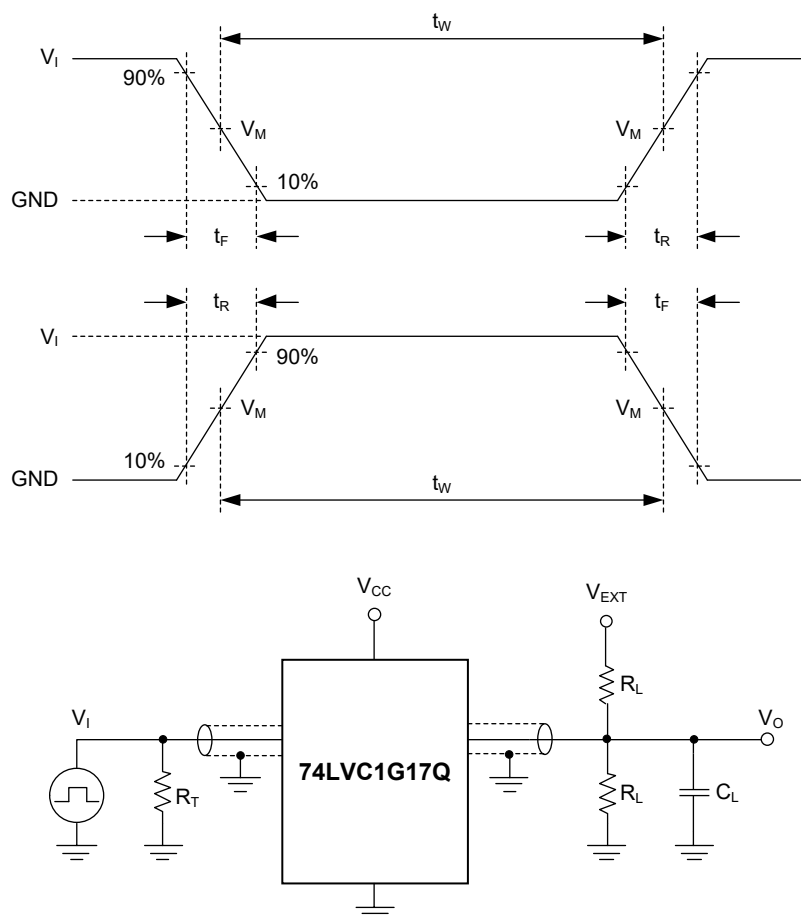

Test conditions are given in Table 1.

Definitions for test circuit:

R_L : Load resistance.

C_L : Load capacitance (includes jig and probe).

R_T : Termination resistance (equals to output impedance Z_o of the pulse generator).


V_{EXT} : External voltage is used to measure switching times.

Figure 1. Test Circuit for Measuring Switching Times

Table 1. Test Conditions

SUPPLY VOLTAGE	INPUT		LOAD		V_{EXT}
V_{CC}	V_I	t_R, t_F	C_L	R_L	t_{PLH}, t_{PHL}
$1.8V \pm 0.15V$	V_{CC}	$\leq 2.0ns$	30pF	1k Ω	Open
$2.5V \pm 0.2V$	V_{CC}	$\leq 2.0ns$	30pF	500 Ω	Open
$3.3V \pm 0.3V$	3.0V	$\leq 2.5ns$	50pF	500 Ω	Open
$5.0V \pm 0.5V$	V_{CC}	$\leq 2.5ns$	50pF	500 Ω	Open

WAVEFORMS

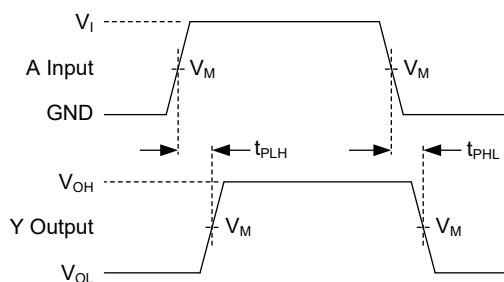

Test conditions are given in Table 1.

Measurement points are given in Table 2.

Logic levels: V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure 2. Input (A) to Output (Y) Propagation Delays

Table 2. Measurement Points

SUPPLY VOLTAGE	INPUT		OUTPUT
V_{CC}	V_I	$V_M^{(1)}$	V_M
$1.8V \pm 0.15V$	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
$2.5V \pm 0.2V$	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$
$3.3V \pm 0.3V$	3.0V	1.5V	1.5V
$5.0V \pm 0.5V$	V_{CC}	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$

NOTE:

1. The measurement points should be V_{IH} or V_{IL} when the input rising or falling time exceeds 2.5ns.

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



Changes from Original to REV.A (DECEMBER 2025)

Page



Changed from product preview to production data.....All

PACKAGE OUTLINE DIMENSIONS

SC70-5

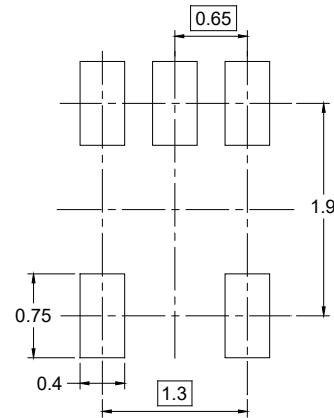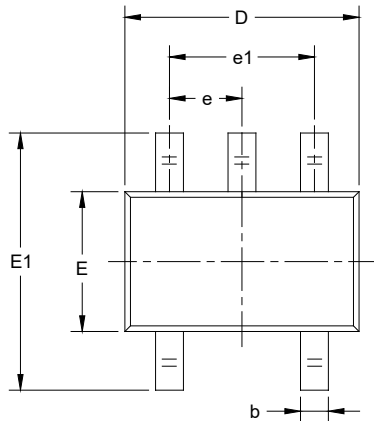

RECOMMENDED LAND PATTERN (Unit: mm)

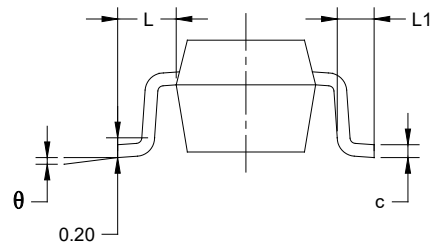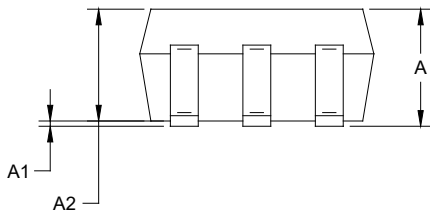



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.800	1.100	0.031	0.043
A1	0.000	0.100	0.000	0.004
A2	0.800	1.000	0.031	0.039
b	0.150	0.350	0.006	0.014
c	0.080	0.220	0.003	0.009
D	2.000	2.200	0.079	0.087
E	1.150	1.350	0.045	0.053
E1	2.150	2.450	0.085	0.096
e	0.65 TYP		0.026 TYP	
e1	1.300 BSC		0.051 BSC	
L	0.525 REF		0.021 REF	
L1	0.260	0.460	0.010	0.018
θ	0°	8°	0°	8°

NOTES:



1. Body dimensions do not include mold flash or protrusion.
2. This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

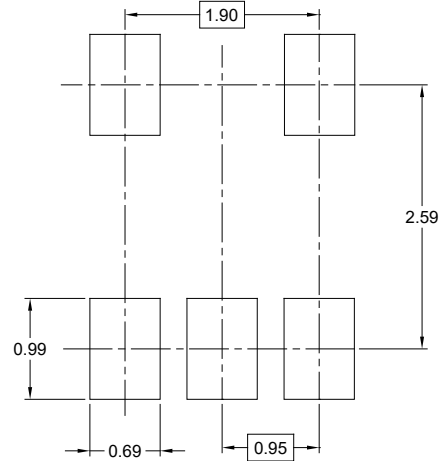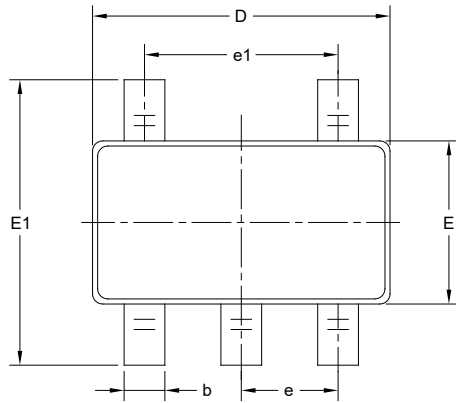

RECOMMENDED LAND PATTERN (Unit: mm)

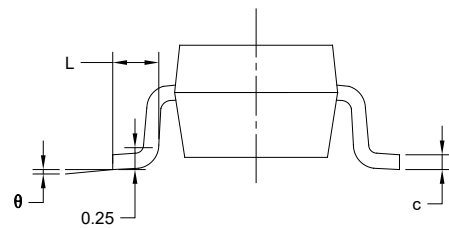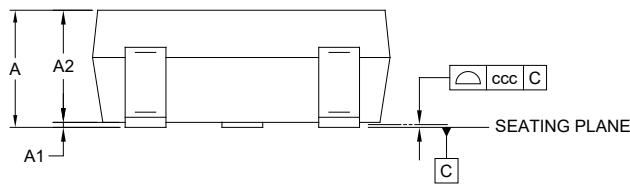

Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	-	-	1.450
A1	0.000	-	0.150
A2	0.900	-	1.300
b	0.300	-	0.500
c	0.080	-	0.220
D	2.750	-	3.050
E	1.450	-	1.750
E1	2.600	-	3.000
e	0.950 BSC		
e1	1.900 BSC		
L	0.300	-	0.600
θ	0°	-	8°
ccc	0.100		


NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.


PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS

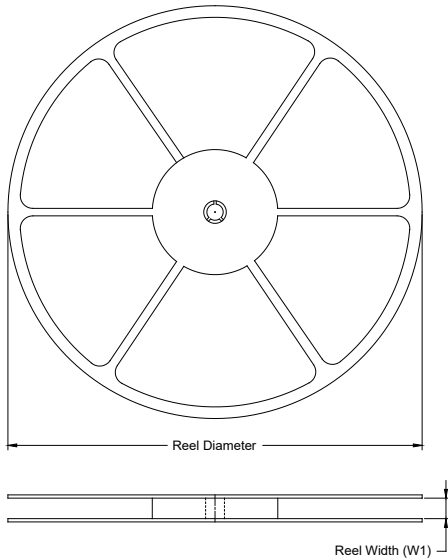

TAPE DIMENSIONS

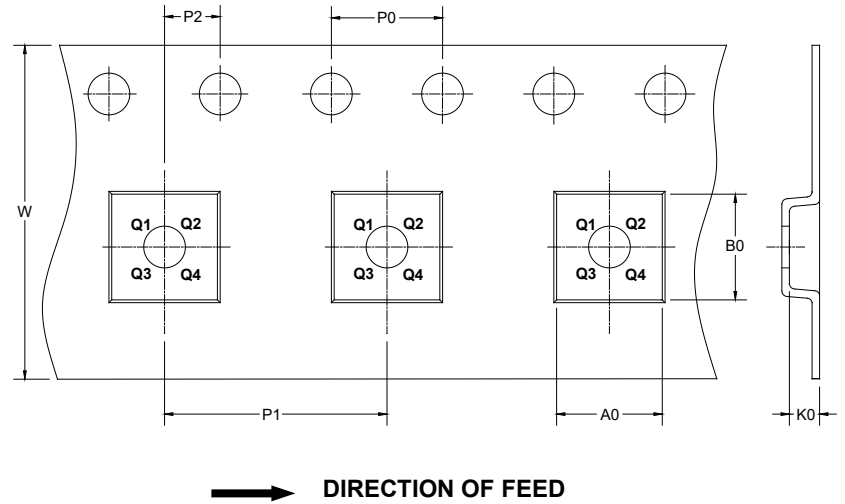

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SC70-5	7"	9.5	2.40	2.50	1.20	4.0	4.0	2.0	8.0	Q3
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002