

GENERAL DESCRIPTION

The 74LV1T34 is a CMOS logic single buffer level shifter. It operates with a wide voltage range from 1.65V to 5.5V, making it suitable for industrial, portable, and telecommunications applications. Due to the wide power supply voltage range, this device can generate the required output level for connection to the controller or processor.

The input features a low threshold circuit. When the supply voltage is at 3.3V, the input can match 1.8V input logic, allowing a level-up translation from 1.8V to 3.3V. Furthermore, the input pin can tolerate up to 5.5V and support level-down translation. For instance, when the supply voltage is at 2.5V, the output voltage can translate from 3.3V to 2.5V. With a reference to the supply voltage, the CMOS level of output can be at 1.8V, 2.5V, 3.3V and 5.0V.

This device has output driving capability of 8mA that can be used to reduce line reflection, overshoot, and undershoot resulted from high driving output.

The 74LV1T34 is available in Green SC70-5, SOT-23-5 and XTDFN-0.8x0.8-4AL packages. It operates over an ambient temperature range of -40°C to +125°C.


APPLICATIONS

- Industrial Equipment
- Telecom Equipment
- Medical Equipment
- Computing: Server, PC and Notebook

FEATURES

- **Wide Supply Voltage Range: 1.65V to 5.5V**
- **Input Accepts Voltages up to 5.5V**
- **Single-Supply Voltage Translator at 1.8V, 2.5V, 3.3V and 5.0V**
- **+8mA/-8mA Output Current**
- **Level-Up Translation:**
 - ♦ 1.2V to 1.8V at $V_{CC} = 1.8V$
 - ♦ 1.5V to 2.5V at $V_{CC} = 2.5V$
 - ♦ 1.8V to 3.3V at $V_{CC} = 3.3V$
 - ♦ 3.3V to 5.0V at $V_{CC} = 5.0V$
- **Level-Down Translation:**
 - ♦ 3.3V to 1.8V at $V_{CC} = 1.8V$
 - ♦ 3.3V to 2.5V at $V_{CC} = 2.5V$
 - ♦ 5.0V to 3.3V at $V_{CC} = 3.3V$
- **Logic Output Refers to Supply Voltage**
- **-40°C to +125°C Operating Temperature Range**
- **Available in Green SC70-5, SOT-23-5 and XTDFN-0.8x0.8-4AL Packages**

LOGIC DIAGRAM



FUNCTION TABLE

| INPUT (Low-Level Input) | OUTPUT (V_{CC} CMOS) |
|----------------------------|----------------------------|
| A | Y |
| H | H |
| L | L |

H = High Voltage Level
L = Low Voltage Level


PACKAGE/ORDERING INFORMATION

| MODEL | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE | ORDERING NUMBER | PACKAGE MARKING | PACKING OPTION |
|----------|---------------------|-----------------------------|-------------------|-----------------|----------------------|
| 74LV1T34 | SC70-5 | -40°C to +125°C | 74LV1T34XC5G/TR | 0C1XX | Tape and Reel, 3000 |
| | SOT-23-5 | -40°C to +125°C | 74LV1T34XN5G/TR | 0C5XX | Tape and Reel, 3000 |
| | XTDFN-0.8×0.8-4AL | -40°C to +125°C | 74LV1T34XXGO4G/TR | 3X | Tape and Reel, 10000 |


MARKING INFORMATION

NOTE: XX = Date Code. X = Date Code.

SC70-5/SOT-23-5



XTDFN-0.8×0.8-4AL



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS ⁽¹⁾

- Supply Voltage Range, V_{CC} -0.5V to 7.0V
- Input Voltage Range, V_I ⁽²⁾ -0.5V to 7.0V
- Output Voltage Range, V_O ⁽²⁾ -0.5V to MIN(7.0V, $V_{CC} + 0.5V$)
- Input Clamp Current, I_{IK} ($V_I < 0V$) -20mA
- Output Clamp Current, I_{OK} ($V_O < 0V$ or $V_O > V_{CC}$) ±20mA
- Continuous Output Current, I_O ±25mA
- Continuous Current through V_{CC} or GND..... ±50mA
- Junction Temperature ⁽³⁾ +150°C
- Storage Temperature Range -65°C to +150°C
- Lead Temperature (Soldering, 10s) +260°C
- ESD Susceptibility
- HBM..... 6000V
- CDM 1000V

RECOMMENDED OPERATING CONDITIONS

- Supply Voltage Range, V_{CC} 1.65V to 5.5V
- Input Voltage Range, V_I 0V to 5.5V
- Output Voltage Range, V_O 0V to V_{CC}
- Input Transition Rise or Fall Rate, $\Delta t/\Delta V$
 $V_{CC} = 1.8V$ to 5.0V 20ns/V (MAX)
- Operating Temperature Range -40°C to +125°C

OVERSTRESS CAUTION

1. Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.
2. The input and output voltage ratings may be exceeded if the input and output clamp current ratings are observed.
3. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.



ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

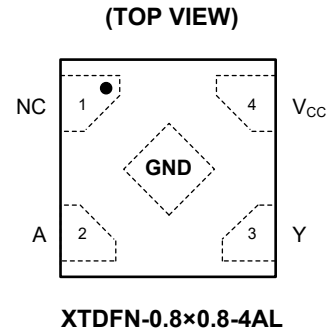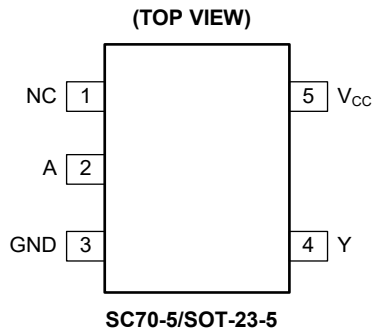

PIN DESCRIPTION

| PIN | | NAME | FUNCTION |
|-----------------|-------------------|-----------------|-----------------|
| SC70-5/SOT-23-5 | XTDFN-0.8x0.8-4AL | | |
| 1 | 1 | NC | No Connection. |
| 2 | 2 | A | Data Input. |
| 3 | Exposed Pad | GND | Ground. |
| 4 | 3 | Y | Data Output. |
| 5 | 4 | V _{CC} | Supply Voltage. |

ELECTRICAL CHARACTERISTICS(Full = -40°C to +125°C, all typical values are measured at $T_A = +25^\circ\text{C}$, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | TEMP | MIN | TYP | MAX | UNITS |
|---------------------------|-----------------|--|-------|----------------|-----------------|---------|---------------|
| High-Level Input Voltage | V_{IH} | $V_{CC} = 1.65\text{V to }1.8\text{V}$ | Full | 1.00 | | | V |
| | | $V_{CC} = 2.0\text{V}$ | Full | 1.03 | | | |
| | | $V_{CC} = 2.25\text{V to }2.5\text{V}$ | Full | 1.18 | | | |
| | | $V_{CC} = 2.75\text{V}$ | Full | 1.25 | | | |
| | | $V_{CC} = 3.0\text{V to }3.3\text{V}$ | Full | 1.39 | | | |
| | | $V_{CC} = 3.6\text{V}$ | Full | 1.48 | | | |
| | | $V_{CC} = 4.5\text{V to }5.0\text{V}$ | Full | 2.03 | | | |
| | | $V_{CC} = 5.5\text{V}$ | Full | 2.11 | | | |
| Low-Level Input Voltage | V_{IL} | $V_{CC} = 1.65\text{V to }2.0\text{V}$ | Full | | | 0.55 | V |
| | | $V_{CC} = 2.25\text{V to }2.75\text{V}$ | Full | | | 0.65 | |
| | | $V_{CC} = 3.0\text{V to }3.6\text{V}$ | Full | | | 0.65 | |
| | | $V_{CC} = 4.5\text{V to }5.5\text{V}$ | Full | | | 0.80 | |
| High-Level Output Voltage | V_{OH} | $V_{CC} = 1.65\text{V to }5.5\text{V}, I_{OH} = -20\mu\text{A}$ | Full | $V_{CC} - 0.1$ | $V_{CC} - 0.01$ | | V |
| | | $V_{CC} = 1.65\text{V}, I_{OH} = -2\text{mA}$ | Full | 1.21 | 1.53 | | |
| | | $V_{CC} = 1.8\text{V}, I_{OH} = -2\text{mA}$ | Full | 1.45 | 1.70 | | |
| | | $V_{CC} = 2.3\text{V}, I_{OH} = -3\text{mA}$ | Full | 1.93 | 2.19 | | |
| | | $V_{CC} = 2.5\text{V}, I_{OH} = -3\text{mA}$ | Full | 2.15 | 2.40 | | |
| | | $V_{CC} = 3.0\text{V}, I_{OH} = -3\text{mA}$ | Full | 2.70 | 2.92 | | |
| | | $V_{CC} = 3.0\text{V}, I_{OH} = -5.5\text{mA}$ | Full | 2.49 | 2.85 | | |
| | | $V_{CC} = 3.3\text{V}, I_{OH} = -5.5\text{mA}$ | Full | 2.80 | 3.17 | | |
| | | $V_{CC} = 4.5\text{V}, I_{OH} = -4\text{mA}$ | Full | 4.10 | 4.42 | | |
| | | $V_{CC} = 4.5\text{V}, I_{OH} = -8\text{mA}$ | Full | 3.95 | 4.35 | | |
| | | $V_{CC} = 5.0\text{V}, I_{OH} = -8\text{mA}$ | Full | 4.50 | 4.86 | | |
| Low-Level Output Voltage | V_{OL} | $V_{CC} = 1.65\text{V to }5.5\text{V}, I_{OL} = 20\mu\text{A}$ | Full | | 0.01 | 0.10 | V |
| | | $V_{CC} = 1.65\text{V}, I_{OL} = 2\text{mA}$ | Full | | 0.07 | 0.25 | |
| | | $V_{CC} = 2.3\text{V}, I_{OL} = 3\text{mA}$ | Full | | 0.07 | 0.20 | |
| | | $V_{CC} = 3.0\text{V}, I_{OL} = 3\text{mA}$ | Full | | 0.06 | 0.15 | |
| | | $V_{CC} = 3.0\text{V}, I_{OL} = 5.5\text{mA}$ | Full | | 0.11 | 0.25 | |
| | | $V_{CC} = 4.5\text{V}, I_{OL} = 4\text{mA}$ | Full | | 0.06 | 0.20 | |
| | | $V_{CC} = 4.5\text{V}, I_{OL} = 8\text{mA}$ | Full | | 0.12 | 0.35 | |
| Input Leakage Current | I_I | A input, $V_{CC} = 0\text{V}, 1.8\text{V}, 2.5\text{V}, 3.3\text{V}, 5.5\text{V}$, $V_I = V_{CC}$ or GND | Full | | ± 0.01 | ± 1 | μA |
| Supply Current | I_{CC} | $V_{CC} = 1.8\text{V to }5.5\text{V}, V_I = V_{CC}$ or GND, $I_O = 0\text{A}$ | Full | | 0.01 | 5 | μA |
| Additional Supply Current | ΔI_{CC} | One input at 0.3V or 1.1V, other inputs at V_{CC} or GND, $V_{CC} = 1.8\text{V}, I_O = 0\text{A}$ | Full | | 0.05 | 5 | μA |
| | | One input at 0.3V or 3.4V, other inputs at V_{CC} or GND, $V_{CC} = 5.5\text{V}, I_O = 0\text{A}$ | Full | | 0.30 | 1 | mA |
| Input Capacitance | C_I | $V_{CC} = 3.3\text{V}, V_I = V_{CC}$ or GND | +25°C | | 4 | | pF |
| Output Capacitance | C_O | $V_{CC} = 3.3\text{V}, V_O = V_{CC}$ or GND | +25°C | | 6 | | pF |

DYNAMIC CHARACTERISTICS

(See Figure 1 for test circuit. Full = -40°C to +125°C, all typical values are measured at T_A = +25°C and V_{CC} = 1.8V, 2.5V, 3.3V and 5.0V respectively, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | TEMP | MIN ⁽¹⁾ | TYP | MAX ⁽¹⁾ | UNITS | |
|--|-----------------|----------------------|---|--------------------|-----|--------------------|-------|----|
| Propagation Delay ⁽²⁾ | t _{PD} | A to Y, see Figure 2 | V _{CC} = 1.8V, C _L = 15pF | Full | 0.5 | 7.5 | 16.0 | ns |
| | | | V _{CC} = 1.8V, C _L = 30pF | Full | 0.5 | 8.5 | 20.0 | |
| | | | V _{CC} = 2.5V, C _L = 15pF | Full | 0.5 | 5.5 | 9.0 | |
| | | | V _{CC} = 2.5V, C _L = 30pF | Full | 0.5 | 6.5 | 11.0 | |
| | | | V _{CC} = 3.3V, C _L = 15pF | Full | 0.5 | 5.0 | 8.0 | |
| | | | V _{CC} = 3.3V, C _L = 30pF | Full | 0.5 | 6.0 | 9.0 | |
| | | | V _{CC} = 5.0V, C _L = 15pF | Full | 0.5 | 5.0 | 6.5 | |
| | | | V _{CC} = 5.0V, C _L = 30pF | Full | 0.5 | 6.0 | 8.0 | |
| Power Dissipation Capacitance ⁽³⁾ | C _{PD} | f = 1MHz and 10MHz | V _{CC} = 1.8V ± 0.15V | +25°C | | 14.0 | pF | |
| | | | V _{CC} = 2.5V ± 0.2V | +25°C | | 14.0 | | |
| | | | V _{CC} = 3.3V ± 0.3V | +25°C | | 15.0 | | |
| | | | V _{CC} = 5.0V ± 0.5V | +25°C | | 17.0 | | |

NOTES:

- Specified by design and characterization, not production tested.
- t_{PD} is the same as t_{PLH} and t_{PHL}.
- C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$$

where:

f_i = Input frequency in MHz.

f_o = Output frequency in MHz.


C_L = Output load capacitance in pF.

V_{CC} = Supply voltage in Volts.

N = Number of inputs switching.

Σ(C_L × V_{CC}² × f_o) = Sum of outputs.

TEST CIRCUIT

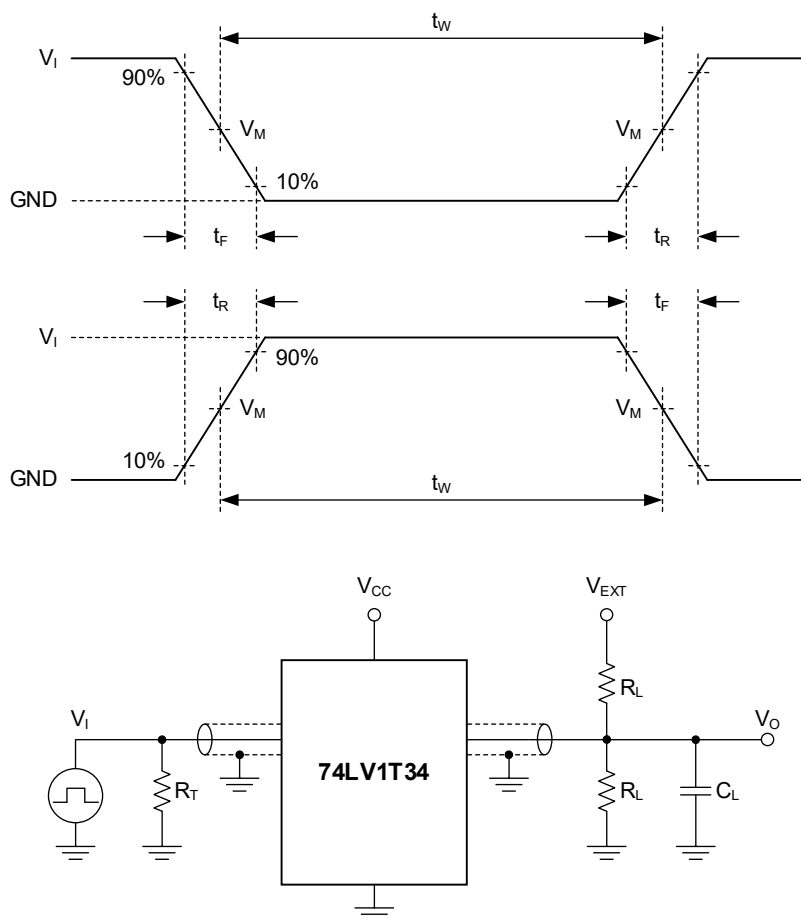

Test conditions are given in Table 1.

Definitions for test circuit:

R_L : Load resistance.

C_L : Load capacitance (includes jig and probe).

R_T : Termination resistance (equals to output impedance Z_O of the pulse generator).


V_{EXT} : External voltage is used to measure switching time.

Figure 1. Test Circuit for Measuring Switching Times

Table 1. Test Conditions

| SUPPLY VOLTAGE | INPUT | | | LOAD | | V_{EXT} |
|------------------|----------|--------------|-----------|------------|-------------|--------------------|
| V_{CC} | V_I | t_R, t_F | f_{MAX} | C_L | R_L | t_{PLH}, t_{PHL} |
| $1.8V \pm 0.15V$ | V_{CC} | $\leq 1.0ns$ | 15MHz | 15pF, 30pF | 1M Ω | GND |
| $2.5V \pm 0.2V$ | V_{CC} | $\leq 1.0ns$ | 25MHz | 15pF, 30pF | 1M Ω | GND |
| $3.3V \pm 0.3V$ | V_{CC} | $\leq 1.0ns$ | 50MHz | 15pF, 30pF | 1M Ω | GND |
| $5.0V \pm 0.5V$ | V_{CC} | $\leq 1.0ns$ | 50MHz | 15pF, 30pF | 1M Ω | GND |

WAVEFORMS

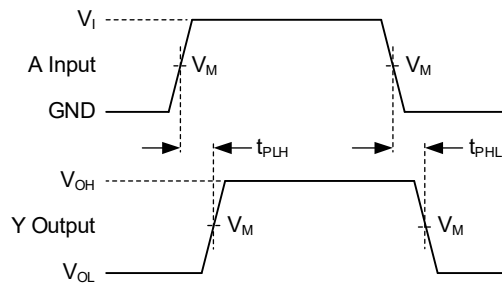

Test conditions are given in Table 1.

Measurement points are given in Table 2.

Logic levels: V_{OL} and V_{OH} are typical output voltage levels that occur with the output load.

Figure 2. Input A to Output Y Propagation Delay Times

Table 2. Measurement Points

| INPUT | OUTPUT |
|---------------------|---------------------|
| $V_M^{(1)}$ | V_M |
| $0.5 \times V_{CC}$ | $0.5 \times V_{CC}$ |

NOTE:

1. The measurement points should be V_{IH} or V_{IL} when the input rising or falling time exceeds 1.0ns.



REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



| MARCH 2024 – REV.A to REV.A.1 | Page |
|--|------|
| Added XTDFN-0.8×0.8-4AL package | All |
| Changes from Original (DECEMBER 2023) to REV.A | Page |
| Changed from product preview to production data..... | All |

PACKAGE OUTLINE DIMENSIONS

SC70-5

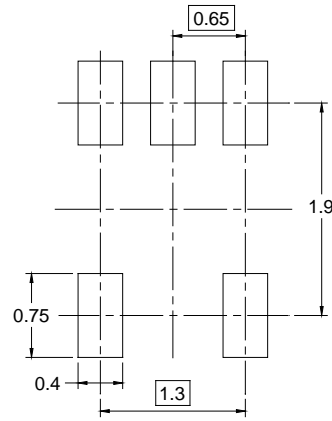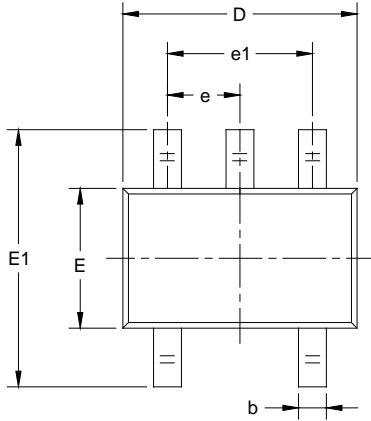

RECOMMENDED LAND PATTERN (Unit: mm)

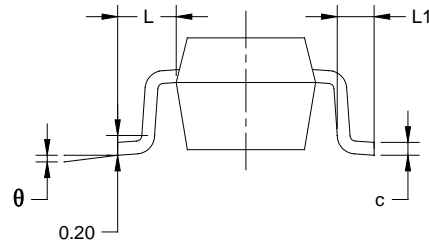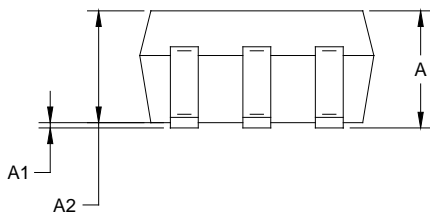

| Symbol | Dimensions In Millimeters | | Dimensions In Inches | |
|----------|------------------------------|-------|-------------------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.800 | 1.100 | 0.031 | 0.043 |
| A1 | 0.000 | 0.100 | 0.000 | 0.004 |
| A2 | 0.800 | 1.000 | 0.031 | 0.039 |
| b | 0.150 | 0.350 | 0.006 | 0.014 |
| c | 0.080 | 0.220 | 0.003 | 0.009 |
| D | 2.000 | 2.200 | 0.079 | 0.087 |
| E | 1.150 | 1.350 | 0.045 | 0.053 |
| E1 | 2.150 | 2.450 | 0.085 | 0.096 |
| e | 0.65 TYP | | 0.026 TYP | |
| e1 | 1.300 BSC | | 0.051 BSC | |
| L | 0.525 REF | | 0.021 REF | |
| L1 | 0.260 | 0.460 | 0.010 | 0.018 |
| θ | 0° | 8° | 0° | 8° |



NOTES:

1. Body dimensions do not include mode flash or protrusion.
2. This drawing is subject to change without notice.



PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS

SOT-23-5

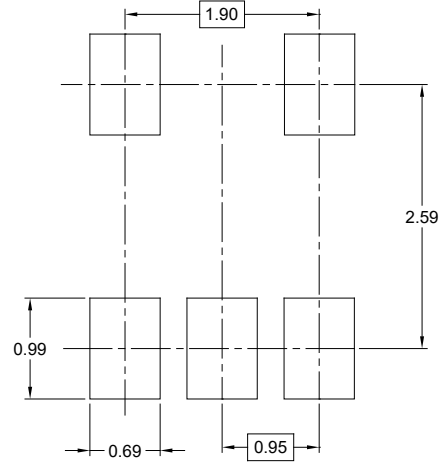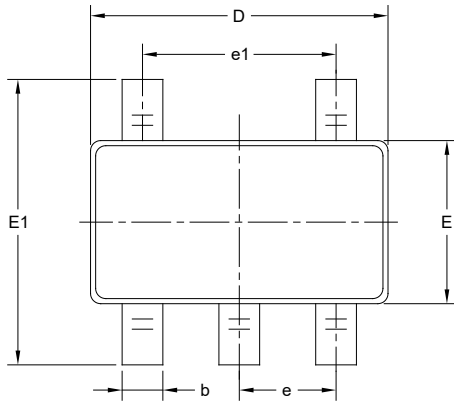

RECOMMENDED LAND PATTERN (Unit: mm)

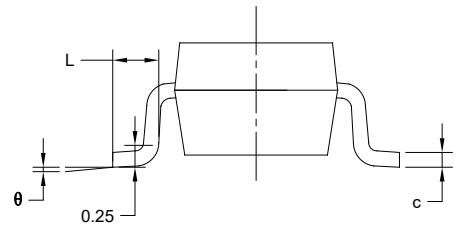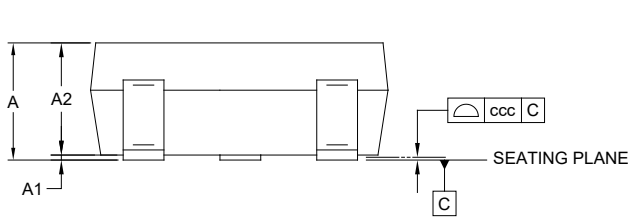

| Symbol | Dimensions In Millimeters | | |
|----------|---------------------------|-----|-------|
| | MIN | MOD | MAX |
| A | - | - | 1.450 |
| A1 | 0.000 | - | 0.150 |
| A2 | 0.900 | - | 1.300 |
| b | 0.300 | - | 0.500 |
| c | 0.080 | - | 0.220 |
| D | 2.750 | - | 3.050 |
| E | 1.450 | - | 1.750 |
| E1 | 2.600 | - | 3.000 |
| e | 0.950 BSC | | |
| e1 | 1.900 BSC | | |
| L | 0.300 | - | 0.600 |
| θ | 0° | - | 8° |
| ccc | 0.100 | | |


NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-178.


PACKAGE INFORMATION

PACKAGE OUTLINE DIMENSIONS


XTDFN-0.8×0.8-4AL

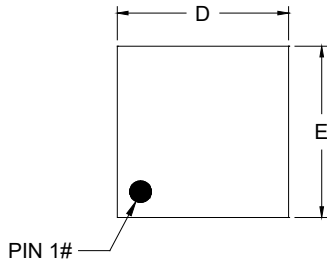


TOP VIEW

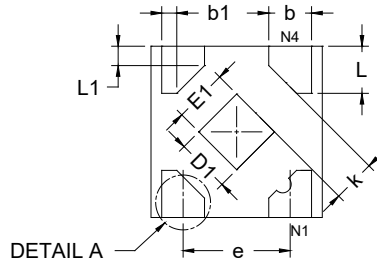


BOTTOM VIEW

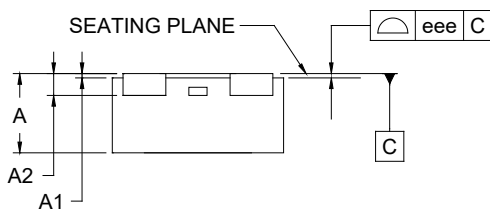

SIDE VIEW

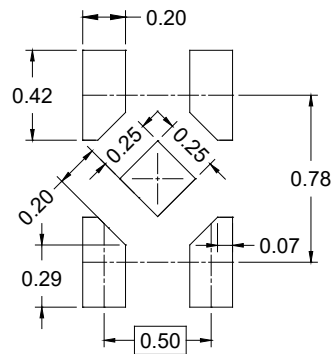

RECOMMENDED LAND PATTERN (Unit: mm)



| Symbol | Dimensions In Millimeters | | |
|--------|---------------------------|-----|-------|
| | MIN | MOD | MAX |
| A | 0.320 | - | 0.400 |
| A1 | 0.000 | - | 0.050 |
| A2 | 0.102 REF | | |
| b | 0.150 | - | 0.250 |
| b1 | 0.070 REF | | |
| D | 0.700 | - | 0.900 |
| E | 0.700 | - | 0.900 |
| D1 | 0.150 | - | 0.350 |
| E1 | 0.150 | - | 0.350 |
| L | 0.170 | - | 0.270 |
| L1 | 0.090 REF | | |
| e | 0.500 BSC | | |
| k | 0.200 REF | | |
| eee | 0.050 | | |

NOTE: This drawing is subject to change without notice.

PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

| Package Type | Reel Diameter | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P0 (mm) | P1 (mm) | P2 (mm) | W (mm) | Pin1 Quadrant |
|-------------------|---------------|--------------------|---------|---------|---------|---------|---------|---------|--------|---------------|
| SC70-5 | 7" | 9.5 | 2.40 | 2.50 | 1.20 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |
| SOT-23-5 | 7" | 9.5 | 3.20 | 3.20 | 1.40 | 4.0 | 4.0 | 2.0 | 8.0 | Q3 |
| XTDFN-0.8×0.8-4AL | 7" | 9.5 | 0.94 | 0.94 | 0.50 | 4.0 | 2.0 | 2.0 | 8.0 | Q3 |

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

| Reel Type | Length (mm) | Width (mm) | Height (mm) | Pizza/Carton |
|-------------|-------------|------------|-------------|--------------|
| 7" (Option) | 368 | 227 | 224 | 8 |
| 7" | 442 | 410 | 224 | 18 |

DD0002