

### GENERAL DESCRIPTION

The SGM18UB1E1 is an ultra-low capacitance ESD protection device designed to protect circuits from electrostatic discharge.

### FEATURES

- **High ESD Withstand Voltage:**
  - ◆ IEC 61000-4-2: ±8kV (Air)
  - ◆ IEC 61000-4-2: ±8kV (Contact)
- **0.35pF (TYP) Channel Input Capacitance**
- **Working Voltage: 18V and Below**
- **Low Profile Packages: UTDFN-1×0.6-2L and XTDFN-0.6×0.3-2L**

### APPLICATIONS

Cellular Handsets & Accessories  
 Computers and Peripherals  
 Audio and Video Equipment  
 SIM Card Protection  
 Portable Electronics  
 10/100Mbit/s Ethernet

### ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Current ( $t_p = 8/20\mu s$ )	$I_{PP}$	1.4	A
ESD IEC 61000-4-2 (Air)	$V_{ESD}$	±8	kV
ESD IEC 61000-4-2 (Contact)		±8	
Operating Temperature Range	$T_J$	-40 to 125	°C
Storage Temperature Range	$T_{STG}$	-55 to 150	
Lead Temperature (Soldering, 10s)		+260	°C

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability.



### PRODUCT SUMMARY

$V_{RWM}$ (MAX)	$I_{PP}$ (MAX)	$C_{IN}$ (TYP)
18V	1.4A	0.35pF

### PIN CONFIGURATIONS

(TOP VIEW)

(TOP VIEW)



UTDFN-1×0.6-2L

XTDFN-0.6×0.3-2L

### EQUIVALENT CIRCUIT




**PACKAGE/ORDERING INFORMATION**

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM18UB1E1	UTDFN-1x0.6-2L	-40°C to +125°C	SGM18UB1E1XUEG2G/TR	09X	Tape and Reel, 10000
	XTDFN-0.6x0.3-2L	-40°C to +125°C	SGM18UB1E1XXEI2G/TR	07	Tape and Reel, 10000

**MARKING INFORMATION**


NOTE: X = Date Code.

UTDFN-1x0.6-2L



NOTE: Fixed character for 07.

XTDFN-0.6x0.3-2L




Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

**ELECTRICAL PARAMETERS**

SYMBOL	PARAMETER
$V_{RWM}$	Reverse Stand-Off Voltage
$V_{BR}$	Reverse Breakdown Voltage
$I_R$	Reverse Leakage Current
$I_R @ BR$	Reverse Leakage Current @ Breakdown
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$R_{DYN}$	Dynamic Resistance

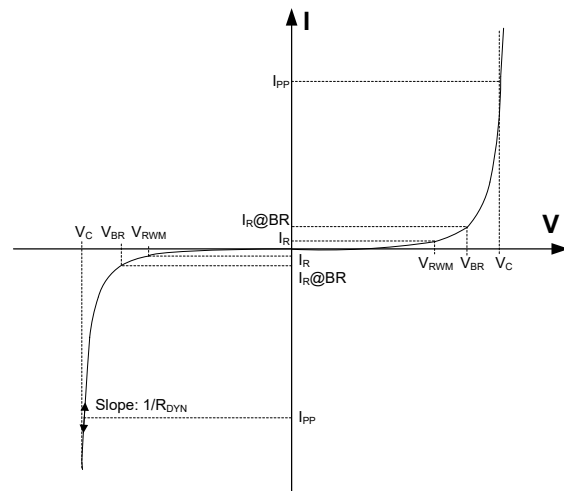


**ELECTRICAL CHARACTERISTICS**(T<sub>A</sub> = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Reverse Stand-Off Voltage	V <sub>RWM</sub>				18	V
Reverse Breakdown Voltage	V <sub>BR</sub>	I <sub>R</sub> = 1mA	19	21	25	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 18V		20	100	nA
Channel Input Capacitance	C <sub>IN</sub>	V <sub>R</sub> = 0V, f = 1MHz, I/O to I/O		0.35		pF
ESD Clamping Voltage <sup>(1)</sup>	V <sub>C</sub>	t <sub>p</sub> = 100ns, I <sub>TLP</sub> = 8A		31		V
		t <sub>p</sub> = 100ns, I <sub>TLP</sub> = 16A		36		
Dynamic Resistance <sup>(1)</sup>	R <sub>DYN</sub>	t <sub>p</sub> = 100ns		0.62		Ω


NOTE: 1. Non-repetitive current pulse. Transmission Line Pulse (TLP) t<sub>p</sub> = 100ns, square pulse.

TYPICAL PERFORMANCE CHARACTERISTICS


ESD pulse waveform per IEC61000-4-2

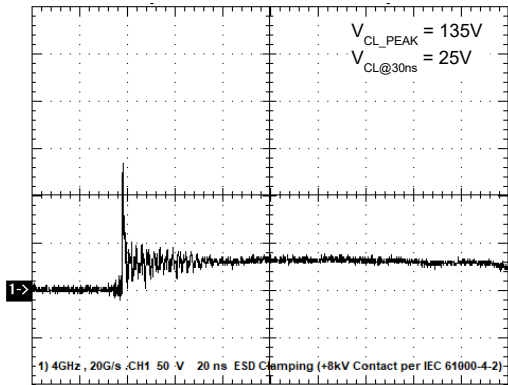


ESD pulse waveform per IEC61000-4-2

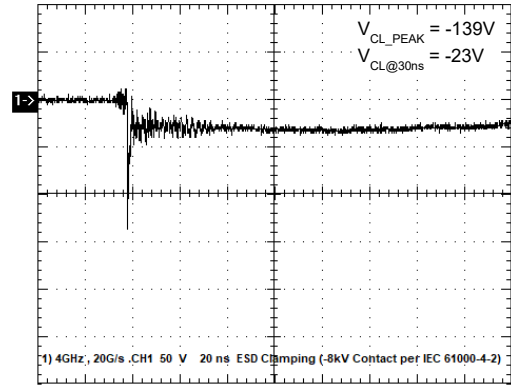


TLP\_Pin1 (+) to Pin2 (-)

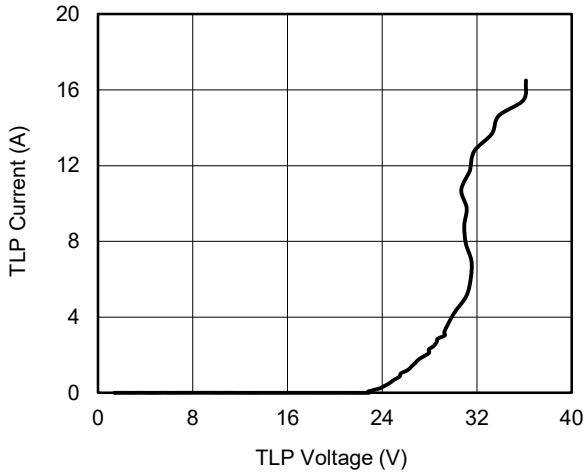


TLP\_Pin1 (-) to Pin2 (+)

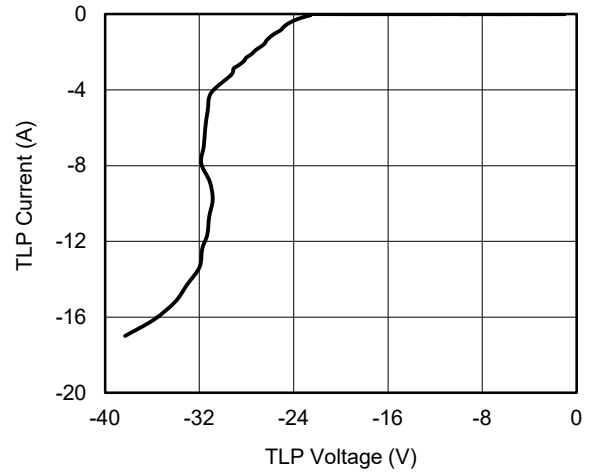




Positive Clamp Voltage vs. Peak Pulse Current ( $t_P = 8/20\mu s$ )

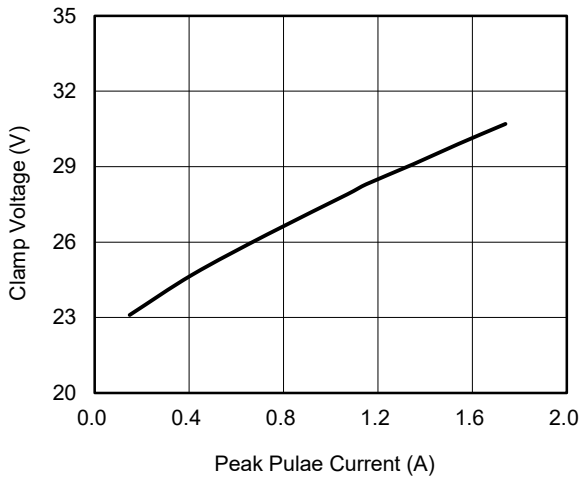

Negative Clamp Voltage vs. Peak Pulse Current ( $t_P = 8/20\mu s$ )

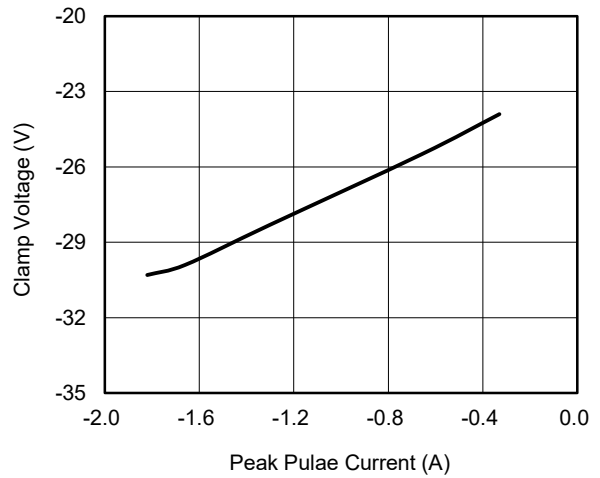


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

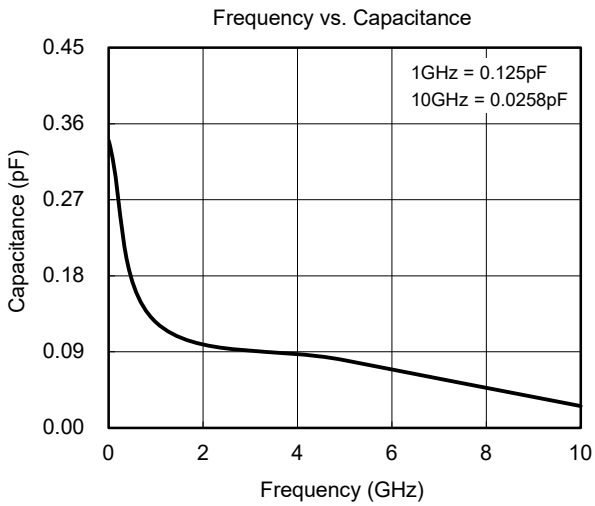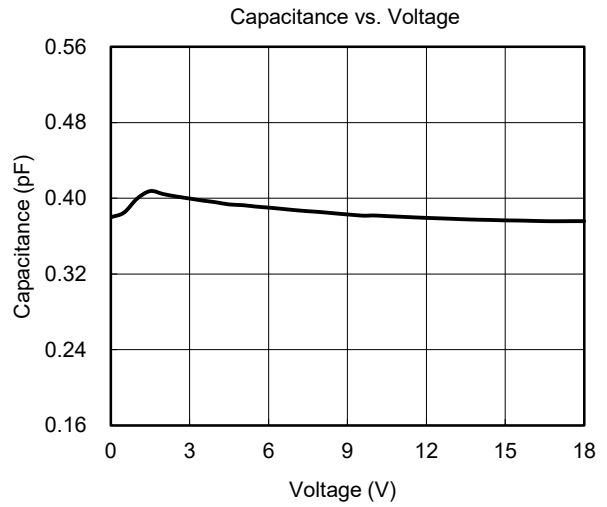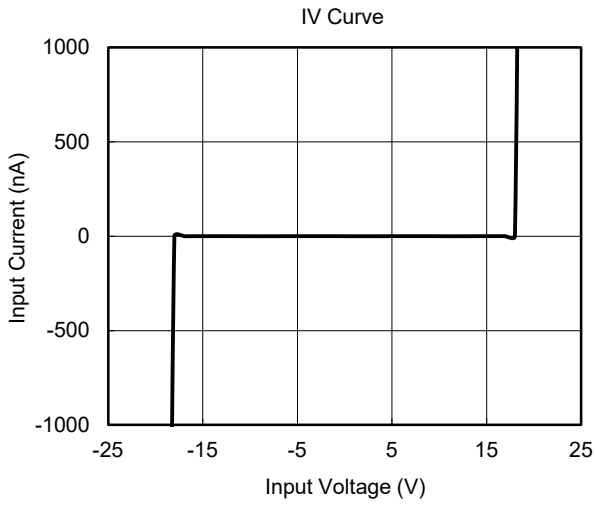

**APPLICATION INFORMATION**

The SGM18UB1E1 is designed to provide a bidirectional line for dissipating ESD events on high-speed signal. And it is suitable for lines with positive and negative signal polarity relative to the ground.

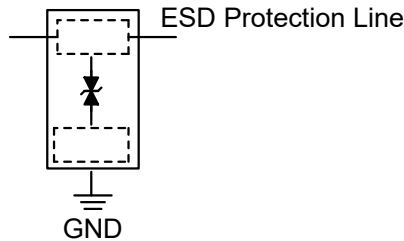

The following guidelines are recommended:

**1. TVS Placement**

Place the SGM18UB1E1 as close to the input connector as possible.

**2. TVS's Trace Layout**

- Avoid running protected traces in parallel with unprotected traces.
- Minimize the path length between the SGM18UB1E1 and the protected line.
- Minimize parallel signal path length.
- Route the protected traces as straight as possible.

**3. GND Layout**

- Avoid using a common ground point shared with the SGM18UB1E1 transient return path.
- Minimize the length of the SGM18UB1E1 transient return path to ground.
- Use ground vias as close as possible to the SGM18UB1E1 transient return to ground.

**REVISION HISTORY**


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>DECEMBER 2025 – REV.A to REV.A.1</b>	<b>Page</b>
Updated electrical characteristics .....	3
Updated typical performance characteristics.....	4, 5
<b>Changes from Original to REV.A (MAY 2025)</b>	<b>Page</b>
Changed from product preview to production data.....	All


# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS


### UTDFN-1×0.6-2L

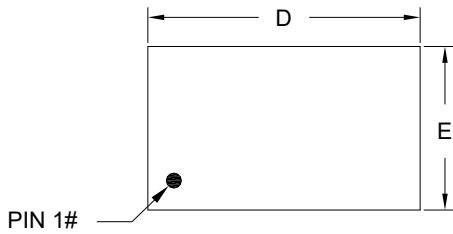


**TOP VIEW**



**BOTTOM VIEW**

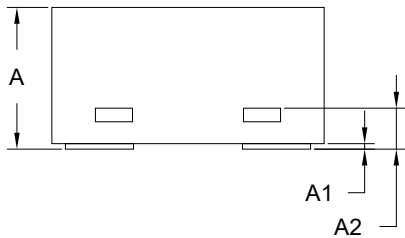

**SIDE VIEW**



**RECOMMENDED LAND PATTERN (Unit: mm)**


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.400	0.500	0.550
A1	0.000	-	0.050
A2	0.120	0.150	0.180
b	0.200	0.250	0.300
D	0.950	1.000	1.050
E	0.550	0.600	0.650
e	0.650 BSC		
L	0.450	0.500	0.550
L1	0.050 REF		

NOTE: This drawing is subject to change without notice.


# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS


### XTDFN-0.6×0.3-2L

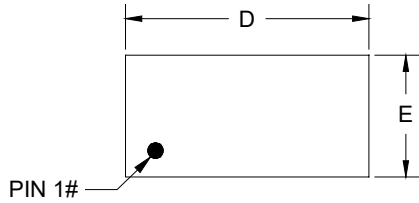


TOP VIEW

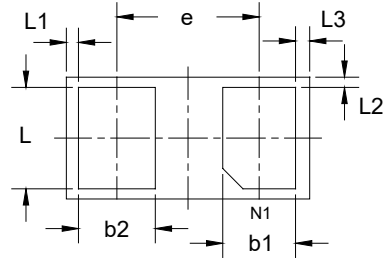

BOTTOM VIEW

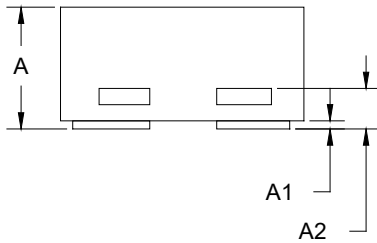

SIDE VIEW



RECOMMENDED LAND PATTERN (Unit: mm)


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.280	0.300	0.320
A1	0.000	0.020	0.050
A2	0.050	0.100	0.150
b1	0.130	0.180	0.230
b2	0.140	0.190	0.240
D	0.550	0.600	0.650
E	0.250	0.300	0.350
e	0.350 BSC		
L	0.200	0.250	0.300
L1	0.030 BSC		
L2	0.025 BSC		
L3	0.035 BSC		

NOTE: This drawing is subject to change without notice.


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

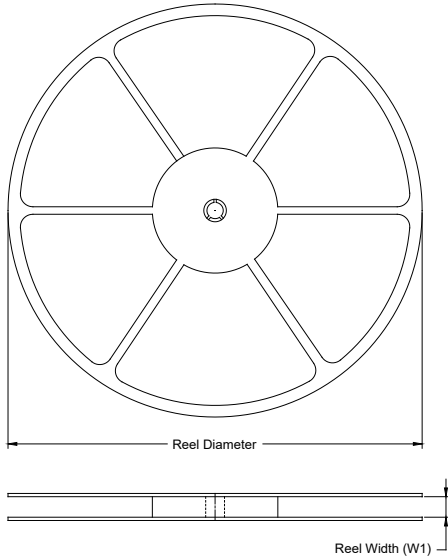

### TAPE DIMENSIONS

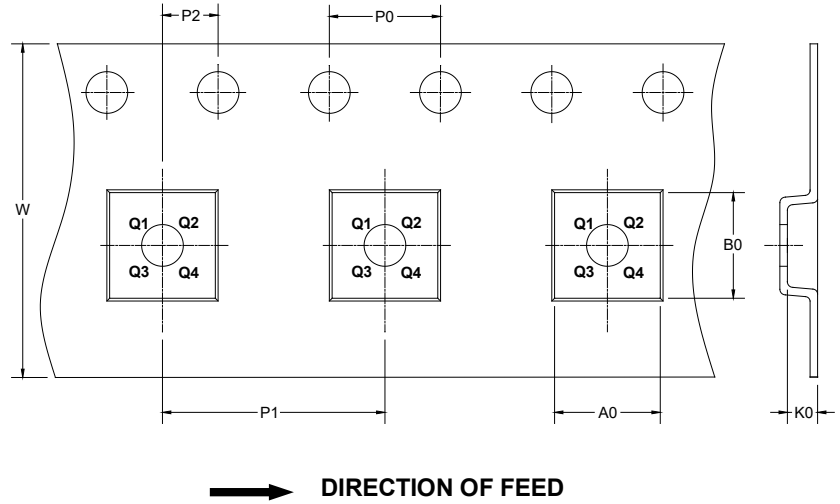

NOTE: The picture is only for reference. Please make the object as the standard.


### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTDFN-1×0.6-2L	7"	8.6	0.70	1.15	0.57	4.0	2.0	2.0	8.0	Q1
XTDFN-0.6×0.3-2L	7"	8.6	0.37	0.67	0.34	4.0	2.0	2.0	8.0	Q1

D00001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS

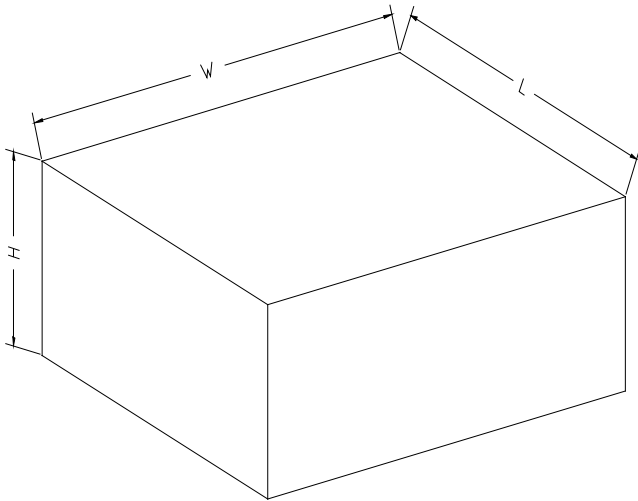

NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002