

GENERAL DESCRIPTION

The SGM41566A and SGM41566B are designed for charging low capacity battery cell with factory-programmable current programmable in the range of 50mA to 750mA from loosen regulated power source. The device features low drop-out constant-current constant-voltage charging, weak battery pre-charging, voltage fold-back safe retaining, floating charging protection and system start-up pre-charge, with NTC sensing protection.

The SGM41566A and SGM41566B are available in a Green TDFN-2×2-8AL package. It operates in -40°C to +125°C junction temperature.

FEATURES

- Loosen Regulated Power Input
- Battery Voltages Option:
25mV Raster in 3.5V to 4.8V Range
- Charging Current Option:
50mA Raster in 50mA to 750mA Range
- 5% to 25% Residual End-of-Charge Option
- Weak Battery Pre-Charge Option
- Voltage Fold-Back Safe Power Retaining
- NTC Temperature Sensing for Protection
- Floating Charging Protection
- 650ms Power Recycle Certification
- Exhausted Battery Charging Inhibition
- Pre-Charging Power-Up at Normal Voltage
- Available in a Green TDFN-2×2-8AL Package

APPLICATIONS

Low Capacity Rechargeable Battery Powered Applications

TYPICAL APPLICATION

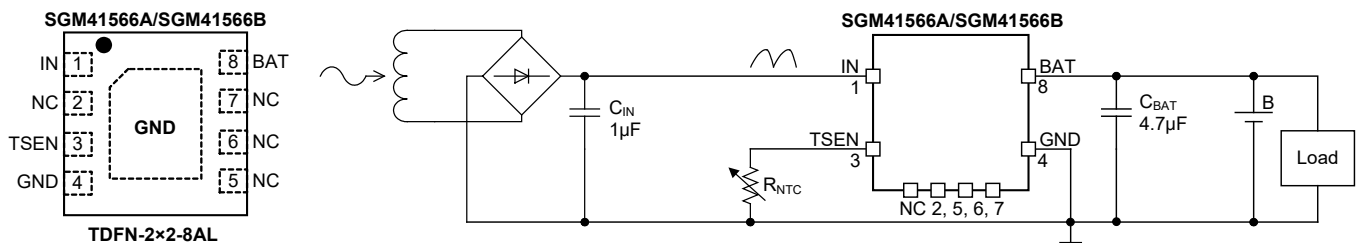



Figure 1. Typical Application Circuit

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM41566A-360F41	TDFN-2×2-8AL	-40°C to +125°C	SGM41566A-360F41XTDE8G/TR	0KI XXXX	Tape and Reel, 3000
SGM41566A-360N21	TDFN-2×2-8AL	-40°C to +125°C	SGM41566A-360N21XTDE8G/TR	0GE XXXX	Tape and Reel, 3000
			SGM41566A-360N21XTDE8DG/TR	0GE XXXX	Tape and Reel, 3000
SGM41566B-405N21	TDFN-2×2-8AL	-40°C to +125°C	SGM41566B-405N21XTDE8G/TR	0GF XXXX	Tape and Reel, 3000
			SGM41566B-405N21XTDE8DG/TR	0GF XXXX	Tape and Reel, 3000
SGM41566B-430N21	TDFN-2×2-8AL	-40°C to +125°C	SGM41566B-430N21XTDE8G/TR	27P XXXX	Tape and Reel, 3000
			SGM41566B-430N21XTDE8DG/TR	27P XXXX	Tape and Reel, 3000

MARKING INFORMATION

NOTE: XXXX = Date Code, Trace Code and Vendor Code.

YYY — Serial Number
XXXX


Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

IN to GND -0.3V to 28V
 IN Clamp Current or Voltage ⁽¹⁾ 10mA or 28V
 BAT to GND (When $V_{IN} > V_{BAT}$) -0.3V to 20V
 BAT to GND (When $V_{IN} \leq V_{BAT}$) -0.3V to 4.8V
 TSEN to GND -0.3V to 6V
 TSEN Clamp Current or Voltage ⁽¹⁾ 0.3mA or 6V
 Package Thermal Resistance
 TDFN-2×2-8AL, θ_{JA} 95°C/W
 TDFN-2×2-8AL, θ_{JB} 47°C/W
 TDFN-2×2-8AL, $\theta_{JC(TOP)}$ 84°C/W
 TDFN-2×2-8AL, $\theta_{JC(BOT)}$ 9°C/W
 Junction Temperature +150°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (Soldering, 10s) +260°C
 ESD Susceptibility
 HBM 8000V
 CDM 1000V

RECOMMENDED OPERATING CONDITIONS

Supply Voltage Range 2.9V to 19.5V
 IN Clamp Current or Voltage ⁽¹⁾ 10mA or 19.5V
 TSEN Clamp Current or Voltage ⁽¹⁾ 0.3mA or 5.5V
 Input Effective Capacitance, C_{IN} 0.1μF to 12μF
 Output Effective Capacitance, C_{BAT} 1μF to 12μF
 Operating Junction Temperature Range -40°C to +125°C

NOTE:

1. The current limit and voltage limit are set for those values which applies onto the IN or TSEN pin current and voltage source for 10 minutes and should not cause any change to key operation parameters.

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all


integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.


SUFFIX CODE FOR CHARGE VOLTAGE AND CHARGE CURRENT

Surfix: vvvZmn

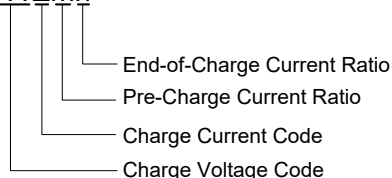

Model: SGM41566A/SGM41566B-vvvZmn							
Charge Voltage (Option Code "vvv")				Charge Current (Option Code "Z")		Pre-Charge Ratio (to Charge Current) (Option Code "m")	
Code	Voltage (V)	Code	Voltage (V)	Code	Current (mA)	Code	Current Ratio (%)
350	3.500	438	4.375	A	50	0	No pre-charge
355	3.550	440	4.400	B	100	1	5
360	3.600	443	4.425	C	150	2	10
365	3.650	445	4.450	D	200	3	15
370	3.700	448	4.475	E	250	4	20
375	3.750	450	4.500	F	300	5	25
380	3.800	453	4.525	G	350	End-of-Charge Ratio (to Charge Current) (Option Code "n")	
385	3.850	455	4.550	H	400		
390	3.900	458	4.575	P	450		
395	3.950	460	4.600	J	500	Code	Current Ratio (%)
400	4.000	463	4.625	K	550	1	5
405	4.050	465	4.650	L	600	2	10
410	4.100	468	4.675	M	650	3	15
415	4.150	470	4.700	N	700	4	20
420	4.200	473	4.725	R	750	5	25
425	4.250	475	4.750				
430	4.300	478	4.775				
433	4.325	480	4.800				
435	4.350						

PIN CONFIGURATION

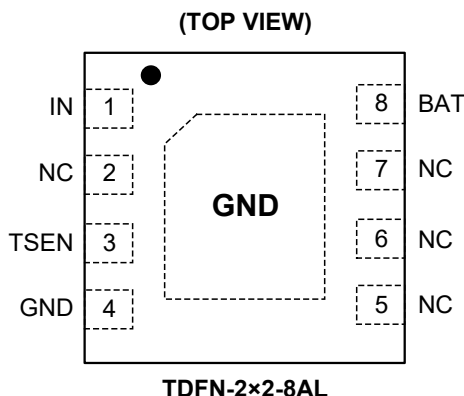

PIN DESCRIPTION

PIN	NAME	TYPE	FUNCTION
1	IN	P	Charge Power Input for Powering this Device and Feeding to the Charge Output. The capacitor with effective capacitance in the range of 0.1 μ F to 12 μ F is recommended. It should be placed close to this pin for decoupling.
3	TSEN	IO	Temperature Sensing and Enable Input. The external connection to this pin is checked, once power input voltage is in the effective range by feeding current (38.6 μ A) out of the pin. If the pin voltage is less than V_{ENL} (102mV), it is considered as being grounded. The charging function is disabled while the feeding current is reduced to about 25.5 μ A. If the pin voltage is higher than V_{ENH} (2.68V), charging function is enabled. If the pin voltage is between V_{ENL} and V_{ENH} , it is considered that the NTC thermistor is connected, and the ground resistance is evaluated for temperature safe charging. In this case, charging is allowed, only when the pin voltage is within the range of hot threshold resistance related voltage V_{HOT} to cold threshold related voltage V_{COLD} . The feeding current biases the pin voltage to be higher than V_{COLD} but less than V_{ENH} . If pin voltage in this range is found, it is considered to be excessive cold condition or NTC connection open, charge function is disabled.
4	GND	G	Ground of the Circuit.
8	BAT	O	Output to the Battery and/or System Load for Charging and/or Powering the System Load. The output decoupling capacitor with effective capacitance in the range of 1 μ F to 12 μ F is recommended. The pin sinks about 4 μ A if the pin voltage is higher than charging voltage, and the pin sinks about 1.5mA if output clamp is triggered.
2, 5, 6, 7	NC	NC	No Internal Connection.
Exposed Pad	GND	—	Exposed Pad. Exposed pad is internally connected to GND. Connect it to a large ground plane to maximize thermal dissipation.

NOTE: P = power, IO = input and output, G = ground, O = output, NC = no connection.

ELECTRICAL CHARACTERISTICS

(Typical values are characterized at $T_J = +25^\circ\text{C}$, limits are guaranteed in T_J range of -40°C to $+125^\circ\text{C}$ by design and product characterization statistical estimation, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Input Voltage Range	V _{IN}			2.9		19.5	V
Charge Voltage Range	V _{CHG}	V _{CHG} option range		3.5		4.8	V
Low Voltage Charging Inhibition Voltage Threshold	V _{INH}	SGM41566A	V _{BAT} rising	1.12	1.21	1.30	V
			V _{BAT} falling	1.03	1.12	1.21	
		SGM41566B	V _{BAT} rising	2.12	2.22	2.30	V
			V _{BAT} falling	1.92	2.01	2.10	
Charge Current Range	I _{CHG}	I _{CHG} option range		50		750	mA
Input Clamp Voltage	V _{OV}	I _{IN} = 10mA, T _J = -40°C to T _{FOLD}		20	21	22	V
Input Clamp Current	I _{OV}	V _{IN} = 22V, T _J = -40°C to T _{FOLD}		18	26	33	mA
Pass On-Resistance	R _{ON}	I _{IN} = 90% × I _{CHG} , V _{BAT} = 3V, I _{CHG} ≥ 200mA			0.6	1.1	Ω
BAT Pin Sink Current ⁽¹⁾	I _{STANDBY}	V _{BAT} = 95% × V _{CHG} , I _N floating, T _J = -40°C to +85°C			1	3	μA
		V _{BAT} = 95% × V _{CHG} , V _{TSEN} = 0V, T _J = -40°C to +85°C			1	6	
		V _{BAT} = 95% × V _{CHG} , T _{SEN} floating, T _J = -40°C to +85°C			2.4	8	
Input Current	I _Q	V _{TSEN} = 0V, charging disabled			66	95	μA
		V _{TSEN} = 5V, charging terminated			80	125	
		V _{TSEN} = 0.4V, charging terminated			125	180	
In-Charging Current	I _{GND}	V _{BAT} = 90% × V _{CHG} , GND current during charge			0.4% × I _{BAT}		mA
Under-Voltage Lockout Thresholds	V _{UVLOr}	V _{IN} rising		2.65	2.74	2.82	V
	V _{UVLOf}	V _{IN} falling		2.33	2.42	2.50	
IN-BAT Offset Voltage	V _{OS}	I _{IN} = 0.3mA to 80mA, V _{BAT} = 90% × V _{CHG}		35	80	120	mV
IN-BAT Forward Threshold Voltage ⁽²⁾	V _{DH}	V _{BAT} = 3V, I _{CHG} ≤ 200mA, charge current rise to 95% × I _{CHG}			130	260	mV
IN-BAT Reverse Threshold Voltage	V _{DL}				22		mV
BAT Discharge Current	I _{OV_BAT}	V _{BAT} = 104% × V _{CHG}		1	1.5	2	mA
Normal Charge, Charge Termination							
Charge Voltage	V _{CHG}	Option voltage raster step			25		mV
Charge Voltage Accuracy ⁽³⁾		I _{BAT} = 1mA	T _J = +25°C	-20		20	mV
			T _J = +2°C to +43°C	-25		25	
			T _J = -40°C to +85°C	-32		28	
			T _J = +85°C to T _{FOLD}			35	
Floating Drop Ratio	V _{FCHG} /V _{CHG}	Percentage drop to the V _{CHG}		1.5	2	2.5	%
Recharge Drop Ratio	V _{RECHG} /V _{CHG}	Percentage drop to the V _{CHG}		2.6	4	5.2	%
Pre-Charge Voltage Ratio	V _{PRECHG} /V _{CHG}	Percentage to the V _{CHG}		62.5	65	67	%
Charge Current	I _{CHG}	Option current raster step			50		mA
Charge Current Accuracy ⁽³⁾		V _{BAT} = 90% × V _{CHG} , I _{CHG} < 150mA	T _J = +25°C	-8		8	%
			T _J = -40°C to +85°C	-10		10	
			T _J = +85°C to T _{FOLD}			12	
		V _{BAT} = 90% × V _{CHG} , I _{CHG} ≥ 150mA	T _J = +25°C	-5		5	%
			T _J = -40°C to +85°C	-7		7	
			T _J = +85°C to T _{FOLD}			12	

ELECTRICAL CHARACTERISTICS (continued)

(Typical values are characterized at $T_J = +25^\circ\text{C}$, limits are guaranteed in T_J range of -40°C to $+125^\circ\text{C}$ by design and product characterization statistical estimation, unless otherwise noted.)







PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
Normal Charge, Charge Termination							
Pre-Charge Current Ratio	I_{PRE}/I_{CHG}	Percentage to the I_{CHG} , $T_J = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	Ratio = 5%	2.8	5	7.2	%
			Ratio = 10%	7.0	10	13.0	
			Ratio = 15%	11.5	15	18.5	
			Ratio = 20%	15.5	20	24.5	
			Ratio = 25%	19.5	25	30.5	
End-of-Charge Current Ratio	I_{EOC}/I_{CHG}	Percentage to the I_{CHG} , $T_J = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$	Ratio = 5%	3.0	4.8	6.6	%
			Ratio = 10%	7.4	9.8	12.2	
			Ratio = 15%	11.2	14.8	18.4	
			Ratio = 20%	15.2	19.6	24.0	
			Ratio = 25%	19.0	24	29.0	
Timings for Charge-Recycle, Floating Charge, Charge Termination							
Charging Recycle Time ⁽⁵⁾	t_{HOLD}	The time holds previous charging state before recycle			650		ms
Floating Charge Time ^{(4) (5)}	t_{FLT}	Floating time for $t_{\text{FLT}}/2 \sim t_{\text{FLT}}$ for charge termination, $T_J = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$		37	45	53	min
Pre-Charge Safety Time ^{(4) (5)}	t_{SAFE}	$T_J = -40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$		74	94	114	min
Operation Conditions and Limits							
NTC Sensing Current	$I_{\text{NTC_EN}}$	$V_{\text{TSEN}} = V_{\text{HOT}}$ to V_{COLD}		37.2	38.6	40.2	μA
	$I_{\text{NTC_DIS}}$	$V_{\text{TSEN}} = 0\text{V}$		24.0	25.5	27.0	
Equivalent Resistance	$R_{0.5^{\circ}\text{C}}$	Reference to the NCP15XH103F03RC ($\beta 3380$)		26.74	27.37	28.00	$\text{k}\Omega$
	$R_{45^{\circ}\text{C}}$			4.836	4.95	5.064	
NTC Dismissal Threshold	V_{ENH}	TSEN rising		2.54	2.68	2.85	V
NTC Dismissal Threshold Hysteresis	V_{ENHHYS}	TSEN falling			30		mV
NTC Cold Threshold	V_{COLD}	TSEN rising		1.035	1.057	1.080	V
Cold Threshold Hysteresis	V_{COLDHYS}	TSEN falling			165		mV
NTC Hot Threshold	V_{HOT}	TSEN falling		182	191	200	mV
Hot Threshold Hysteresis	V_{HOTHYS}	TSEN rising			33		mV
Shutdown Threshold	V_{ENL}	TSEN falling		92	102	112	mV
Shutdown Threshold Hysteresis	V_{ENLHYS}	TSEN rising			15		mV
Thermal Fold-Back Start Threshold	T_{FOLD}	Fold-back starting temperature			130		$^{\circ}\text{C}$
Fold-Back Termination Temperature	T_{TERM}	V_{CHG} or I_{CHG} falls to 0.5V or 0.5mA			150		$^{\circ}\text{C}$

NOTES:

1. Forced leakage may occur when temperature is higher than $+85^\circ\text{C}$ for battery over-voltage free.
2. $V_{IN} - V_{BAT}$ need more than $95\% \times I_{CHG} \times R_{ON}$ when $I_{CHG} > 200\text{mA}$.
3. Both charge voltage and charge current are designed to drop in the temperature range over $+130^\circ\text{C}$ and either charge voltage or charge current drops to zero by T_{FOLD} .
4. Timings may vary beyond the limits over $+85^\circ\text{C}$ but functionality keeps.
5. Guaranteed by design and characterization. Not production tested.







TYPICAL PERFORMANCE CHARACTERISTICS

Measured on SGM41566A-360F41, $V_{IN} = 5V$, $V_{TSEN} = 0.4V$, $T_J = +25^\circ C$, unless otherwise noted.

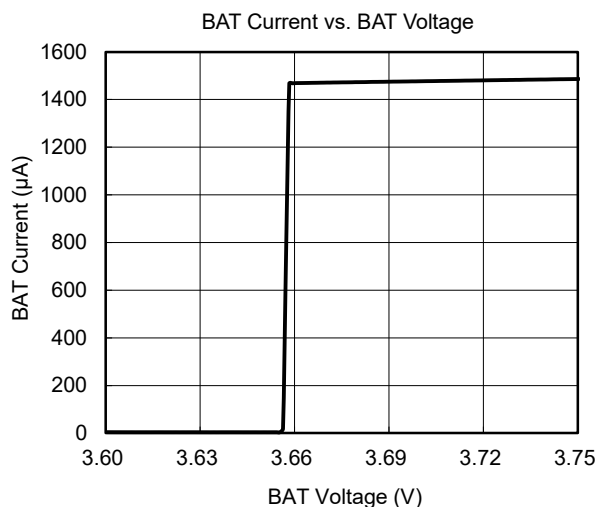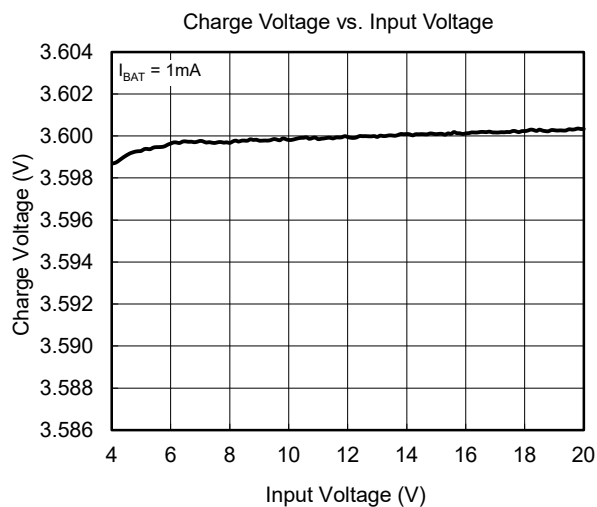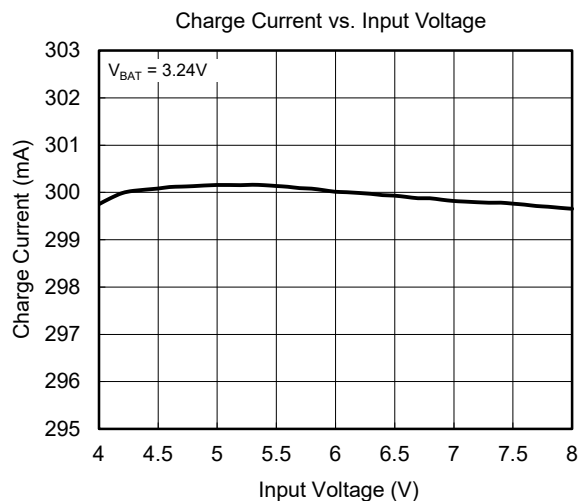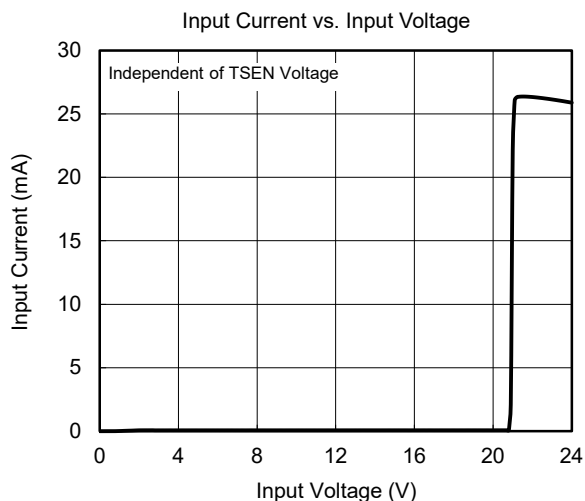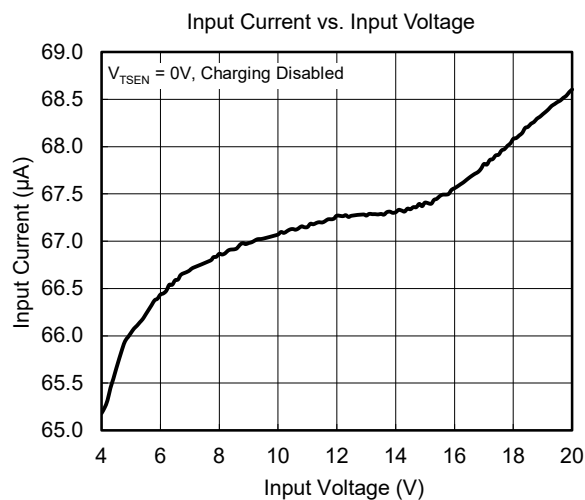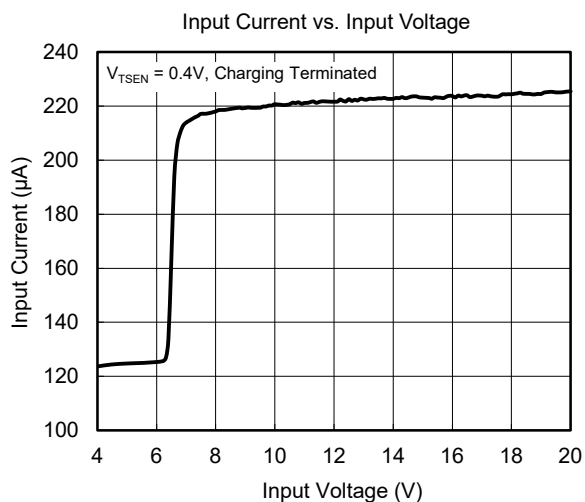







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Measured on SGM41566A-360F41, $V_{IN} = 5V$, $V_{TSEN} = 0.4V$, $T_J = +25^{\circ}C$, unless otherwise noted.

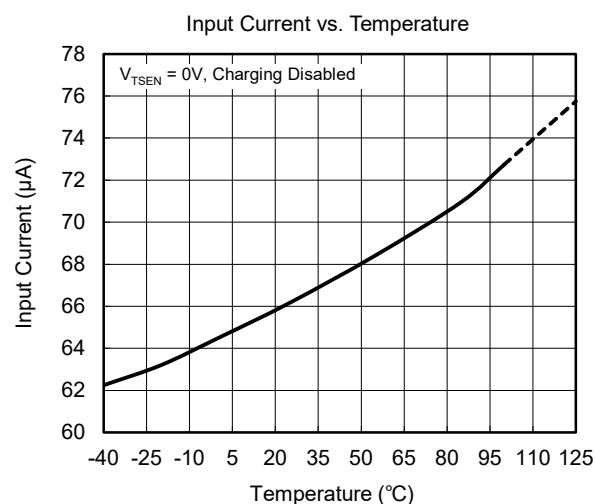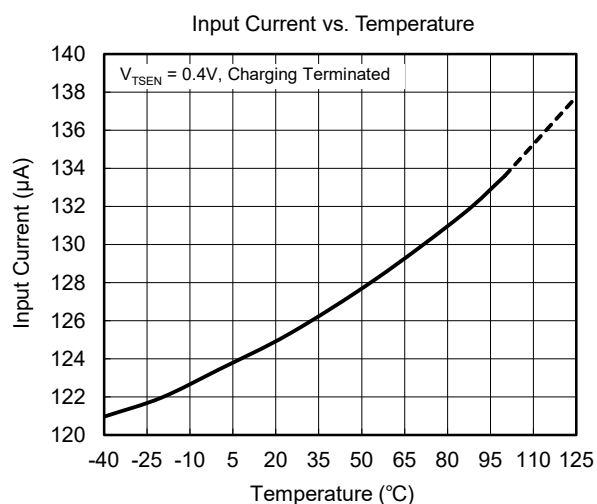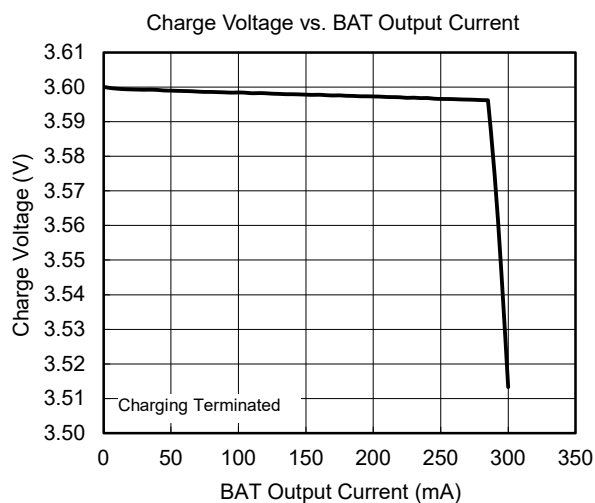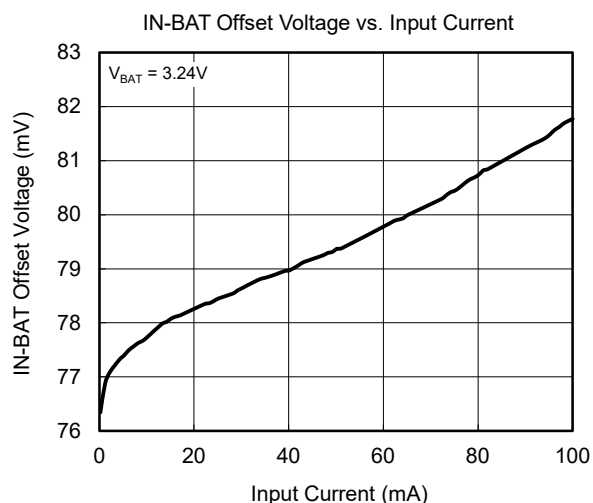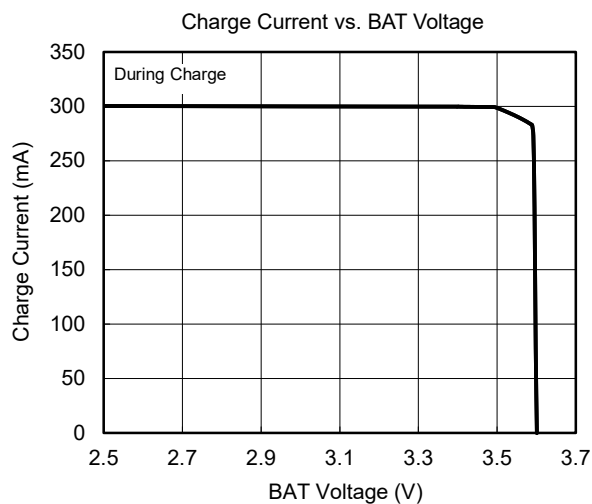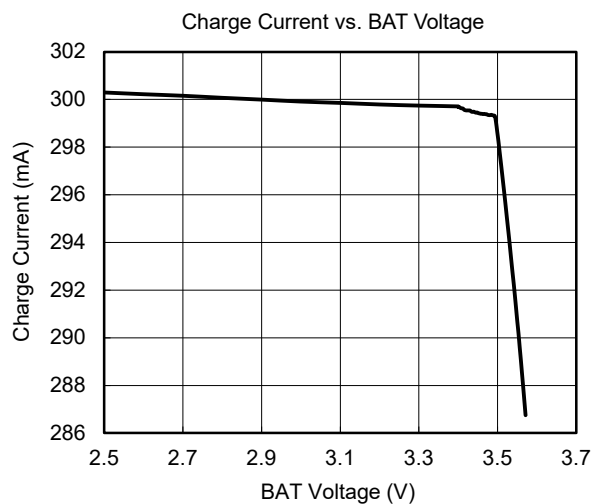







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Measured on SGM41566A-360F41, $V_{IN} = 5V$, $V_{TSEN} = 0.4V$, $T_J = +25^\circ C$, unless otherwise noted.

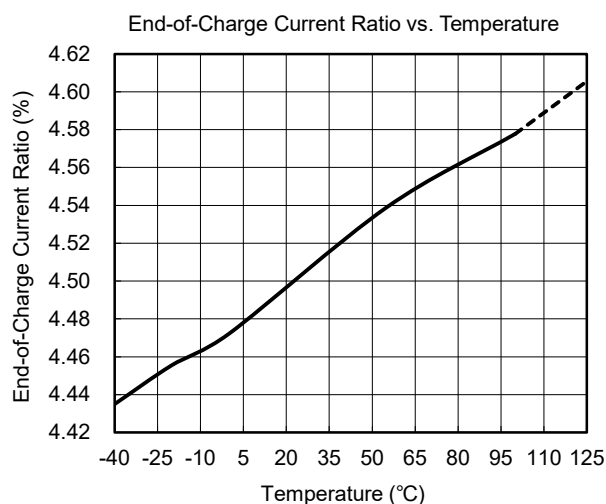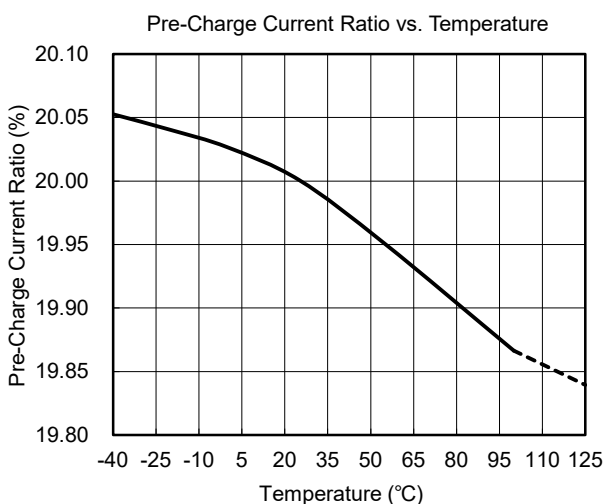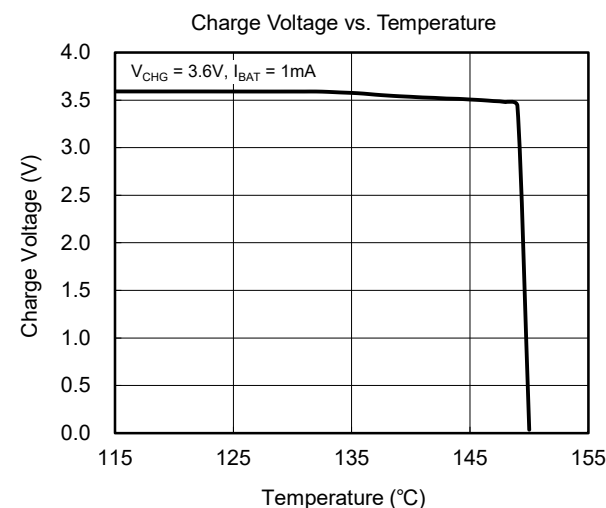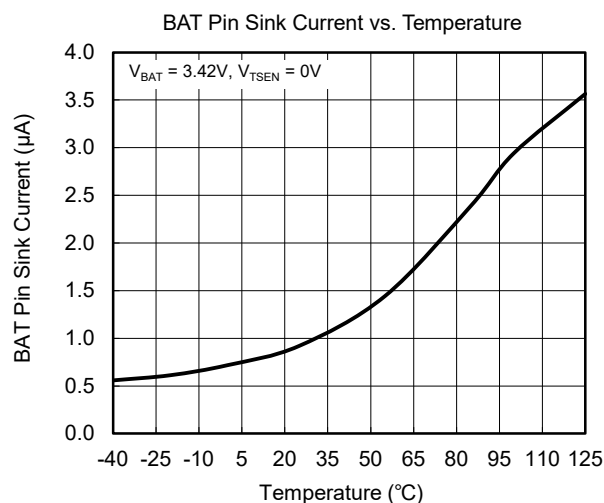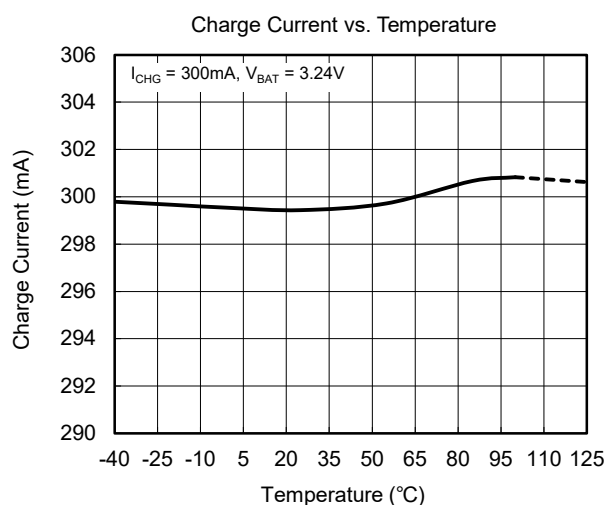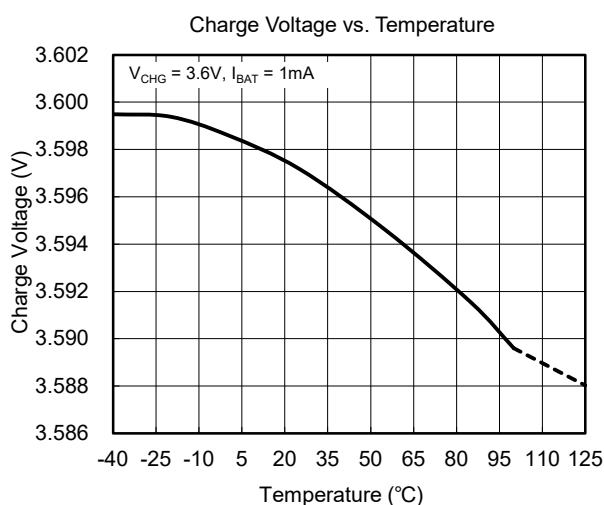







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Measured on SGM41566A-360F41, $V_{IN} = 5V$, $V_{TSEN} = 0.4V$, $T_J = +25^\circ C$, unless otherwise noted.

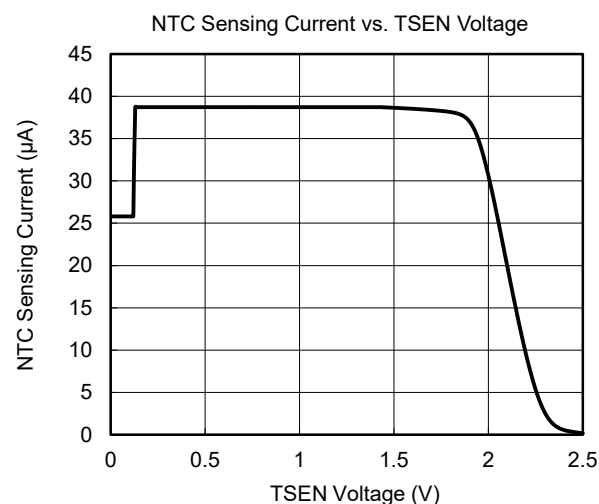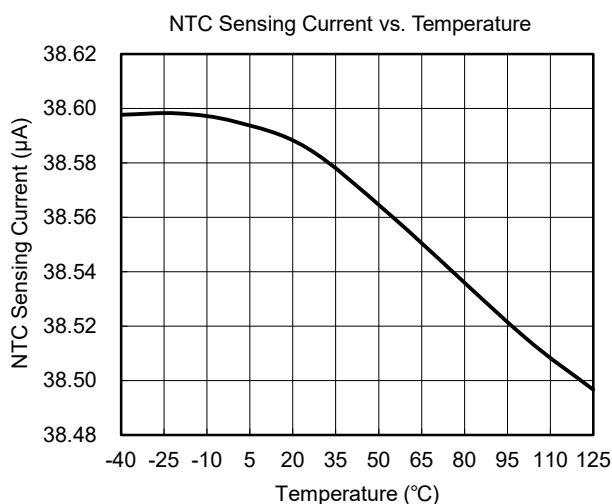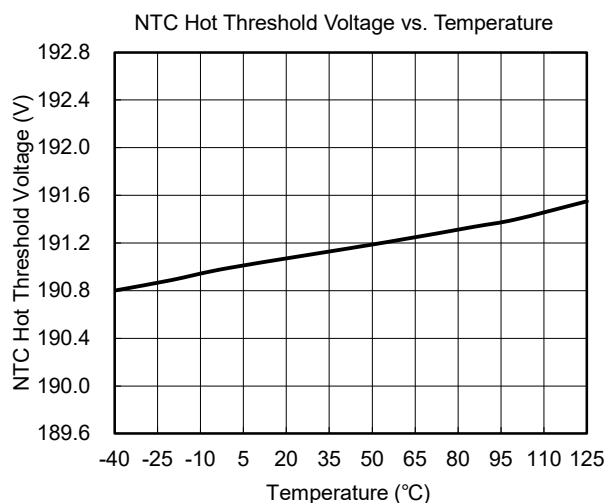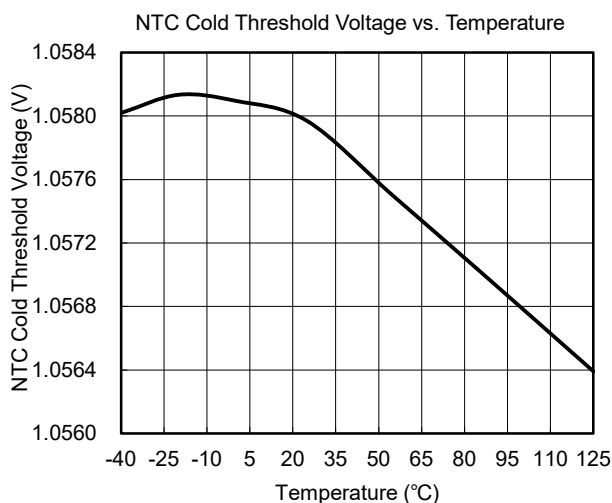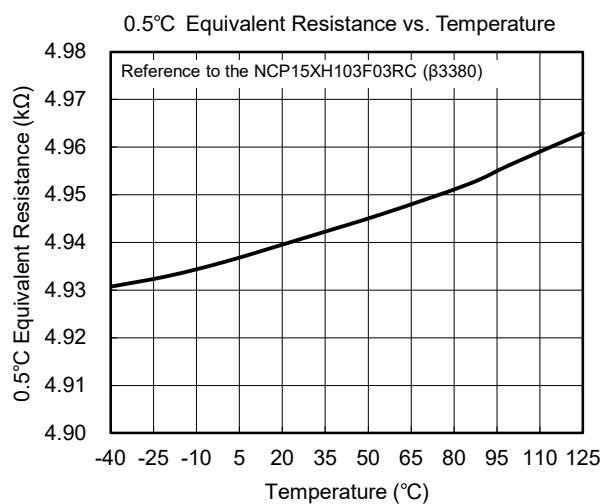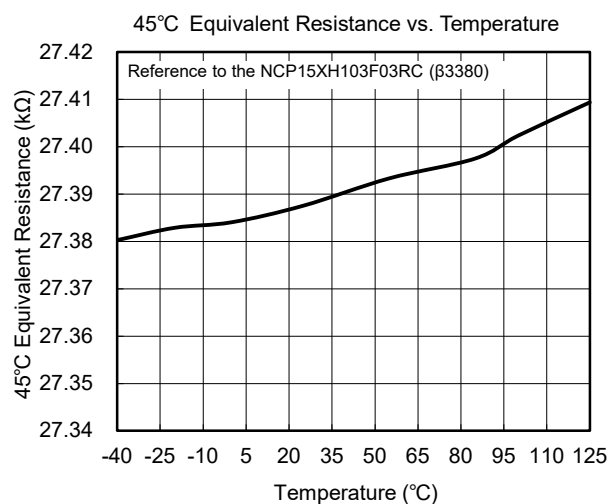



TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Measured on SGM41566A-360F41, $V_{IN} = 5V$, $V_{TSEN} = 0.4V$, $T_J = +25^\circ C$, unless otherwise noted.

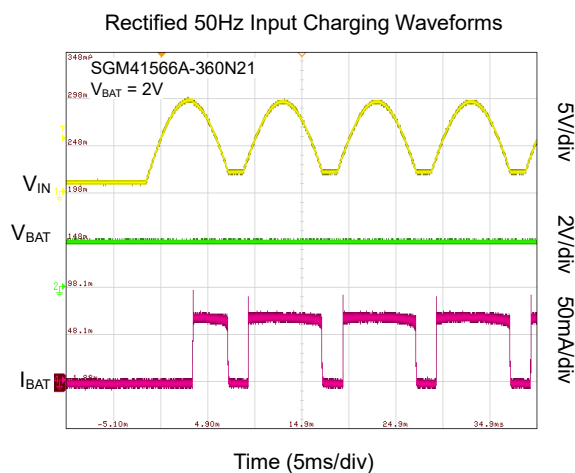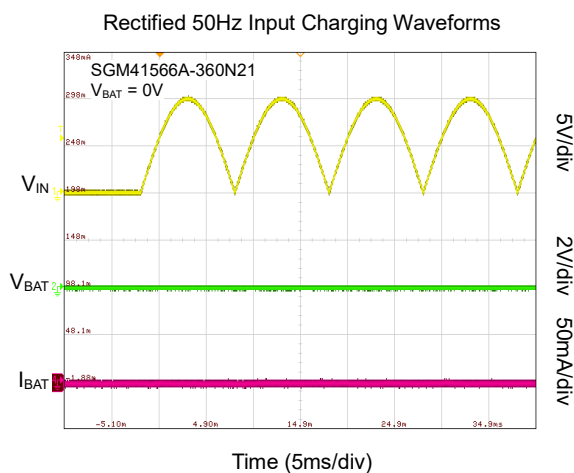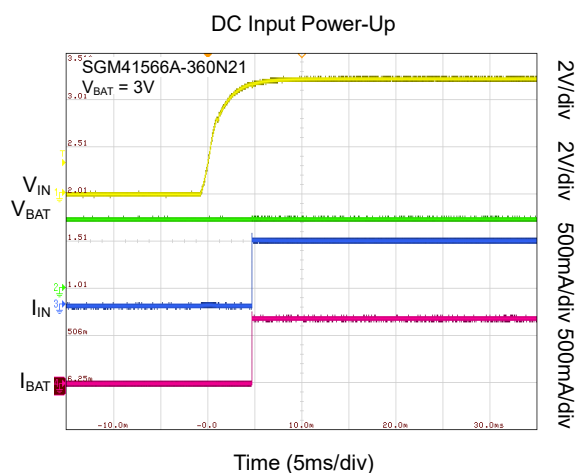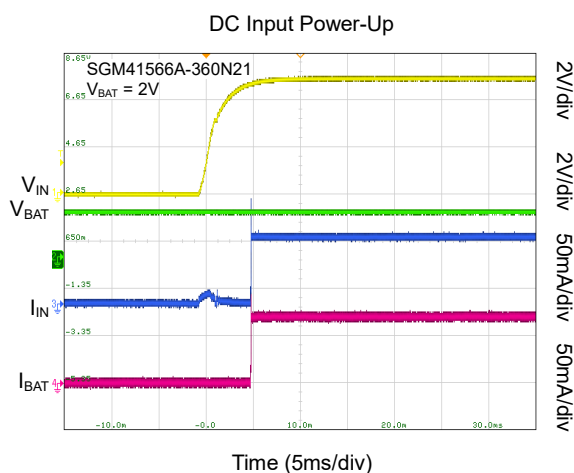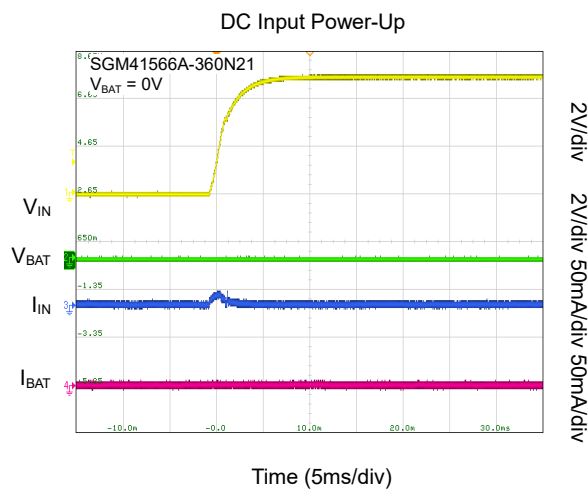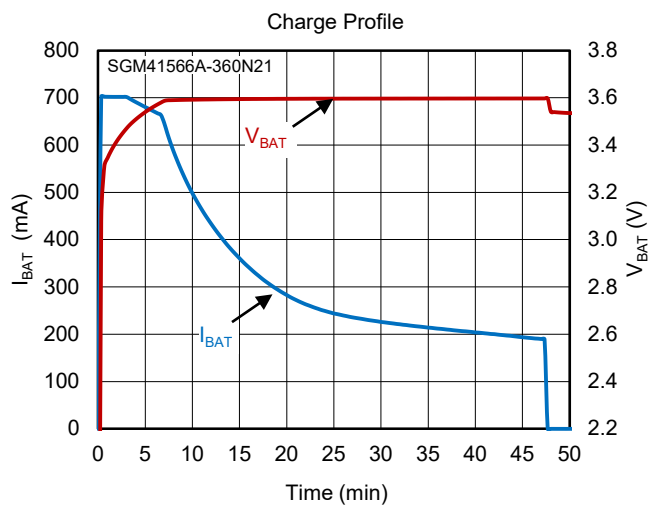

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

Measured on SGM41566A-360F41, $V_{IN} = 5V$, $V_{TSEN} = 0.4V$, $T_J = +25^{\circ}C$, unless otherwise noted.

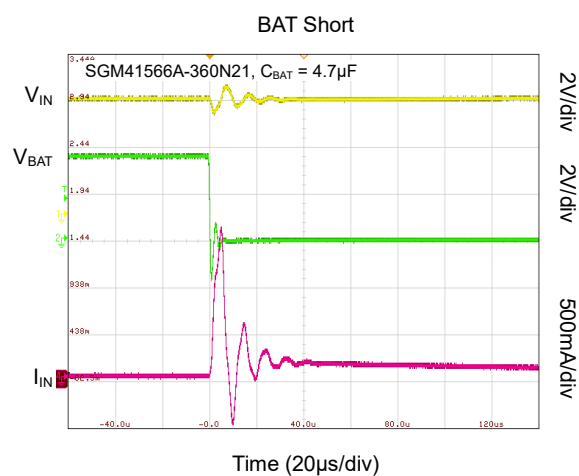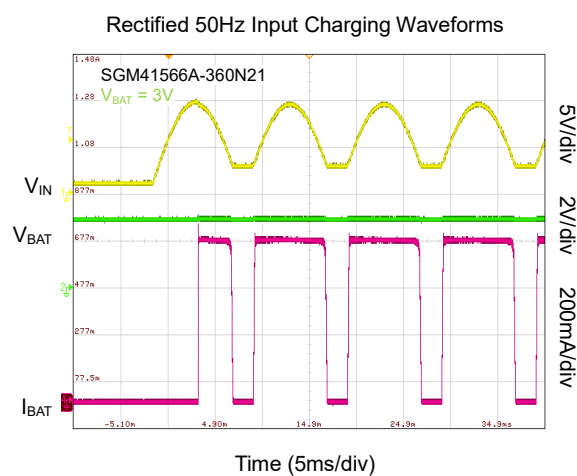

CHARGE CYCLE DIAGRAM

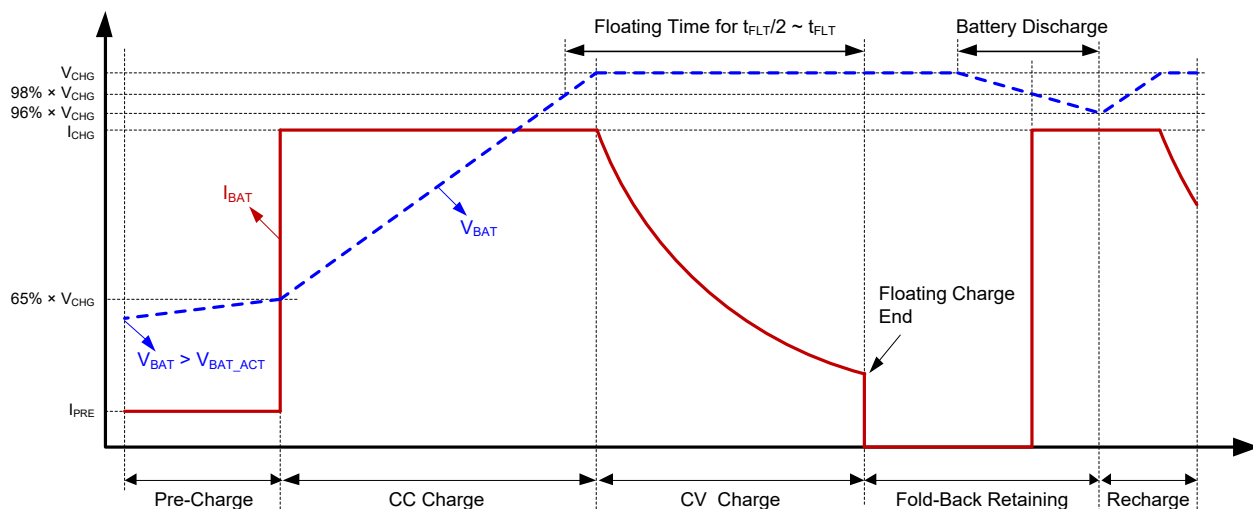


Figure 2. Not-Time Scaled Illustrative Charge Profile

FUNCTIONAL BLOCK DIAGRAM

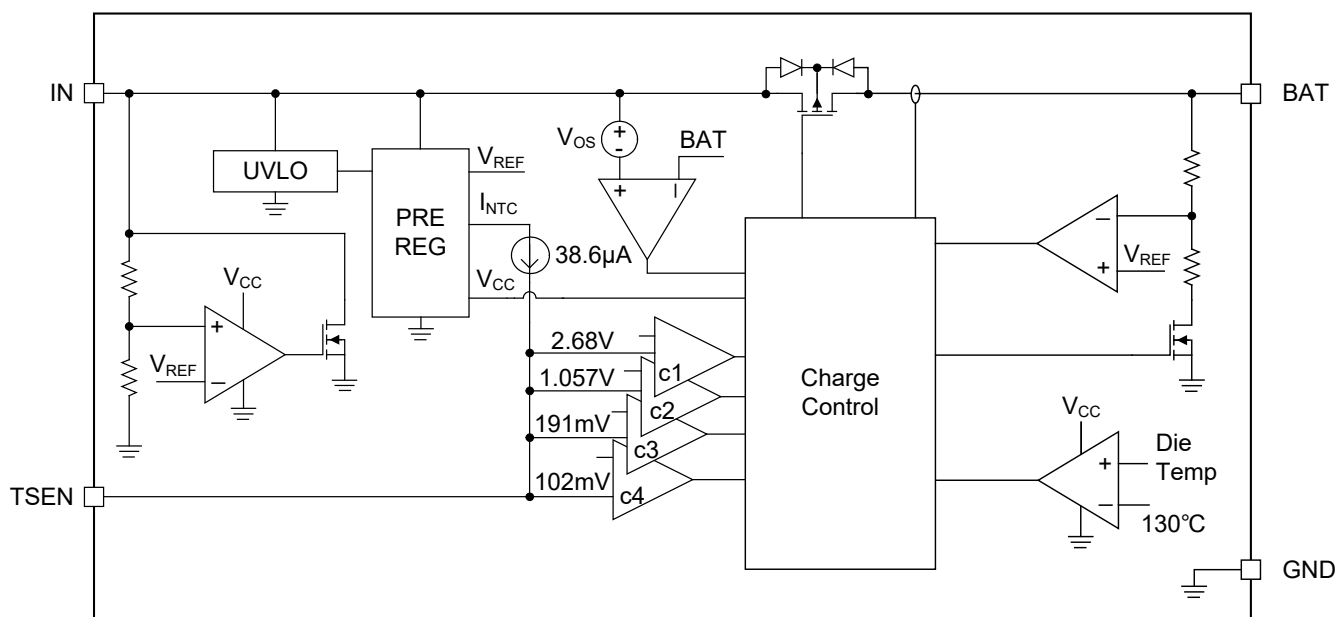


Figure 3. Block Diagram

DETAILED DESCRIPTION

The SGM41566A and SGM41566B are the constant-voltage and constant-current profile charge regulator with the input condition check. It features with input clamp, output clamp, die temperature regulation, NTC temperature-oriented protection and floating charging protection. As shown in Figure 1, there are only few external components desired. Figure 2 shows the illustrative charge profiles.

Exhausted Battery Charging Inhibition

If the voltage at BAT pin is below V_{INH} once the charging input is applied on the IN pin, the charging does not start, which assures no risk charging to an exhausted battery.

Wide Charge Available Input Range

Charging is kept when the input voltage is higher than the nominal input range, or when the supply cannot keep voltage and current stable. The charge current is regulated to prevent over-heating when the input voltage is at the higher range end, and it keeps conduction and maintains minimum forward drop-out when the input voltage is at the lower range end. It can charge from pulse train input such as half-sine wave of rectified AC and slow change source like solar cell photo-voltage, while it keeps charge state flags until the internal bias losses or the input stays low for long enough.

Voltage Fold-Back Power Retaining

When the end-of-charge condition is certified, it lowers the output to the safe voltage V_{FCHG} , while keeping the current limit at the level of normal charge and retaining power to the load system. The design avoids frequent discharging and recharging cycling in the situation that charge supply is always attached.

Minimum Floating Charge Time

When the charging current with high system load that sinks more than the residual end-of-charge current and the battery voltage stays higher than the floating charge voltage for over t_{FLT} duration, the battery will stop charging and enter the end-of-charge fold-back power retaining state. As a weak source, it may also cause the current to fall to less than the residual end-of-charge current, and minimum floating charge time $> t_{FLT}/2$ is a part of condition for full-of-charge certification.

Over-Temperature Charge Regulation

The device senses the die temperature. The thermal fold-back function starts to reduce the charge current when the internal temperature reaches the typical value of $+130^{\circ}\text{C}$.

BAT Over-Voltage Protection

When any leakage or transient pulls V_{BAT} higher than $104\% \times V_{CHG}$ in charge, the BAT sinks current with 1.5mA clamp current for protection.

Full-of-Charge and Input Clamp

When the full-of-charge is certified, the input I_{IN} drops low and the output voltage steps down from V_{CHG} to V_{FCHG} . The sudden current changes the signals to the source side for turning into the full-of-charge state, and the source side can read the state by checking the output voltage or current. In case of wireless or contactless charging with high open load voltage, the device clamps its input voltage to about 21V with 26mA sinking.

NTC Temperature Sensing and Enable

The TSEN sources current (38.6 μA) is used to read ground resistance for temperature-oriented protection. A grounded NTC thermistor is connected to the TSEN pin for temperature sensing. Charging is allowed only when the temperature is in suitable range. When a $\beta 3380 R_{25} 10\text{k}\Omega$ NTC is used, the precise upper and lower thresholds are 45°C and 0.5°C , respectively.

Pull the TSEN to ground to disable charge function, and pull the TSEN to high voltage $> 2.68\text{V}$ to dismiss the temperature-oriented protection function, while enables charge.

Pre-Charge Safety Time

To avoid further damage to bad battery or wrong system load, if the BAT pin voltage cannot reach $65\% \times V_{CHG}$ for over t_{SAFE} (94 minutes), the charging will be stopped.


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

JUNE 2025 – REV.A.1 to REV.A.2	Page
Updated Suffix Code for Charge Voltage and Charge Current section	3
MAY 2025 – REV.A to REV.A.1	Page
Updated Package/Ordering Information section.....	2
Updated Tape and Reel Information section	17
Changes from Original (JULY 2023) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS

TDFN-2×2-8AL

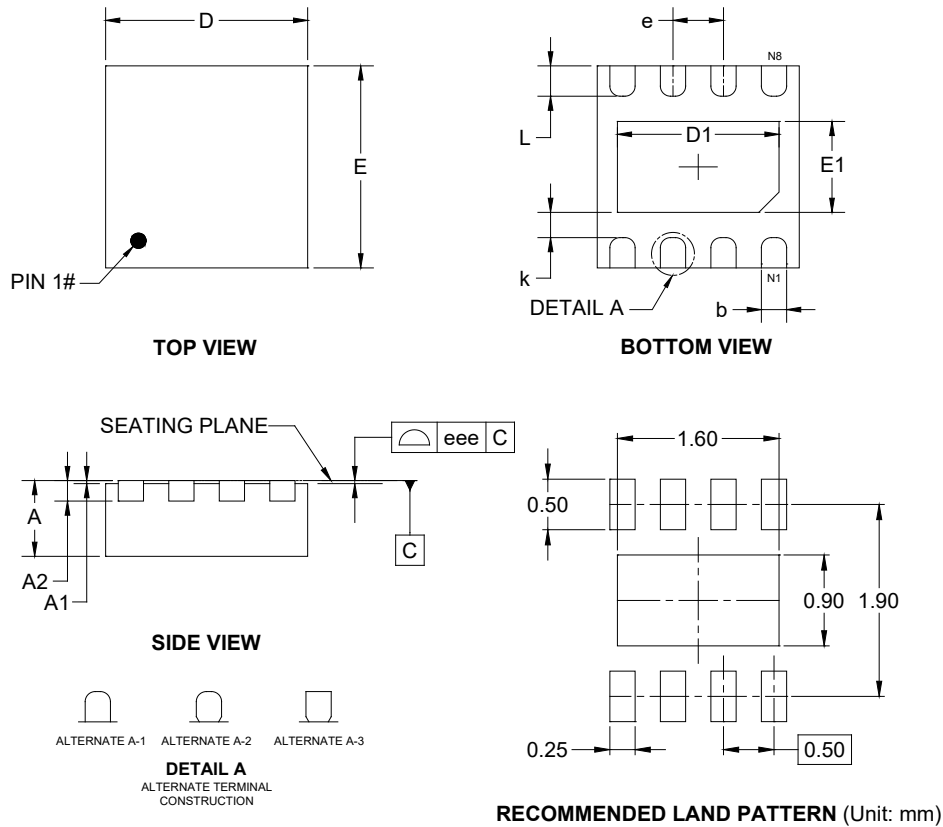


Symbol	Dimensions In Millimeters		
	MIN	NOM	MAX
A	0.700	-	0.800
A1	0.000	-	0.050
A2	0.203 REF		
b	0.200	-	0.300
D	1.900	-	2.100
D1	1.450	-	1.700
E	1.900	-	2.100
E1	0.750	-	1.000
k	0.200	-	-
e	0.500 BSC		
L	0.200	-	0.400
eee	0.080		


NOTE: This drawing is subject to change without notice.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

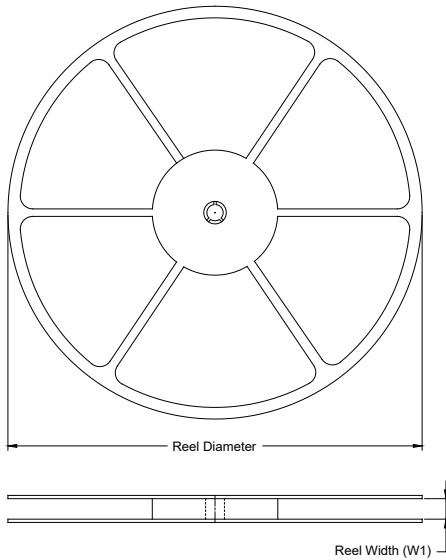

TAPE DIMENSIONS

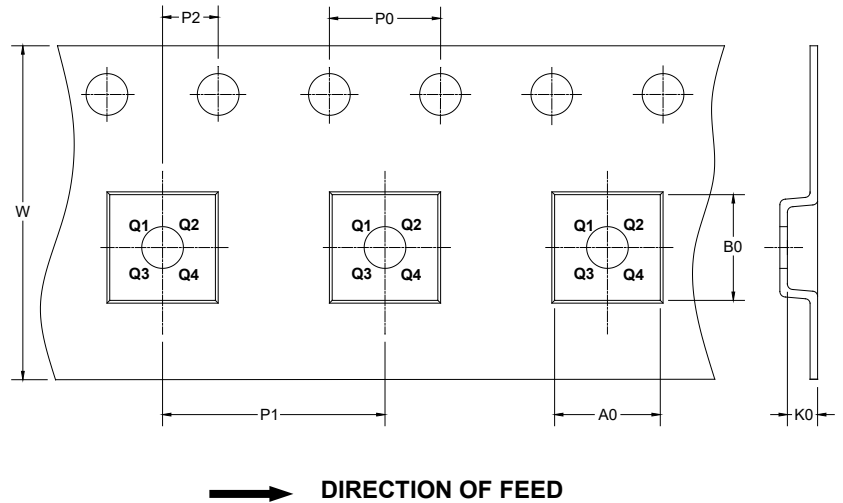

NOTE: The picture is only for reference. Please make the object as the standard.


KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SGM41566A-360F41 XTDE8G/TR	7"	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q1
SGM41566A-360N21 XTDE8G/TR	7"	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q1
SGM41566B-405N21 XTDE8G/TR	7"	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q1
SGM41566B-430N21 XTDE8G/TR	7"	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q1
SGM41566A-360N21 XTDE8DG/TR	7"	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q2
SGM41566B-405N21 XTDE8DG/TR	7"	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q2
SGM41566B-430N21 XTDE8DG/TR	7"	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q2

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS

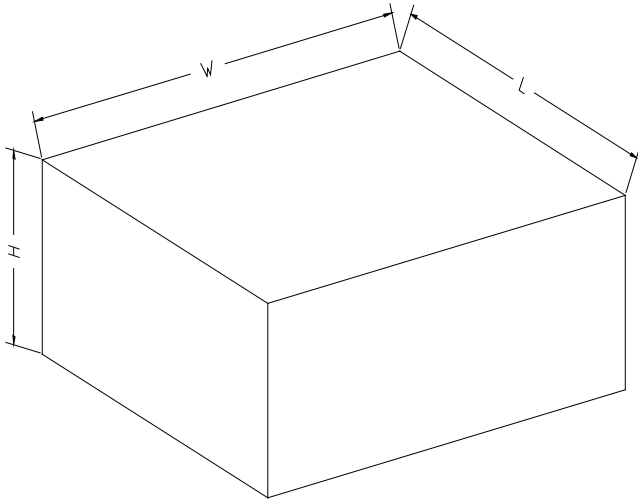

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002